

son

Federal Communications Commission
Washington, D. C. 20554

Approved by OMB
3060-0627
Expires 01/31/98

FOR
FCC
USE
ONLY

2013 JUL 24 A 6:45

500
7/25/13

FCC 302-AM
APPLICATION FOR AM
BROADCAST STATION LICENSE

(Please read instructions before filling out form.)

FOR COMMISSION USE ONLY

FILE NO. *Bmm L-20130718 AHZ*

| | | | |
|---|---|---|---|
| SECTION I - APPLICANT FEE INFORMATION | | | |
| 1. PAYOR NAME (Last, First, Middle Initial) Bonneville International Corporation | | | |
| MAILING ADDRESS (Line 1) (Maximum 35 characters) 55 North 300 West, 2nd Floor | | | |
| MAILING ADDRESS (Line 2) (Maximum 35 characters) | | | |
| CITY Salt Lake City | STATE OR COUNTRY (if foreign address) UT | | ZIP CODE 84101 |
| TELEPHONE NUMBER (include area code) 8015755874 | CALL LETTERS KTAR | OTHER FCC IDENTIFIER (If applicable) FIN 52515 | |
| 2. A. Is a fee submitted with this application? | | | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |
| B. If No, indicate reason for fee exemption (see 47 C.F.R. Section | | | |
| <input type="checkbox"/> Governmental Entity <input type="checkbox"/> Noncommercial educational licensee <input type="checkbox"/> Other (Please explain): | | | |
| C. If Yes, provide the following information: | | | |
| Enter in Column (A) the correct Fee Type Code for the service you are applying for. Fee Type Codes may be found in the "Mass Media Services Fee Filing Guide." Column (B) lists the Fee Multiple applicable for this application. Enter fee amount due in Column (C). | | | |
| (A) FEE TYPE CODE M M R | (B) FEE MULTIPLE 0 0 0 1 | (C) FEE DUE FOR FEE TYPE CODE IN COLUMN (A) \$ 635.00 | FOR FCC USE ONLY |
| To be used only when you are requesting concurrent actions which result in a requirement to list more than one Fee Type Code. | | | |
| (A) M O R | (B) 0 0 0 1 | (C) \$ 730.00 | FOR FCC USE ONLY |
| ADD ALL AMOUNTS SHOWN IN COLUMN C, AND ENTER THE TOTAL HERE. THIS AMOUNT SHOULD EQUAL YOUR ENCLOSED REMITTANCE. | | TOTAL AMOUNT REMITTED WITH THIS APPLICATION \$ 1,365.00 | FOR FCC USE ONLY |

| | | |
|--|-------------|-------------------|
| SECTION II - APPLICANT INFORMATION | | |
| 1. NAME OF APPLICANT Bonneville International Corporation | | |
| MAILING ADDRESS 55 North 300 West, 2nd Floor | | |
| CITY Salt Lake City | STATE UT | ZIP CODE 84101 |

2. This application is for:

Commercial Noncommercial

AM Directional AM Non-Directional

| | | | | |
|----------------------|-------------------------------------|-------------------------------------|--|--|
| Call letters KTAR | Community of License Phoenix, AZ | Construction Permit File No. N/A | Modification of Construction Permit File No(s). N/A | Expiration Date of Last Construction Permit N/A |
|----------------------|-------------------------------------|-------------------------------------|--|--|

3. Is the station now operating pursuant to automatic program test authority in accordance with 47 C.F.R. Section 73.1620?

Yes No
N/A

Exhibit No.

If No, explain in an Exhibit.

4. Have all the terms, conditions, and obligations set forth in the above described construction permit been fully met?

Yes No
N/A

Exhibit No.

If No, state exceptions in an Exhibit.

5. Apart from the changes already reported, has any cause or circumstance arisen since the grant of the underlying construction permit which would result in any statement or representation contained in the construction permit application to be now incorrect?

Yes No
N/A

Exhibit No.

If Yes, explain in an Exhibit.

6. Has the permittee filed its Ownership Report (FCC Form 323) or ownership certification in accordance with 47 C.F.R. Section 73.3615(b)?

Yes No

Does not apply

Exhibit No.

If No, explain in an Exhibit.

7. Has an adverse finding been made or an adverse final action been taken by any court or administrative body with respect to the applicant or parties to the application in a civil or criminal proceeding, brought under the provisions of any law relating to the following: any felony; mass media related antitrust or unfair competition; fraudulent statements to another governmental unit; or discrimination?

Yes No

Exhibit No.

If the answer is Yes, attach as an Exhibit a full disclosure of the persons and matters involved, including an identification of the court or administrative body and the proceeding (by dates and file numbers), and the disposition of the litigation. Where the requisite information has been earlier disclosed in connection with another application or as required by 47 U.S.C. Section 1.65(c), the applicant need only provide: (i) an identification of that previous submission by reference to the file number in the case of an application, the call letters of the station regarding which the application or Section 1.65 information was filed, and the date of filing; and (ii) the disposition of the previously reported matter.

8. Does the applicant, or any party to the application, have a petition on file to migrate to the expanded band (1605-1705 kHz) or a permit or license either in the existing band or expanded band that is held in combination (pursuant to the 5 year holding period allowed) with the AM facility proposed to be modified herein?

Yes No

If Yes, provide particulars as an Exhibit.

Exhibit No.

The APPLICANT hereby waives any claim to the use of any particular frequency or of the electromagnetic spectrum as against the regulatory power of the United States because use of the same, whether by license or otherwise, and requests and authorization in accordance with this application. (See Section 304 of the Communications Act of 1934, as amended).


The APPLICANT acknowledges that all the statements made in this application and attached exhibits are considered material representations and that all the exhibits are a material part hereof and are incorporated herein as set out in full in

CERTIFICATION

1. By checking Yes, the applicant certifies, that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. Section 862, or, in the case of a non-individual applicant (e.g., corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits that includes FCC benefits pursuant to that section. For the definition of a "party" for these purposes, see 47 C.F.R. Section 1.2002(b).

Yes No

2. I certify that the statements in this application are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.
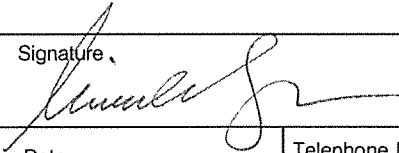
| | | |
|---|---|----------------------------------|
| Name Michael Dowdle | Signature  | |
| Title Vice President and General Counsel | Date 7/16/13 | Telephone Number 801/575-5874 |

WILLFUL FALSE STATEMENTS ON THIS FORM ARE PUNISHABLE BY FINE AND/OR IMPRISONMENT (U.S. CODE, TITLE 18, SECTION 1001), AND/OR REVOCATION OF ANY STATION LICENSE OR CONSTRUCTION

FCC NOTICE TO INDIVIDUALS REQUIRED BY THE PRIVACY ACT AND THE PAPERWORK REDUCTION ACT

The solicitation of personal information requested in this application is authorized by the Communications Act of 1934, as amended. The Commission will use the information provided in this form to determine whether grant of the application is in the public interest. In reaching that determination, or for law enforcement purposes, it may become necessary to refer personal information contained in this form to another government agency. In addition, all information provided in this form will be available for public inspection. If information requested on the form is not provided, the application may be returned without action having been taken upon it or its processing may be delayed while a request is made to provide the missing information. Your response is required to obtain the requested authorization.

Public reporting burden for this collection of information is estimated to average 639 hours and 53 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, can be sent to the Federal Communications Commission, Records Management Branch, Paperwork Reduction Project (3060-0627), Washington, D. C. 20554. Do NOT send completed forms to this address.

THE FOREGOING NOTICE IS REQUIRED BY THE PRIVACY ACT OF 1974, P.L. 93-579, DECEMBER 31, 1974, 5 U.S.C. 552a(e)(3), AND THE PAPERWORK REDUCTION ACT OF 1980, P.L. 96-511, DECEMBER 11, 1980, 44 U.S.C. 3507.

BENJAMIN F. DAWSON III, PE
THOMAS M. ECKELS, PE
STEPHEN S. LOCKWOOD, PE
DAVID J. PINION, PE
ERIK C. SWANSON, PE

THOMAS S. GORTON, PE
MICHAEL H. MEHIGAN, PE

HATFIELD & DAWSON
CONSULTING ELECTRICAL ENGINEERS
9500 GREENWOOD AVE. N.
SEATTLE, WASHINGTON 98103

TELEPHONE (206) 783-9151
FACSIMILE (206) 789-9834
E-MAIL hatdaw@hatdaw.com

JAMES B. HATFIELD, PE
CONSULTANT

MAURY L. HATFIELD, PE
(1942-2009)
PAUL W. LEONARD, PE
(1925-2011)

ENGINEERING REPORT:

APPLICATION FOR LICENSE
and Direct Power Measurement

RADIO STATION KTAR-AM Phoenix, AZ
620 kHz, 5.0 kW, DA-N
Facility ID #52515

July, 2013

**APPLICATION FOR LICENSE
and Direct Power Measurement**

**RADIO STATION KTAR-AM Phoenix, AZ
620 kHz, 5.0 kW, DA-N
Facility ID #52515**

Purpose of Application

- Item 1 Tower Impedance Measurements and Verification of Method of Moments Model
 - Item 2 Derivation of Operating Parameters for Directional Antenna
 - Item 3 Method of Moments Model Details for Towers Driven Individually
 - Item 4 Method of Moments Model Details for Directional Antenna
 - Item 5 Array Geometry
 - Item 6 Sampling System Measurements, Sample Device Description, Antenna Monitor Data
 - Item 7 Reference Field Strength Measurements
 - Item 8 Direct Measurement of Power
 - Item 9 Stability Analysis of Self-Supporting Tower Model
 - Item 10 Method of Moments Model Details for Stability Analysis
 - Item 11 Self-Supporting Tower Physical Details
-
- Appendix A License BS-99 (Most Recent Complete License Document)
 - Appendix B FCC Form 302-AM

WILKINSON) BARKER) KNAUER) LLP

ORIGINAL

2300 N STREET, NW
SUITE 700
WASHINGTON, DC 20037
TEL 202.783.4141
FAX 202.783.5851
www.wbklaw.com

July 17, 2013

VIA OVERNIGHT DELIVERY

Federal Communications Commission
c/o U.S. Bank - Government Lockbox #979089
SL-MO-C2-GL
1005 Convention Plaza
St. Louis, MO 63101

Attention: FCC Government Lockbox

**Re: Lockbox No. 979089
FCC 302-AM License Application
for KTAR(AM), Phoenix, Arizona (FIN 52515)
Fee Codes: MMR and MOR; Total Fee Amount: \$1,365.00**

Dear Sir/Madam,

Bonneville International Corporation (FRN 0006165955), licensee of KTAR(AM), Phoenix, Arizona (FIN 52515), by its counsel, hereby submits in triplicate an FCC 302-AM application for a moment method license for KTAR(AM).

Enclosed is a check made payable to the Federal Communications Commission in the total amount of \$1,365.00 to cover the requisite filing fees, along with a Form 159 (FCC Remittance Advice).

It is respectfully requested that you stamp the receive date on the enclosed copy marked "Stamp and Return" and return it to us for our files. Any questions regarding this matter should be directed to the undersigned.

WILKINSON BARKER KNAUER, LLP

By: 
Patricia M. Chuh


Encl.

Purpose of Application

This engineering exhibit supports an application for a "moment method license" for the presently authorized and unmodified antenna radiation pattern of radio station KTAR, Phoenix, AZ. KTAR is authorized per license to operate on 620 kHz with a power of 5.0 kW day and night, employing a directional antenna for the nighttime operation.

The antenna towers and ground system are unmodified from their long-established conditions and adjustments of the antenna parameters were made in accordance with the terms of the license and specifications provided for the previous licensing of the station. Information is provided herein demonstrating that the directional antenna parameters for the pattern authorized by the station license have been determined in accordance with the requirements of section 73.151(c) of the FCC Rules. The system has been adjusted to produce antenna monitor parameters within +/- 5 percent in ratio and +/- 3 degrees in phase of the modeled values, as required by the Rules. Measurements described in this report were made by Gary Smith, Director of Engineering for Bonneville Phoenix.

Benjamin F. Dawson III, P.E.

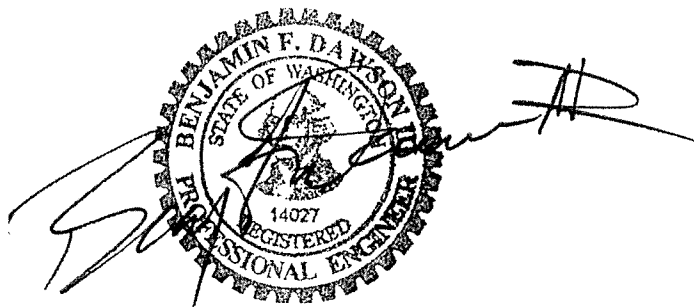

July 12, 2013


Hatfield & Dawson Consulting Engineers

Item 1**Analysis of Tower Impedance Measurements to Verify Method of Moments Model - KTAR**

Tower impedance measurements were made at the locations of the sample system current transformers using an Agilent 4395A network analyzer in a calibrated measurement system. The other towers were open circuited at the same point where impedance measurements were made (the "reference points") for each of the measurements.

Circuit calculations were performed to relate the method of moments modeled impedances at the tower feed points to those at the current sample device locations as shown in the table. The base conditions shown for each tower, which includes the stray capacitances, were used in the moment method model as a load at ground level for the open circuited case. The lighting and static drain chokes used have such high impedances at this frequency that they have not been included in the models.

In addition to the page showing the schematic of the assumed circuit and tabulation of calculated values, a page with the result of calculations using the NETBW circuit analysis program is shown. These calculations show the impedance transformations and phase shifts between the tower base values produced by the MININEC moment method model and the location of the current sample devices used to produce the antenna monitor input signals.

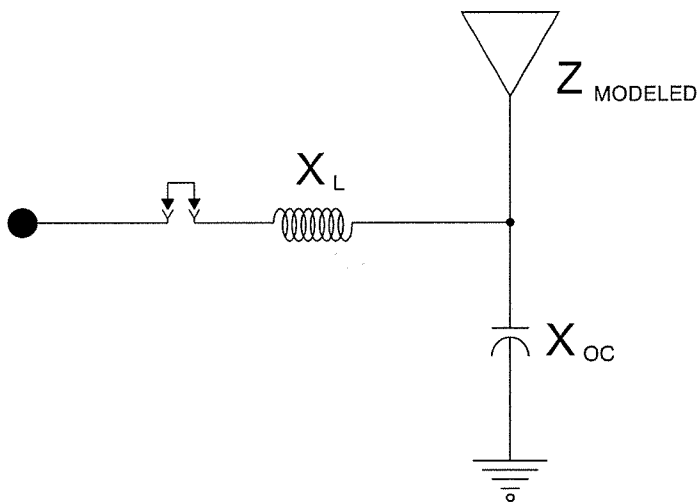

| | X_L | X_{OC} | Z MODELED | Z ATU MODELED | Z ATU MEASURED |
|-----------------------------------|--------|----------|---------------|---------------|----------------|
| TWR #1 WITH TWR #2 OPEN CIRCUITED | +j21.9 | -j1200 | 33.615 -j14.3 | 32.8 +j6.90 | 32.53 +j6.85 |
| TWR #1 WITH TWR #2 GROUNDED | +j21.9 | -j1200 | 34.98 -j14.1 | 34.14 +j6.98 | 33.575 +j6.98 |

| | X_L | X_{OC} | Z MODELED | Z ATU MODELED | Z ATU MEASURED |
|-----------------------------------|--------|----------|----------------|---------------|----------------|
| TWR #2 WITH TWR #1 GROUNDED | +j5.75 | -j1200 | 16.932 -j66.75 | 15.19 +j57.7 | 15.183 -j57.68 |
| TWR #2 WITH TWR #1 OPEN CIRCUITED | +j5.75 | -j1200 | 15.19 -j64.8 | 13.67 -j55.9 | 14.203 -j55.59 |

NETBW CALCULATION OF IMPEDANCE AT ATU OUTPUT (SAMPLE
 DEVICE/IMPEDANCE MEASUREMENT LOCATION) AS MODIFIED BY BASE
 CAPACITANCE AND FEED PIPE SERIES INDUCTANCE

FOR MODELING PARAMETER CALCULATION

TOWER #1 (S) WITH TOWER 2 OPEN CIRCUITED AND LOADED WITH -J1200

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 33.615 | -14.259 | 32.80501 | 6.900285 |
| -1.585746 | | | | |

TOWER #1 (S) WITH TOWER 2 SHORT CIRCUITED

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 34.981 | -14.1 | 34.14487 | 6.979958 |
| -1.650366 | | | | |

TOWER #2 (N) WITH TOWER 1 OPEN CIRCUITED AND LOADED WITH -J1200

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 15.186 | -64.803 | 13.66777 | -55.89688 |
| -0.6878953 | | | | |


TOWER #2 (N) WITH TOWER 1 SHORT CIRCUITED

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 16.932 | -66.747 | 15.19194 | -57.68305 |
| -0.7657996 | | | | |

Item 2**Derivation of Operating Parameters for Directional Antenna - KTAR**

The method of moments model of the array, following verification with the measured individual open circuited base impedances, was used for directional antenna calculations. Calculations were made to determine the complex voltage values for sources located at ground level at the base of each tower of the array to produce current moment sums for the towers that, when normalized, equated to the theoretical field parameters of the authorized directional antenna patterns. With these voltage sources, the tower currents and phases were calculated. 14 and 15 segments were used for towers in the moment method model. The currents and voltages at the tower bases (segments 1, and 15) were used to calculate the currents at the sample device locations by Kirchoff's law, using the analysis program NETBW.

| Tower | Modeled Current Pulse | Base Current Magnitude | Base Current Phase | Antenna Monitor Sample Ratio | Antenna Monitor Sample Phase |
|-------|-----------------------|------------------------|--------------------|------------------------------|------------------------------|
| 1 S | 1 | 11.0889 | 10.5 | 1.0 | 0 |
| 2 N | 15 | 8.95317 | 82.9 | 0.828 | 70.8 |

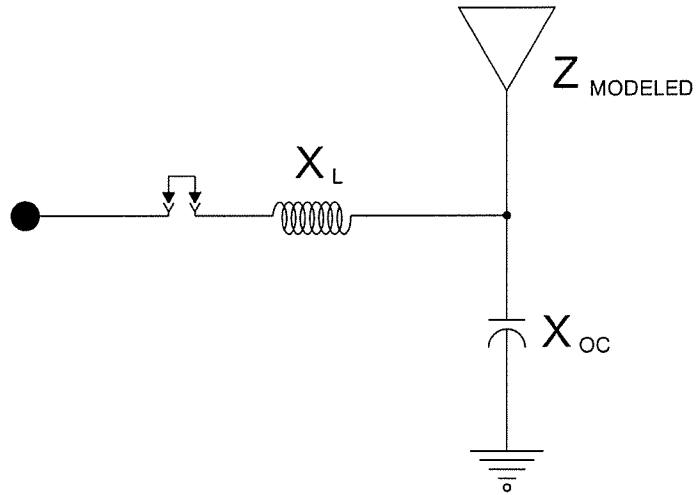

| TOWER | $X_L (\Omega)$ | $X_{OC} (\Omega)$ | INPUT Z | LOAD Z | CURRENT PHASE DELTA |
|--------|----------------|-------------------|-------------|-----------------|---------------------|
| TWR #1 | +j21.9 | -j1200 | 36.53 -j8.1 | 38.385 -j29.565 | -1.788 |
| TWR #2 | +j5.75 | -j1200 | 3.16 -j52.5 | 3.493 -j61.23 | -0.159 |

NETBW CALCULATION OF IMPEDANCE AT ATU OUTPUT (SAMPLE DEVICE LOCATION) AS MODIFIED BY BASE CAPACITANCE AND FEED PIPE SERIES INDUCTANCE

FOR DIRECTIONAL OPERATION PARAMETER CALCULATION

TOWER #1 (S)

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 38.385 | -29.565 | 36.52565 | -8.094378 |
| -1.7881 | | | | |

TOWER #2 (N)

| FREQUENCY (KHZ) | LOAD RESISTANCE | LOAD REACTANCE | INPUT RESISTANCE | INPUT REACTANCE |
|--------------------|--------------------|-------------------|---------------------|--------------------|
| 620 | 3.493 | -61.23 | 3.162053 | -52.51618 |
| -0.1586814 | | | | |

Item 3**Method of Moments Model Details for Towers Driven Individually - KTAR**

The array of towers was modeled using MININEC. Because the towers are tapered, self-supporting structures, five wires were used to represent each tower. The top and bottom wire end points were specified using the theoretical directional antenna specifications in electrical degrees. The towers were modeled using 2 wire segments for the bottom (base region) wire of the taller tower and 3 segments for the upper wires on the taller tower and for the shorter tower, with the wire radii calculated to be identical to the average radius for each wire. The towers are physically 90.8 and 68.1 degrees in electrical height, 400 and 300 feet respectively.* The taller tower was modeled with a correction of 0.5% and the shorter tower with a correction of 6.0%. The maximum and minimum segment lengths are 9.123 and 4.81 electrical degrees respectively.

Each tower's modeled height relative to its physical height falls within the required range of 75 to 125 percent and each modeled radius falls within the required range of 80 percent to 150 percent of the radius of a circle having a circumference equal to the sum of the widths of the tower sides.

| Tower # | Physical Height (degrees) | Modeled Height (degrees) | Modeled Percentage of Height | Modeled Radius (feet) | Percent of Equivalent Radius |
|---------|---------------------------|--------------------------|------------------------------|-----------------------|------------------------------|
| 1 SW | 90.77 | 91.22 | 100.5 | See Drawing | 100.0 |
| 2 NE | 68.08 | 72.16 | 106.0 | Item 11 | 100.0 |

The following pages show the details of the method of moments models for the individually driven towers.

*Note that the station's authorizations show the correct physical heights for the towers, but electrical heights which are truncated to the nearest 0.1 degree rather than properly rounded.

TOWER #1 DRIVEN WITH TOWER #2 LOADED WITH -J1200

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 12:10:07

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 2 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 3 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 3 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 3 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 3 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 3 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 3 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 3 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 3 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 3 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 29

| | minimum | maximum |
|----------------------|------------|------------|
| Individual wires | wire value | wire value |
| segment length | 9 21.2 | 1 40.2 |
| segment/radius ratio | 6 2.24173 | 5 10.5845 |
| radius | 10 2.218 | 1 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| frequency | | no. of steps | segment length (wavelengths) | | |
|------------|------|--------------|------------------------------|----------|----------|
| no. lowest | step | | minimum | maximum | |
| 1 | .62 | 0 | 1 | .0133632 | .0253397 |

Sources

| source | node | sector | magnitude | phase | type |
|--------|------|--------|-----------|-------|---------|
| 1 | 1 | 1 | 690.242 | 340.5 | voltage |

Lumped loads

| load | node | resistance (ohms) | reactance (ohms) | inductance (mH) | capacitance (uF) | passive circuit |
|------|------|-------------------|------------------|-----------------|------------------|-----------------|
| 1 | 15 | 0 | -1,200. | 0 | 0 | 0 |

Hatfield & Dawson Consulting Engineers

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 12:10:07

IMPEDANCE

normalization = 50.

| freq (MHz) | resist (ohms) | react (ohms) | imped (ohms) | phase (deg) | VSWR | S11 dB | S12 dB |
|---------------|------------------|-----------------|-----------------|----------------|--------|-----------|-----------|
| .62 | 33.615 | -14.259 | 36.514 | 337. | 1.6884 | -11.833 | -.29453 |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 12:10:07

CURRENT rms

Frequency = .62 MHz
 Input power = 5,000. watts
 Efficiency = 100. %

coordinates in feet

| current no. | X | Y | Z | mag (amps) | phase (deg) | real (amps) | imaginary (amps) |
|----------------|---------|----------|-------|---------------|----------------|----------------|---------------------|
| GND | 0 | 0 | 0 | 12.1959 | 3.5 | 12.1734 | .741405 |
| 2 | 0 | 0 | 40.2 | 11.6015 | 357.8 | 11.5931 | -.440208 |
| END | 0 | 0 | 80.4 | 10.9644 | 355.8 | 10.9352 | -.799684 |
| 2J1 | 0 | 0 | 80.4 | 10.9644 | 355.8 | 10.9352 | -.799684 |
| 4 | 0 | 0 | 107.2 | 10.5031 | 354.9 | 10.4608 | -.94221 |
| 5 | 0 | 0 | 134. | 9.90077 | 353.9 | 9.84546 | -1.04506 |
| END | 0 | 0 | 160.8 | 9.13308 | 353.1 | 9.06609 | -1.10416 |
| 2J2 | 0 | 0 | 160.8 | 9.13308 | 353.1 | 9.06609 | -1.10416 |
| 7 | 0 | 0 | 187.6 | 8.41913 | 352.4 | 8.34517 | -1.1135 |
| 8 | 0 | 0 | 214.4 | 7.55768 | 351.7 | 7.47934 | -1.08537 |
| END | 0 | 0 | 241.2 | 6.52035 | 351.1 | 6.44134 | -1.012 |
| 2J3 | 0 | 0 | 241.2 | 6.52035 | 351.1 | 6.44134 | -1.012 |
| 10 | 0 | 0 | 268. | 5.64972 | 350.6 | 5.57351 | -.924796 |
| 11 | 0 | 0 | 294.8 | 4.63168 | 350.1 | 4.56225 | -.798955 |
| END | 0 | 0 | 321.6 | 3.44138 | 349.5 | 3.384 | -.62583 |
| 2J4 | 0 | 0 | 321.6 | 3.44138 | 349.5 | 3.384 | -.62583 |
| 13 | 0 | 0 | 348.4 | 2.50659 | 349.1 | 2.46159 | -.47282 |
| 14 | 0 | 0 | 375.2 | 1.41954 | 348.7 | 1.39207 | -.277924 |
| END | 0 | 0 | 402. | 0 | 0 | 0 | 0 |
| GND | 706.568 | -360.014 | 0 | .0946757 | 148. | -.0803019 | .0501506 |
| 16 | 706.568 | -360.014 | 21.2 | .323648 | 148. | -.274469 | .171507 |
| 17 | 706.568 | -360.014 | 42.4 | .374196 | 148. | -.317219 | .198482 |
| END | 706.568 | -360.014 | 63.6 | .419566 | 147.9 | -.355489 | .222852 |
| 2J6 | 706.568 | -360.014 | 63.6 | .419566 | 147.9 | -.355489 | .222852 |
| 19 | 706.568 | -360.014 | 84.8 | .440718 | 147.9 | -.373199 | .234424 |
| 20 | 706.568 | -360.014 | 106. | .45012 | 147.8 | -.380892 | .239852 |
| END | 706.568 | -360.014 | 127.2 | .446482 | 147.7 | -.377483 | .238439 |
| 2J7 | 706.568 | -360.014 | 127.2 | .446482 | 147.7 | -.377483 | .238439 |
| 22 | 706.568 | -360.014 | 148.4 | .433318 | 147.6 | -.366056 | .231878 |
| 23 | 706.568 | -360.014 | 169.6 | .409143 | 147.6 | -.345299 | .219468 |
| END | 706.568 | -360.014 | 190.8 | .371641 | 147.5 | -.313282 | .199928 |
| 2J8 | 706.568 | -360.014 | 190.8 | .371641 | 147.5 | -.313282 | .199928 |
| 25 | 706.568 | -360.014 | 212. | .334117 | 147.4 | -.281367 | .180186 |
| 26 | 706.568 | -360.014 | 233.2 | .285115 | 147.3 | -.239815 | .154206 |
| END | 706.568 | -360.014 | 254.4 | .222229 | 147.1 | -.186654 | .120607 |
| 2J9 | 706.568 | -360.014 | 254.4 | .222229 | 147.1 | -.186654 | .120607 |
| 28 | 706.568 | -360.014 | 275.6 | .166517 | 147. | -.139692 | .0906312 |


```

29      706.568  -360.014  296.8      .0976542 146.9  -.0818071 .0533286
END     706.568  -360.014  318.      0         0         0         0

```

TOWER #1 DRIVEN WITH TOWER #2 BASE SHORTED TO GROUND

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:31:33

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 2 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 3 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 3 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 3 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 3 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 3 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 3 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 3 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 3 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 3 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 29

| | minimum | | maximum | |
|----------------------|---------|---------|---------|---------|
| Individual wires | wire | value | wire | value |
| segment length | 9 | 21.2 | 1 | 40.2 |
| segment/radius ratio | 6 | 2.24173 | 5 | 10.5845 |
| radius | 10 | 2.218 | 1 | 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| frequency | | no. of | | segment length (wavelengths) | |
|------------|------|--------|---------|------------------------------|----------|
| no. lowest | step | steps | minimum | maximum | |
| 1 | .62 | 0 | 1 | .0133632 | .0253397 |

Sources

Hatfield & Dawson Consulting Engineers

```
source node      sector magnitude      phase      type
1             1             1       690.242    340.5     voltage
```

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:31:33

IMPEDANCE

normalization = 50.

```
freq      resist      react      impeded      phase      VSWR      S11      S12
(MHz)     (ohms)     (ohms)     (ohms)     (deg)
source = 1; node 1, sector 1
.62      34.981     -14.1      37.716     338.      1.6286   -12.427  -.25576
```

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:31:33

CURRENT rms

Frequency = .62 MHz

Input power = 5,000. watts

Efficiency = 100. %

coordinates in feet

```
current
no.      X          Y          Z          mag      phase      real      imaginary
          (amps)     (deg)     (amps)     (amps)
GND      0          0          0          11.9556  2.5       11.9446  .511781
2        0          0          40.2       11.3826  356.6     11.3622  -.681394
END      0          0          80.4       10.7627  354.5     10.7129  -1.03471
2J1      0          0          80.4       10.7627  354.5     10.7129  -1.03471
4        0          0          107.2      10.3126  353.5     10.2459  -1.17051
5        0          0          134.       9.72371  352.5     9.64134  -1.26303
END      0          0          160.8      8.9721   351.6     8.8763   -1.30764
2J2      0          0          160.8      8.9721   351.6     8.8763   -1.30764
7        0          0          187.6      8.27242  350.9     8.1692   -1.30269
8        0          0          214.4      7.42756  350.3     7.32048  -1.25664
END      0          0          241.2      6.40942  349.6     6.30339  -1.16101
2J3      0          0          241.2      6.40942  349.6     6.30339  -1.16101
10       0          0          268.       5.55449  349.1     5.45344  -1.05469
11       0          0          294.8      4.55437  348.5     4.46333  -.906097
END      0          0          321.6      3.38454  348.      3.3101   -.70595
2J4      0          0          321.6      3.38454  348.      3.3101   -.70595
13       0          0          348.4      2.4655   347.6     2.40754  -.531446
14       0          0          375.2      1.39646  347.1     1.36133  -.311285
END      0          0          402.       0         0         0         0
GND      706.568   -360.014  0          1.7636   134.5     -1.23713  1.2569
16       706.568   -360.014  21.2       1.75361  134.5     -1.23006  1.24983
17       706.568   -360.014  42.4       1.72361  134.5     -1.20885  1.22861
END      706.568   -360.014  63.6       1.67097  134.5     -1.17164  1.19138
2J6      706.568   -360.014  63.6       1.67097  134.5     -1.17164  1.19138
19       706.568   -360.014  84.8       1.6097   134.5     -1.12836  1.14801
20       706.568   -360.014  106.       1.52728  134.5     -1.07017  1.08965
END      706.568   -360.014  127.2      1.4198   134.5     -.99434   1.01347
2J7      706.568   -360.014  127.2      1.4198   134.5     -.99434   1.01347
22       706.568   -360.014  148.4      1.31719  134.4     -.922011  .940681
23       706.568   -360.014  169.6      1.19216  134.4     -.833971  .851896
END      706.568   -360.014  190.8      1.0398   134.3     -.726822  .743585
2J8      706.568   -360.014  190.8      1.0398   134.3     -.726822  .743585
25       706.568   -360.014  212.       .908452  134.3     -.634569  .650083
26       706.568   -360.014  233.2      .753585  134.3     -.525952  .53969
```

| | | | | | | | |
|-----|---------|----------|-------|---------|-------|----------|---------|
| END | 706.568 | -360.014 | 254.4 | .570919 | 134.2 | -.398056 | .409268 |
| 2J9 | 706.568 | -360.014 | 254.4 | .570919 | 134.2 | -.398056 | .409268 |
| 28 | 706.568 | -360.014 | 275.6 | .419117 | 134.2 | -.29196 | .300696 |
| 29 | 706.568 | -360.014 | 296.8 | .240733 | 134.1 | -.167522 | .172884 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

TOWER #2 DRIVEN WITH TOWER #1 LOADED WITH -J1200

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:28:32

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 2 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 3 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 3 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 3 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 3 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 3 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 3 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 3 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 3 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 3 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 29

| | minimum | maximum |
|----------------------|------------|------------|
| Individual wires | wire value | wire value |
| segment length | 9 21.2 | 1 40.2 |
| segment/radius ratio | 6 2.24173 | 5 10.5845 |
| radius | 10 2.218 | 1 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| no. | lowest frequency | step | no. of steps | segment length (wavelengths) minimum | maximum |
|-----|------------------|------|--------------|--------------------------------------|----------|
| 1 | .62 | 0 | 1 | .0133632 | .0253397 |

Hatfield & Dawson Consulting Engineers

```
Sources
source node      sector magnitude      phase      type
1      15         1      690.242    340.5     voltage
```

```
Lumped loads
load node      resistance      reactance      inductance      capacitance      passive
1      1         0      (ohms)      (ohms)      (mH)      (uF)      circuit
1      1         0      -1,200.     0           0           0
```

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:28:32

IMPEDANCE

```
normalization = 50.
freq      resist      react      imped      phase      VSWR      S11      S12
(MHz)     (ohms)     (ohms)     (ohms)     (deg)
source = 1; node 15, sector 1
.62      15.186     -64.803    66.558     283.2     9.0158    -1.9348    -4.4431
```

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:28:32

CURRENT rms

```
Frequency = .62 MHz
Input power = 5,000. watts
Efficiency = 100. %
coordinates in feet
```

```
current
no.      X          Y          Z          mag      phase      real      imaginary
GND      0          0          0          .146713  200.9     -.137017  -.0524518
2        0          0          40.2       .635921  200.9     -.594081  -.226855
END      0          0          80.4       .765819  200.8     -.715979  -.271761
2J1      0          0          80.4       .765819  200.8     -.715979  -.271761
4        0          0          107.2      .809071  200.7     -.756816  -.286051
5        0          0          134.       .829657  200.6     -.776572  -.292005
END      0          0          160.8     .824959  200.5     -.772786  -.288721
2J2      0          0          160.8     .824959  200.5     -.772786  -.288721
7        0          0          187.6     .80106   200.4     -.750932  -.278922
8        0          0          214.4     .755404  200.2     -.708728  -.26142
END      0          0          241.2     .683628  200.1     -.642031  -.234827
2J3      0          0          241.2     .683628  200.1     -.642031  -.234827
10       0          0          268.       .612524  200.       -.575737  -.209076
11       0          0          294.8     .519301  199.8     -.488592  -.175932
END      0          0          321.6     .399357  199.6     -.376179  -.134071
2J4      0          0          321.6     .399357  199.6     -.376179  -.134071
13       0          0          348.4     .297999  199.5     -.280966  -.0993039
14       0          0          375.2     .17302   199.3     -.163307  -.0571555
END      0          0          402.       0         0         0         0
GND      706.568    -360.014   0          18.1452  57.3      9.7998    15.2713
16       706.568    -360.014   21.2       15.6766  55.3      8.92976   12.8847
17       706.568    -360.014   42.4       14.8334  54.7      8.57777   12.1017
END      706.568    -360.014   63.6       13.7995  54.       8.11391   11.1621
2J6      706.568    -360.014   63.6       13.7995  54.       8.11391   11.1621
19       706.568    -360.014   84.8       12.9207  53.5     7.68639   10.3857
20       706.568    -360.014   106.       11.9332  53.       7.17889   9.53235
END      706.568    -360.014   127.2     10.808   52.5     6.57362   8.57905
2J7      706.568    -360.014   127.2     10.808   52.5     6.57362   8.57905
```

| | | | | | | | |
|-----|---------|----------|-------|---------|------|---------|---------|
| 22 | 706.568 | -360.014 | 148.4 | 9.83239 | 52.2 | 6.03015 | 7.76616 |
| 23 | 706.568 | -360.014 | 169.6 | 8.72653 | 51.8 | 5.39695 | 6.85749 |
| END | 706.568 | -360.014 | 190.8 | 7.46089 | 51.4 | 4.6541 | 5.83131 |
| 2J8 | 706.568 | -360.014 | 190.8 | 7.46089 | 51.4 | 4.6541 | 5.83131 |
| 25 | 706.568 | -360.014 | 212. | 6.42246 | 51.1 | 4.03219 | 4.99895 |
| 26 | 706.568 | -360.014 | 233.2 | 5.24653 | 50.8 | 3.316 | 4.06573 |
| END | 706.568 | -360.014 | 254.4 | 3.91133 | 50.5 | 2.48962 | 3.01667 |
| 2J9 | 706.568 | -360.014 | 254.4 | 3.91133 | 50.5 | 2.48962 | 3.01667 |
| 28 | 706.568 | -360.014 | 275.6 | 2.83686 | 50.2 | 1.81534 | 2.17998 |
| 29 | 706.568 | -360.014 | 296.8 | 1.60889 | 49.9 | 1.03534 | 1.2315 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

TOWER #2 DRIVEN WITH TOWER #1 BASE SHORTED TO GROUND

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:30:12

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 2 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 3 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 3 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 3 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 3 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 3 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 3 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 3 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 3 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 3 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 29

| | minimum | maximum |
|----------------------|------------|------------|
| Individual wires | wire value | wire value |
| segment length | 9 21.2 | 1 40.2 |
| segment/radius ratio | 6 2.24173 | 5 10.5845 |
| radius | 10 2.218 | 1 13.153 |

Hatfield & Dawson Consulting Engineers

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| no. | lowest | step | frequency | no. of steps | segment length (wavelengths) minimum | maximum |
|-----|--------|------|-----------|--------------|--------------------------------------|----------|
| 1 | .62 | 0 | | 1 | .0133632 | .0253397 |

Sources

| source | node | sector | magnitude | phase | type |
|--------|------|--------|-----------|-------|---------|
| 1 | 15 | 1 | 690.242 | 340.5 | voltage |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:30:12

IMPEDANCE

normalization = 50.

| freq (MHz) | resist (ohms) | react (ohms) | imped (ohms) | phase (deg) | VSWR | S11 dB | S12 dB |
|-------------------------------|---------------|--------------|--------------|-------------|--------|---------|---------|
| source = 1; node 15, sector 1 | | | | | | | |
| .62 | 16.932 | -66.747 | 68.861 | 284.2 | 8.4356 | -2.0691 | -4.2136 |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:30:12

CURRENT rms

Frequency = .62 MHz

Input power = 5,000. watts

Efficiency = 100. %

coordinates in feet

| current | no. | X | Y | Z | mag (amps) | phase (deg) | real (amps) | imaginary (amps) |
|---------|---------|----------|-------|-------|------------|-------------|-------------|------------------|
| GND | 0 | 0 | 0 | 0 | 4.62943 | 134.6 | -3.24777 | 3.29904 |
| 2 | 0 | 0 | 0 | 40.2 | 4.56693 | 134.5 | -3.20369 | 3.25473 |
| END | 0 | 0 | 0 | 80.4 | 4.36192 | 134.5 | -3.0591 | 3.10938 |
| 2J1 | 0 | 0 | 0 | 80.4 | 4.36192 | 134.5 | -3.0591 | 3.10938 |
| 4 | 0 | 0 | 0 | 107.2 | 4.19813 | 134.5 | -2.9437 | 2.99315 |
| 5 | 0 | 0 | 0 | 134. | 3.97432 | 134.5 | -2.78607 | 2.83426 |
| END | 0 | 0 | 0 | 160.8 | 3.68084 | 134.5 | -2.57948 | 2.62581 |
| 2J2 | 0 | 0 | 0 | 160.8 | 3.68084 | 134.5 | -2.57948 | 2.62581 |
| 7 | 0 | 0 | 0 | 187.6 | 3.40301 | 134.5 | -2.38403 | 2.42835 |
| 8 | 0 | 0 | 0 | 214.4 | 3.06361 | 134.5 | -2.14544 | 2.18696 |
| END | 0 | 0 | 0 | 241.2 | 2.65086 | 134.4 | -1.8555 | 1.89319 |
| 2J3 | 0 | 0 | 0 | 241.2 | 2.65086 | 134.4 | -1.8555 | 1.89319 |
| 10 | 0 | 0 | 0 | 268. | 2.30184 | 134.4 | -1.61055 | 1.64457 |
| 11 | 0 | 0 | 0 | 294.8 | 1.89134 | 134.4 | -1.32268 | 1.35192 |
| END | 0 | 0 | 0 | 321.6 | 1.40873 | 134.3 | -.98459 | 1.00752 |
| 2J4 | 0 | 0 | 0 | 321.6 | 1.40873 | 134.3 | -.98459 | 1.00752 |
| 13 | 0 | 0 | 0 | 348.4 | 1.02793 | 134.3 | -.718099 | .73551 |
| 14 | 0 | 0 | 0 | 375.2 | .583291 | 134.3 | -.407252 | .417581 |
| END | 0 | 0 | 0 | 402. | 0 | 0 | 0 | 0 |
| GND | 706.568 | -360.014 | 0 | 0 | 17.1843 | 56.3 | 9.54311 | 14.2909 |
| 16 | 706.568 | -360.014 | 21.2 | 0 | 14.7812 | 54. | 8.69094 | 11.9563 |
| 17 | 706.568 | -360.014 | 42.4 | 0 | 13.9687 | 53.3 | 8.34697 | 11.2006 |
| END | 706.568 | -360.014 | 63.6 | 0 | 12.9772 | 52.5 | 7.89408 | 10.3 |
| 2J6 | 706.568 | -360.014 | 63.6 | 0 | 12.9772 | 52.5 | 7.89408 | 10.3 |
| 19 | 706.568 | -360.014 | 84.8 | 0 | 12.1388 | 52. | 7.47706 | 9.56267 |
| 20 | 706.568 | -360.014 | 106. | 0 | 11.2007 | 51.4 | 6.98236 | 8.75794 |
| END | 706.568 | -360.014 | 127.2 | 0 | 10.1352 | 50.9 | 6.39265 | 7.86487 |

| | | | | | | | |
|-----|---------|----------|-------|---------|------|---------|---------|
| 2J7 | 706.568 | -360.014 | 127.2 | 10.1352 | 50.9 | 6.39265 | 7.86487 |
| 22 | 706.568 | -360.014 | 148.4 | 9.21392 | 50.5 | 5.86341 | 7.10751 |
| 23 | 706.568 | -360.014 | 169.6 | 8.17185 | 50.1 | 5.24699 | 6.26484 |
| END | 706.568 | -360.014 | 190.8 | 6.98159 | 49.6 | 4.52407 | 5.31746 |
| 2J8 | 706.568 | -360.014 | 190.8 | 6.98159 | 49.6 | 4.52407 | 5.31746 |
| 25 | 706.568 | -360.014 | 212. | 6.00659 | 49.3 | 3.91903 | 4.55196 |
| 26 | 706.568 | -360.014 | 233.2 | 4.90402 | 48.9 | 3.2225 | 3.69661 |
| END | 706.568 | -360.014 | 254.4 | 3.65376 | 48.5 | 2.41902 | 2.7383 |
| 2J9 | 706.568 | -360.014 | 254.4 | 3.65376 | 48.5 | 2.41902 | 2.7383 |
| 28 | 706.568 | -360.014 | 275.6 | 2.64883 | 48.3 | 1.76361 | 1.97635 |
| 29 | 706.568 | -360.014 | 296.8 | 1.50152 | 47.9 | 1.00569 | 1.11497 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

Method of Moments Model Details for Directional Antenna- KTAR

The array was modeled using MININEC with the individual tower characteristics that were verified by the respective tower impedance measurements. Calculations were made to determine the complex voltage values for sources located at ground level under each tower of the array to produce current moment sums for the towers that, when normalized, equated to the theoretical field parameters of the authorized directional antenna pattern. The following pages contain details of the method of moments model of the directional antenna pattern.

| Tower | Wire | Base Node |
|-------|------|-----------|
| 1 SW | 1 | 1 |
| 2 NE | 6 | 15 |

MOMENT METHOD MODEL FOR DRIVEN ARRAY**ARRAY SYNTHESIS TO PRODUCE DRIVE VOLTAGES**

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:33:26

MEDIUM WAVE ARRAY SYNTHESIS FROM FIELD RATIOS

Frequency = .62 MHz

| | field ratio | |
|-------|-------------|-------------|
| tower | magnitude | phase (deg) |
| 1 | 1. | 0 |
| 2 | .55 | 82. |

VOLTAGES AND CURRENTS - rms

| source | voltage | | current | |
|--------|-----------|-------------|-----------|-------------|
| node | magnitude | phase (deg) | magnitude | phase (deg) |
| 1 | 482.89 | 342.3 | 11.0889 | 10.5 |
| 15 | 549.117 | 356.2 | 8.95318 | 82.9 |

Sum of square of source currents = 406.246

Total power = 5,000. watts

TOWER ADMITTANCE MATRIX

| admittance | real (mhos) | imaginary (mhos) |
|------------|-------------|------------------|
| Y(1, 1) | .0245917 | .00991245 |
| Y(1, 2) | -.0035178 | .00171185 |
| Y(2, 1) | -.00351675 | .00171175 |
| Y(2, 2) | .00357071 | .0140761 |

TOWER IMPEDANCE MATRIX

| impedance | real (ohms) | imaginary (ohms) |
|-----------|-------------|------------------|
| Z(1, 1) | 33.5436 | -14.2844 |
| Z(1, 2) | -5.60219 | -8.06451 |
| Z(2, 1) | -5.60284 | -8.06708 |
| Z(2, 2) | 15.111 | -64.8284 |

MOMENT METHOD MODEL WITH DIRECTIONAL DRIVE VOLTAGES

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:33:48

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 2 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 3 |
| | | 0 | 0 | 160.8 | | |

Hatfield & Dawson Consulting Engineers

| | | | | | | |
|----|------|------|-----|-------|-------|---|
| 3 | none | 0 | 0 | 160.8 | 7.254 | 3 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 3 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 3 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 3 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 3 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 3 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 3 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 3 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 29

| | minimum | | maximum | |
|----------------------|---------|---------|---------|---------|
| Individual wires | wire | value | wire | value |
| segment length | 9 | 21.2 | 1 | 40.2 |
| segment/radius ratio | 6 | 2.24173 | 5 | 10.5845 |
| radius | 10 | 2.218 | 1 | 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| no. | lowest | step | no. of steps | segment length (wavelengths) minimum | maximum |
|-----|--------|------|--------------|--------------------------------------|----------|
| 1 | .62 | 0 | 1 | .0133632 | .0253397 |

Sources

| source node | sector | magnitude | phase | type |
|-------------|--------|-----------|-------|---------|
| 1 | 1 | 682.909 | 342.3 | voltage |
| 2 | 15 | 776.568 | 356.2 | voltage |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:33:48

IMPEDANCE

normalization = 50.

| freq (MHz) | resist (ohms) | react (ohms) | imped (ohms) | phase (deg) | VSWR | S11 dB | S12 dB |
|-------------------------------|---------------|--------------|--------------|-------------|--------|---------|---------|
| source = 1; node 1, sector 1 | | | | | | | |
| .62 | 38.385 | -20.565 | 43.547 | 331.8 | 1.7037 | -11.692 | -.30462 |
| source = 2; node 15, sector 1 | | | | | | | |
| .62 | 3.493 | -61.232 | 61.332 | 273.3 | 35.824 | -.48504 | -9.7603 |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:33:48

CURRENT rms

Frequency = .62 MHz
Input power = 5,000. watts

Efficiency = 100. %
 coordinates in feet
 current

| no. | X | Y | Z | mag (amps) | phase (deg) | real (amps) | imaginary (amps) |
|-----|---------|----------|-------|---------------|----------------|----------------|---------------------|
| GND | 0 | 0 | 0 | 11.0889 | 10.5 | 10.9027 | 2.02343 |
| 2 | 0 | 0 | 40.2 | 10.3699 | 3.9 | 10.3455 | .71207 |
| END | 0 | 0 | 80.4 | 9.74893 | 1.6 | 9.74533 | .264846 |
| 2J1 | 0 | 0 | 80.4 | 9.74893 | 1.6 | 9.74533 | .264846 |
| 4 | 0 | 0 | 107.2 | 9.31657 | .4 | 9.31633 | .0660413 |
| 5 | 0 | 0 | 134. | 8.76337 | 359.3 | 8.76274 | -.104914 |
| END | 0 | 0 | 160.8 | 8.06759 | 358.3 | 8.06384 | -.246077 |
| 2J2 | 0 | 0 | 160.8 | 8.06759 | 358.3 | 8.06384 | -.246077 |
| 7 | 0 | 0 | 187.6 | 7.42623 | 357.5 | 7.41896 | -.328712 |
| 8 | 0 | 0 | 214.4 | 6.65698 | 356.7 | 6.64576 | -.386401 |
| END | 0 | 0 | 241.2 | 5.73519 | 355.9 | 5.72025 | -.413756 |
| 2J3 | 0 | 0 | 241.2 | 5.73519 | 355.9 | 5.72025 | -.413756 |
| 10 | 0 | 0 | 268. | 4.96438 | 355.3 | 4.94746 | -.409407 |
| 11 | 0 | 0 | 294.8 | 4.06561 | 354.7 | 4.04791 | -.378916 |
| END | 0 | 0 | 321.6 | 3.01748 | 354. | 3.00093 | -.315639 |
| 2J4 | 0 | 0 | 321.6 | 3.01748 | 354. | 3.00093 | -.315639 |
| 13 | 0 | 0 | 348.4 | 2.1961 | 353.5 | 2.18207 | -.247861 |
| 14 | 0 | 0 | 375.2 | 1.24267 | 353. | 1.23345 | -.151089 |
| END | 0 | 0 | 402. | 0 | 0 | 0 | 0 |
| GND | 706.568 | -360.014 | 0 | 8.95317 | 82.9 | 1.10277 | 8.885 |
| 16 | 706.568 | -360.014 | 21.2 | 7.79515 | 82.5 | 1.02284 | 7.72775 |
| 17 | 706.568 | -360.014 | 42.4 | 7.39124 | 82.3 | .987438 | 7.32498 |
| END | 706.568 | -360.014 | 63.6 | 6.89152 | 82.2 | .939228 | 6.82722 |
| 2J6 | 706.568 | -360.014 | 63.6 | 6.89152 | 82.2 | .939228 | 6.82722 |
| 19 | 706.568 | -360.014 | 84.8 | 6.46259 | 82.1 | .893273 | 6.40056 |
| 20 | 706.568 | -360.014 | 106. | 5.97746 | 81.9 | .837532 | 5.91849 |
| END | 706.568 | -360.014 | 127.2 | 5.42152 | 81.8 | .769925 | 5.36657 |
| 2J7 | 706.568 | -360.014 | 127.2 | 5.42152 | 81.8 | .769925 | 5.36657 |
| 22 | 706.568 | -360.014 | 148.4 | 4.93745 | 81.8 | .708435 | 4.88636 |
| 23 | 706.568 | -360.014 | 169.6 | 4.3869 | 81.7 | .636069 | 4.34054 |
| END | 706.568 | -360.014 | 190.8 | 3.75487 | 81.6 | .550389 | 3.71431 |
| 2J8 | 706.568 | -360.014 | 190.8 | 3.75487 | 81.6 | .550389 | 3.71431 |
| 25 | 706.568 | -360.014 | 212. | 3.235 | 81.5 | .478104 | 3.19948 |
| 26 | 706.568 | -360.014 | 233.2 | 2.64506 | 81.4 | .39431 | 2.6155 |
| END | 706.568 | -360.014 | 254.4 | 1.9738 | 81.3 | .296973 | 1.95133 |
| 2J9 | 706.568 | -360.014 | 254.4 | 1.9738 | 81.3 | .296973 | 1.95133 |
| 28 | 706.568 | -360.014 | 275.6 | 1.43265 | 81.3 | .217076 | 1.41611 |
| 29 | 706.568 | -360.014 | 296.8 | .813157 | 81.2 | .124139 | .803626 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

CURRENT MOMENT VALUES GENERATED FROM MININEC MODEL OF DRIVEN ARRAY

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:34:55

CURRENT MOMENTS (amp-feet) rms

Frequency = .62 MHz

Input power = 5,000. watts

vertical current moment

Hatfield & Dawson Consulting Engineers

| wire | magnitude | phase (deg) | magnitude | phase (deg) |
|------|-----------|-------------|-----------|-------------|
| 1 | 359.609 | 5.1 | 359.609 | 5.1 |
| 2 | 311.722 | 359.9 | 311.722 | 359.9 |
| 3 | 242.398 | 357.1 | 242.398 | 357.1 |
| 4 | 154.865 | 355.1 | 154.865 | 355.1 |
| 5 | 57.1536 | 353.5 | 57.1536 | 353.5 |
| 6 | 211.173 | 82.5 | 211.173 | 82.5 |
| 7 | 169.941 | 82. | 169.941 | 82. |
| 8 | 127.137 | 81.7 | 127.137 | 81.7 |
| 9 | 79.9091 | 81.5 | 79.9091 | 81.5 |
| 10 | 29.5415 | 81.3 | 29.5415 | 81.3 |

Medium wave array vertical current moment (amps-feet) rms
 (Calculation assumes tower wires are grouped together.
 The first wire of each group must contain the source.)

| tower | magnitude | phase (deg) | normalized |
|-------|-----------|-------------|--------------------|
| 1 | 1,123.07 | 0.0 | 1.0 / 0 |
| 2 | 617.688 | 82. | 0.55 / <u>82.0</u> |

Item 5
Array Geometry – KTAR

Per the provisions of the Commission's Public Notice DA 09-2340, October 29, 2009, paragraph 5, licensed stations applying to be re-licensed under the MM Docket 93-177 Rules are exempt from the requirement to submit an as-built surveyor's certification when there is no change in the theoretical patterns, as is the case in this application.

Item 6**Sampling System Measurements – KTAR**

The KTAR sample system has a single solid outer conductor foam insulated coaxial cable to each tower. At each tower the coaxial cable is directly connected to the current transformer. Impedance measurements were made of the antenna monitor sampling system using an Agilent 4395A network analyzer and calibrated measurement system.

The measurements were made looking into the antenna monitor ends of the sampling lines for two conditions: with the far end open circuited for length and impedance determination, and with the current sampling device connected as in normal operation.

The following table shows the frequency closest to the carrier frequency where resonance (zero reactance corresponding with low resistance) was found. As frequencies of series resonance occur at odd multiples of 90 degrees electrical length, the sampling line length at the resonant frequency above carrier frequency, which is the closest one to the carrier frequency, was found to be 270 electrical degrees. The electrical length at carrier frequency appearing in the table below was calculated by ratioing the carrier frequency to the resonant frequency.

| Tower | Sampling Line Open-Circuited Resonance (kHz) | Sampling Line Electrical Length at 620 kHz (Degrees) | 620 kHz Measured Impedance with Sample Device Connected |
|--------------|--|--|---|
| Tower 1 (SW) | 746.0 | 224.40 | 56.0 -j 1.3 |
| Tower 2 (NE) | 745.3 | 224.6 | 58.1 -j 2.0 |

The sampling line lengths meet the requirement that they be equal in length within 1 electrical degree.

In order to determine the characteristic impedance values of the sampling lines, open-circuited measurements were made with frequencies offset to produce +/- 45 degrees of electrical length from resonance. The characteristic impedance was calculated using the following formula, where $R_1 + j X_1$ and $R_2 + j X_2$ are the measured impedances of the +45 and -45 degree offset frequencies, respectively:

$$Z_0 = ((R_1^2 + X_1^2)^{1/2} \times (R_2^2 + X_2^2)^{1/2})^{1/2}$$

| Line # | high R | high X | Low R | low X | Z high | Z low | Z average |
|--------|--------|--------|-------|---------|--------|--------|-----------|
| 1 | 10.389 | 49.82 | 8.389 | -52.477 | 50.89 | 53.114 | 52.00 |
| 2 | 10.521 | 49.89 | 8.664 | -53.125 | 50.99 | 53.83 | 52.41 |

The sampling line measured characteristic impedances meet the requirement that they be equal within 2 Ohms.

The current sample devices were calibrated by measuring their outputs with the Agilent 4395A network analyzer. The two sample devices were placed side by side monitoring the output of an amplifier used with the network analyzer terminated in a load. Their outputs were connected to the inputs of the network analyzer with equal short lengths of coaxial cable.

| Tower # | Serial Number | Current | Phase |
|---------|---------------|---------|-------|
| 1 | 18130 | 0.690 | -0.2 |
| 2 | 18128 | 0.690 | -0.1 |

All transformers are Delta Electronics model TCT-3.

Indicated current error zero with a manufacturer's tolerance of 4% (+/- 2%).

Indicated phase error 0.1 degree with a manufacturer's tolerance of 4 degrees (+/-2°).

The station's antenna monitor, a Potomac Instruments AM-1901, was calibrated by reference to the network analyzer.


Item 7**Reference Field Strength Measurements - KTAR**

Reference field strength measurements were made along radials at the azimuths with radiation values specified on the current license and additionally on the major lobe radials for the directional pattern. The measurements were made with a Potomac Instruments model FIM-41, serial number 666. This meter has had its indications compared on all scales and at frequencies throughout the MF band with those of Potomac Instruments FIM-41 serial number 647, owned by Hatfield & Dawson, which was calibrated by the manufacturer on April 11, 2013. The indications were found to agree well within the manufacturer's rated accuracy for the instrument.

The measured field strengths, point descriptions, and measured coordinates (WGS-84) are shown on the following page.

KTAR AM Reference Points

| Radial | Point | Lat/Long | Dist | Reading | Description |
|---|-------|---------------------------------|---------|---------|--|
| 84° | 1 | 33.48094251 -111.98010838 NAD83 | 2.07 kM | 150 mv | End of Driveway @ 2920 N 47th ST. |
| | 2 | 33.48261898 -111.96118172 NAD83 | 3.8 kM | 85 mv | End of Driveway at 3018 E. N 56th St. Frontage Rd. |
| | 3 | 33.48400574 -111.94574060 NAD83 | 5.2 kM | 66 mv | End of Driveway @ 6261 E. Earll |
| 207° | 1 | 33.46947371 -112.00810902 NAD83 | 1.1 kM | 600 mv | End of Driveway @ 3407 E. Palm Lane |
| | 2 | 33.46303288 -112.01205657 NAD83 | 1.9 kM | 350 mv | Canal North side East of 32nd St. @ Steps |
| | 3 | 33.44403418 -112.02346814 NAD83 | 4.3 kM | 112 mv | Air Lane East of Gate 108 North Side |
| 270° | 1 | 33.47913757 -112.01724087 NAD83 | 1.3 kM | 680 mv | End of Driveway @ 2819 30th St. |
| | 2 | 33.47922224 -112.02704003 NAD83 | 2.28 kM | 420 mv | 2813/2819 25th Place Between Homes @ Curb |
| | 3 | 33.47929506 -112.03685817 NAD83 | 3.2 kM | 320 mv | End of Driveway @ 2820 E. 21st Street |
| 329° | 1 | 33.48557695 -112.00713329 NAD83 | .83 kM | 300 mv | SE Corner of 34th Place and Flower |
| | 2 | 33.49155890 -112.01149880 NAD83 | 1.6 kM | 175 mv | 3230/3236 E. Clarendon Between Homes @ Curb |
| | 3 | 33.49877519 -112.01665508 NAD83 | 2.56 kM | 130 mv | End of Driveway on South Side @ 3016 Glenrosa |
| Antenna Monitor Ratio .828 Phase +70.8° Common Point 50+j0 10.4 Amps 5,408 Watts | | | | | |
| Power as per 47 CFR 73.51 2 (b) (1) which states shall exceed nominal by 8% for station 5000 watts and under on directional antenna | | | | | |

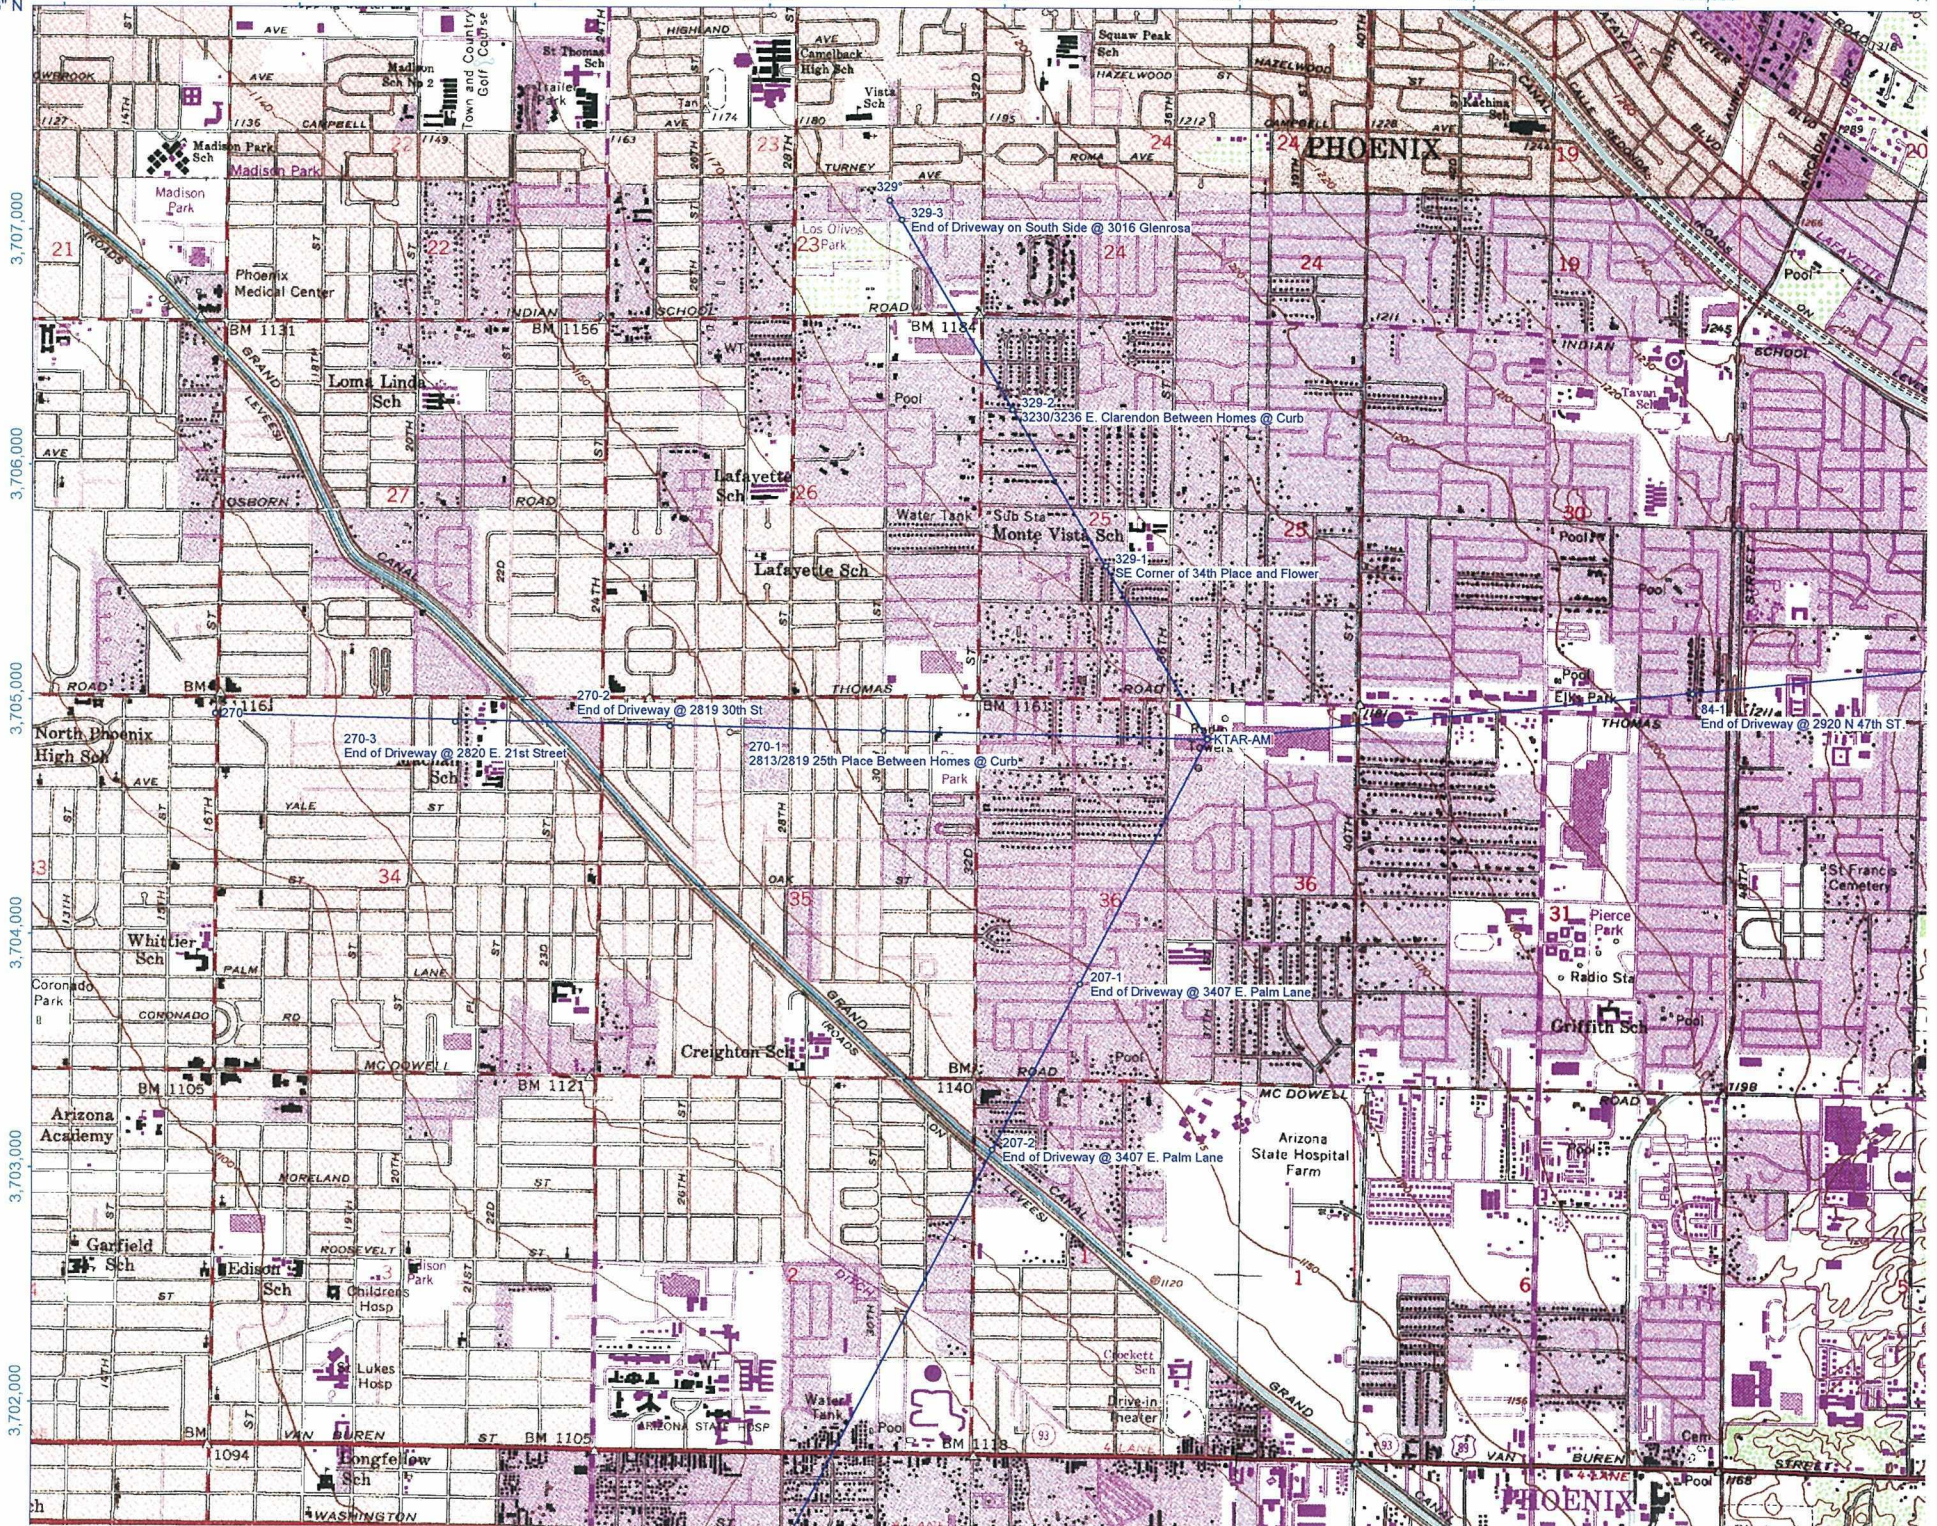

Item 8**Direct Measurement of Power - KTAR**

Common point impedance measurements were made with an Agilent 4395A network analyzer in a calibrated measurement system. The measurements were made at the phasor cabinet input adjacent to the common point current meter used to determine operating power. The impedance measured at this point was adjusted to a value of 50 ohms +/- j0 for the night common point network.

Item 9

Stability Analysis of Self-Supporting Tower Model

The method of moments model of the KTAR array uses a “wedding cake” characterization of each tower to account for its vertical taper. The towers are not equal in physical height. Five wires, cascading down in radius with increasing height, were used to represent each tower. Each wire was modeled with three segments except the bottom segment on the #1 (S) taller tower, for which two segments were used.

All wire segments, when checked using the “problem definition evaluation” function of MININEC Broadcast Professional Version 14, have no errors relative to the software's specified geometry guidelines. As shown on the evaluation summary of the following page, however, “warnings” are given due to the segment length-to-radius ratio for certain of the largest radius segments. Under the guidelines, which consider a segment length-to-radius ratio under 2.0 to constitute an error, a warning is given for a ratio between 2.0 and 8.0 as a cautionary measure.

In order to evaluate the stability of the KTAR directional antenna Method of Moments model, additional models were run with the same wire lengths and radius values but with smaller and larger numbers of segments per wire. The model used for analyzing the KTAR directional antenna pattern has 14 (#1) or 15 (#2) segments per tower. Additional models were run with one less segment per wire, having a total of 9 or 10 segments per tower, and with an additional segment per wire, having a total of 19 or 20 segments per tower.

Tower 1, which is taller, has the largest bottom-wire modeled radius. The tower 1 base impedance was calculated using each of the three stability evaluation models. Tower 2 was modeled with the base grounded to compare with the base impedance measurement calculation model.

| Total Segments for Towers | Minimum Segment Length to Radius Ratio | Resistance (Ohms) | Difference (Ohms) | Reactance (Ohms) | Difference (Ohms) |
|---------------------------|--|-------------------|-------------------|------------------|-------------------|
| 19 | 3.36 | 34.657 | 0.324 | -14.814 | 0.714 |
| 29 | 2.24 | 34.981 | Reference | -14.1 | Reference |
| 39 | 1.68 | 35.072 | 0.091 | -13.757 | 0.343 |

The MININEC modeled base resistances and reactances remain well within the +/- 2 ohm and +/- 4 percent range required for matching measured and modeled resistance and reactance by the FCC Rules. Remaining essentially unchanged with segment lengths both smaller and greater than used in the KTAR directional antenna pattern model, the real and imaginary components indicate convergence of the results. The model is therefore valid with regard to the characteristics of the self-supporting towers of the KTAR array.

Item 10**Method of Moments Model Detail for Stability Analysis**MININEC EVALUATION FOR SEGMENTATION USED IN ANALYSIS OF ARRAY

C:\Expert MBPro V.14\ktar5wire7norm seg for st 06-24-2013 08:36:50

PROBLEM DEFINITION EVALUATION
 maximum frequency = .62 MHz
 shortest wavelength = 483.548 meters
 number of wires = 10

INDIVIDUAL WIRES

segment length to wavelength ratio: No detected violations!
 segment length to radius ratio:
 wire 1 - warning 3.056337
 wire 2 - warning 2.74253
 wire 3 - warning 3.694513
 wire 4 - warning 5.658784
 wire 6 - warning 2.241726
 wire 7 - warning 2.800898
 wire 8 - warning 3.732395
 wire 9 - warning 5.592191
 radius to wavelength ratio: No detected violations!
 checking for wires in ground plane: No detected violations!

WIRE JUNCTIONS

junction segment length ratio: No detected violations!
 junction radius ratio: No detected violations!

ELECTRICAL DESCRIPTION

No detected violations!

STABILITY ANALYSIS USING ONE LESS SEGMENT FOR EACH WIRE

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:37:12

KTARtest4

GEOMETRY

Dimensions in feet
 Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 1 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 2 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 2 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 2 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 2 |
| | | 0 | 0 | 402. | | |

| | | | | | | |
|----|------|------|-----|-------|-------|---|
| 6 | none | 793. | 27. | 0 | 9.457 | 2 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 2 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 2 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 2 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 2 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 19

| | minimum | | maximum | |
|----------------------|---------|---------|---------|---------|
| Individual wires | wire | value | wire | value |
| segment length | 9 | 31.8 | 1 | 80.4 |
| segment/radius ratio | 6 | 3.36259 | 5 | 15.8768 |
| radius | 10 | 2.218 | 1 | 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| frequency | | | no. of steps | segment length (wavelengths) | |
|-----------|--------|------|--------------|------------------------------|----------|
| no. | lowest | step | | minimum | maximum |
| 1 | .62 | 0 | 1 | .0200449 | .0506795 |

Sources

| source | node | sector | magnitude | phase | type |
|--------|------|--------|-----------|-------|---------|
| 1 | 1 | 1 | 690.242 | 340.5 | voltage |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:37:12

IMPEDANCE

normalization = 50.

| freq (MHz) | resist (ohms) | react (ohms) | imped (ohms) | phase (deg) | VSWR | S11 (dB) | S12 (dB) |
|------------------------------|---------------|--------------|--------------|-------------|--------|----------|----------|
| source = 1; node 1, sector 1 | | | | | | | |
| .62 | 34.657 | -14.814 | 37.69 | 336.9 | 1.6602 | -12.105 | -.27605 |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 13:37:12

CURRENT rms

Frequency = .62 MHz
Input power = 5,000. watts
Efficiency = 100. %
coordinates in feet

| current | no. | X | Y | Z | mag (amps) | phase (deg) | real (amps) | imaginary (amps) |
|---------|-----|---|---|-------|------------|-------------|-------------|------------------|
| | 1 | 0 | 0 | 0 | 12.0113 | 3.6 | 11.987 | .763579 |
| END | 0 | 0 | 0 | 80.4 | 10.8365 | 356.9 | 10.8209 | -.582091 |
| 2J1 | 0 | 0 | 0 | 80.4 | 10.8365 | 356.9 | 10.8209 | -.582091 |
| 3 | 0 | 0 | 0 | 120.6 | 10.0759 | 355.7 | 10.0472 | -.760116 |
| END | 0 | 0 | 0 | 160.8 | 8.99279 | 354.3 | 8.94826 | -.893901 |
| 2J2 | 0 | 0 | 0 | 160.8 | 8.99279 | 354.3 | 8.94826 | -.893901 |
| 5 | 0 | 0 | 0 | 201. | 7.86963 | 353.3 | 7.81556 | -.920844 |
| END | 0 | 0 | 0 | 241.2 | 6.40277 | 352.3 | 6.34435 | -.862904 |
| 2J3 | 0 | 0 | 0 | 241.2 | 6.40277 | 352.3 | 6.34435 | -.862904 |

| | | | | | | | |
|-----|---------|----------|-------|---------|-------|----------|----------|
| 7 | 0 | 0 | 281.4 | 5.04798 | 351.5 | 4.99228 | -.747812 |
| END | 0 | 0 | 321.6 | 3.36478 | 350.7 | 3.32015 | -.546174 |
| 2J4 | 0 | 0 | 321.6 | 3.36478 | 350.7 | 3.32015 | -.546174 |
| 9 | 0 | 0 | 361.8 | 1.91691 | 350. | 1.88796 | -.331872 |
| END | 0 | 0 | 402. | 0 | 0 | 0 | 0 |
| GND | 706.568 | -360.014 | 0 | 1.73966 | 137.6 | -1.28502 | 1.17267 |
| 11 | 706.568 | -360.014 | 31.8 | 1.7175 | 137.6 | -1.26853 | 1.15786 |
| END | 706.568 | -360.014 | 63.6 | 1.64768 | 137.6 | -1.21659 | 1.11119 |
| 2J6 | 706.568 | -360.014 | 63.6 | 1.64768 | 137.6 | -1.21659 | 1.11119 |
| 13 | 706.568 | -360.014 | 95.4 | 1.54852 | 137.6 | -1.14288 | 1.04486 |
| END | 706.568 | -360.014 | 127.2 | 1.39846 | 137.5 | -1.03144 | .944363 |
| 2J7 | 706.568 | -360.014 | 127.2 | 1.39846 | 137.5 | -1.03144 | .944363 |
| 15 | 706.568 | -360.014 | 159. | 1.23702 | 137.5 | -.911701 | .836079 |
| END | 706.568 | -360.014 | 190.8 | 1.02223 | 137.4 | -.752639 | .691735 |
| 2J8 | 706.568 | -360.014 | 190.8 | 1.02223 | 137.4 | -.752639 | .691735 |
| 17 | 706.568 | -360.014 | 222.6 | .817333 | 137.4 | -.601171 | .553738 |
| END | 706.568 | -360.014 | 254.4 | .558918 | 137.3 | -.410555 | .379255 |
| 2J9 | 706.568 | -360.014 | 254.4 | .558918 | 137.3 | -.410555 | .379255 |
| 19 | 706.568 | -360.014 | 286.2 | .323087 | 137.2 | -.237021 | .219559 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

STABILITY ANALYSIS USING AN ADDITIONAL SEGMENT FOR EACH WIRE

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:15:57

KTARtest4

GEOMETRY

Dimensions in feet

Environment: perfect ground

| wire | caps | Distance | Angle | Z | radius | segs |
|------|------|----------|-------|-------|--------|------|
| 1 | none | 0 | 0 | 0 | 13.153 | 3 |
| | | 0 | 0 | 80.4 | | |
| 2 | none | 0 | 0 | 80.4 | 9.772 | 4 |
| | | 0 | 0 | 160.8 | | |
| 3 | none | 0 | 0 | 160.8 | 7.254 | 4 |
| | | 0 | 0 | 241.2 | | |
| 4 | none | 0 | 0 | 241.2 | 4.736 | 4 |
| | | 0 | 0 | 321.6 | | |
| 5 | none | 0 | 0 | 321.6 | 2.532 | 4 |
| | | 0 | 0 | 402. | | |
| 6 | none | 793. | 27. | 0 | 9.457 | 4 |
| | | 793. | 27. | 63.6 | | |
| 7 | none | 793. | 27. | 63.6 | 7.569 | 4 |
| | | 793. | 27. | 127.2 | | |
| 8 | none | 793. | 27. | 127.2 | 5.68 | 4 |
| | | 793. | 27. | 190.8 | | |
| 9 | none | 793. | 27. | 190.8 | 3.791 | 4 |
| | | 793. | 27. | 254.4 | | |
| 10 | none | 793. | 27. | 254.4 | 2.218 | 4 |
| | | 793. | 27. | 318. | | |

Number of wires = 10
current nodes = 39

minimum

maximum

| | | | | |
|----------------------|------|---------|------|---------|
| Individual wires | wire | value | wire | value |
| segment length | 9 | 15.9 | 1 | 26.8 |
| segment/radius ratio | 6 | 1.68129 | 5 | 7.93839 |
| radius | 10 | 2.218 | 1 | 13.153 |

ELECTRICAL DESCRIPTION

Frequencies (MHz)

| no. | lowest | step | no. of steps | segment length (wavelengths) minimum | maximum |
|-----|--------|------|--------------|--------------------------------------|----------|
| 1 | .62 | 0 | 1 | .0100224 | .0168932 |

Sources

| source | node | sector | magnitude | phase | type |
|--------|------|--------|-----------|-------|---------|
| 1 | 1 | 1 | 690.242 | 340.5 | voltage |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:15:57

IMPEDANCE

normalization = 50.

| freq (MHz) | resist (ohms) | react (ohms) | imped (ohms) | phase (deg) | VSWR | S11 dB | S12 dB |
|------------------------------|---------------|--------------|--------------|-------------|--------|---------|---------|
| source = 1; node 1, sector 1 | | | | | | | |
| .62 | 35.072 | -13.757 | 37.673 | 338.6 | 1.6163 | -12.558 | -.24794 |

C:\Expert MBPro V.14\ktar5wire7 06-20-2013 15:15:57

CURRENT rms

Frequency = .62 MHz


Input power = 5,000. watts

Efficiency = 100. %

coordinates in feet

| current no. | X | Y | Z | mag (amps) | phase (deg) | real (amps) | imaginary (amps) |
|-------------|---|---|-------|------------|-------------|-------------|------------------|
| GND | 0 | 0 | 0 | 11.9401 | 1.9 | 11.9334 | .399444 |
| 2 | 0 | 0 | 26.8 | 11.4637 | 356. | 11.4356 | -.801402 |
| 3 | 0 | 0 | 53.6 | 11.1799 | 354.6 | 11.1301 | -1.05418 |
| END | 0 | 0 | 80.4 | 10.7283 | 353. | 10.6482 | -1.30851 |
| 2J1 | 0 | 0 | 80.4 | 10.7283 | 353. | 10.6482 | -1.30851 |
| 5 | 0 | 0 | 100.5 | 10.4139 | 352.3 | 10.319 | -1.40275 |
| 6 | 0 | 0 | 120.6 | 10.0137 | 351.5 | 9.90443 | -1.47554 |
| 7 | 0 | 0 | 140.7 | 9.54004 | 350.8 | 9.41827 | -1.51939 |
| END | 0 | 0 | 160.8 | 8.96305 | 350.1 | 8.83078 | -1.53413 |
| 2J2 | 0 | 0 | 160.8 | 8.96305 | 350.1 | 8.83078 | -1.53413 |
| 9 | 0 | 0 | 180.9 | 8.45987 | 349.6 | 8.32188 | -1.52176 |
| 10 | 0 | 0 | 201. | 7.86449 | 349.1 | 7.72318 | -1.48419 |
| 11 | 0 | 0 | 221.1 | 7.20125 | 348.6 | 7.05963 | -1.4211 |
| END | 0 | 0 | 241.2 | 6.41717 | 348.1 | 6.27901 | -1.32444 |
| 2J3 | 0 | 0 | 241.2 | 6.41717 | 348.1 | 6.27901 | -1.32444 |
| 13 | 0 | 0 | 261.3 | 5.79932 | 347.7 | 5.66647 | -1.23418 |
| 14 | 0 | 0 | 281.4 | 5.08296 | 347.3 | 4.95893 | -1.11605 |
| 15 | 0 | 0 | 301.5 | 4.30441 | 346.9 | 4.19272 | -.974196 |
| END | 0 | 0 | 321.6 | 3.39994 | 346.5 | 3.30581 | -.794462 |
| 2J4 | 0 | 0 | 321.6 | 3.39994 | 346.5 | 3.30581 | -.794462 |
| 17 | 0 | 0 | 341.7 | 2.73441 | 346.2 | 2.65533 | -.652877 |
| 18 | 0 | 0 | 361.8 | 1.96751 | 345.9 | 1.90796 | -.480398 |
| 19 | 0 | 0 | 381.9 | 1.12574 | 345.5 | 1.09009 | -.281065 |
| END | 0 | 0 | 402. | 0 | 0 | 0 | 0 |

| | | | | | | | |
|-----|---------|----------|-------|---------|-------|----------|---------|
| GND | 706.568 | -360.014 | 0 | 1.77306 | 132.9 | -1.20663 | 1.29915 |
| 21 | 706.568 | -360.014 | 15.9 | 1.76743 | 132.9 | -1.20277 | 1.29505 |
| 22 | 706.568 | -360.014 | 31.8 | 1.75051 | 132.9 | -1.19116 | 1.28274 |
| 23 | 706.568 | -360.014 | 47.7 | 1.72206 | 132.9 | -1.17163 | 1.26205 |
| END | 706.568 | -360.014 | 63.6 | 1.68027 | 132.9 | -1.14296 | 1.23164 |
| 2J6 | 706.568 | -360.014 | 63.6 | 1.68027 | 132.9 | -1.14296 | 1.23164 |
| 25 | 706.568 | -360.014 | 79.5 | 1.6364 | 132.8 | -1.11288 | 1.19971 |
| 26 | 706.568 | -360.014 | 95.4 | 1.58008 | 132.8 | -1.07428 | 1.1587 |
| 27 | 706.568 | -360.014 | 111.3 | 1.51238 | 132.8 | -1.0279 | 1.10937 |
| END | 706.568 | -360.014 | 127.2 | 1.42877 | 132.8 | -.970664 | 1.04842 |
| 2J7 | 706.568 | -360.014 | 127.2 | 1.42877 | 132.8 | -.970664 | 1.04842 |
| 29 | 706.568 | -360.014 | 143.1 | 1.35429 | 132.8 | -.919716 | .994099 |
| 30 | 706.568 | -360.014 | 159. | 1.26574 | 132.8 | -.859187 | .929458 |
| 31 | 706.568 | -360.014 | 174.9 | 1.16628 | 132.7 | -.791262 | .856809 |
| END | 706.568 | -360.014 | 190.8 | 1.04791 | 132.7 | -.710499 | .770265 |
| 2J8 | 706.568 | -360.014 | 190.8 | 1.04791 | 132.7 | -.710499 | .770265 |
| 33 | 706.568 | -360.014 | 206.7 | .952292 | 132.7 | -.645329 | .700294 |
| 34 | 706.568 | -360.014 | 222.6 | .841061 | 132.6 | -.569599 | .618822 |
| 35 | 706.568 | -360.014 | 238.5 | .719145 | 132.6 | -.486694 | .529432 |
| END | 706.568 | -360.014 | 254.4 | .5771 | 132.5 | -.390236 | .425158 |
| 2J9 | 706.568 | -360.014 | 254.4 | .5771 | 132.5 | -.390236 | .425158 |
| 37 | 706.568 | -360.014 | 270.3 | .466452 | 132.5 | -.315205 | .343835 |
| 38 | 706.568 | -360.014 | 286.2 | .338426 | 132.5 | -.228516 | .249625 |
| 39 | 706.568 | -360.014 | 302.1 | .196255 | 132.4 | -.132403 | .144864 |
| END | 706.568 | -360.014 | 318. | 0 | 0 | 0 | 0 |

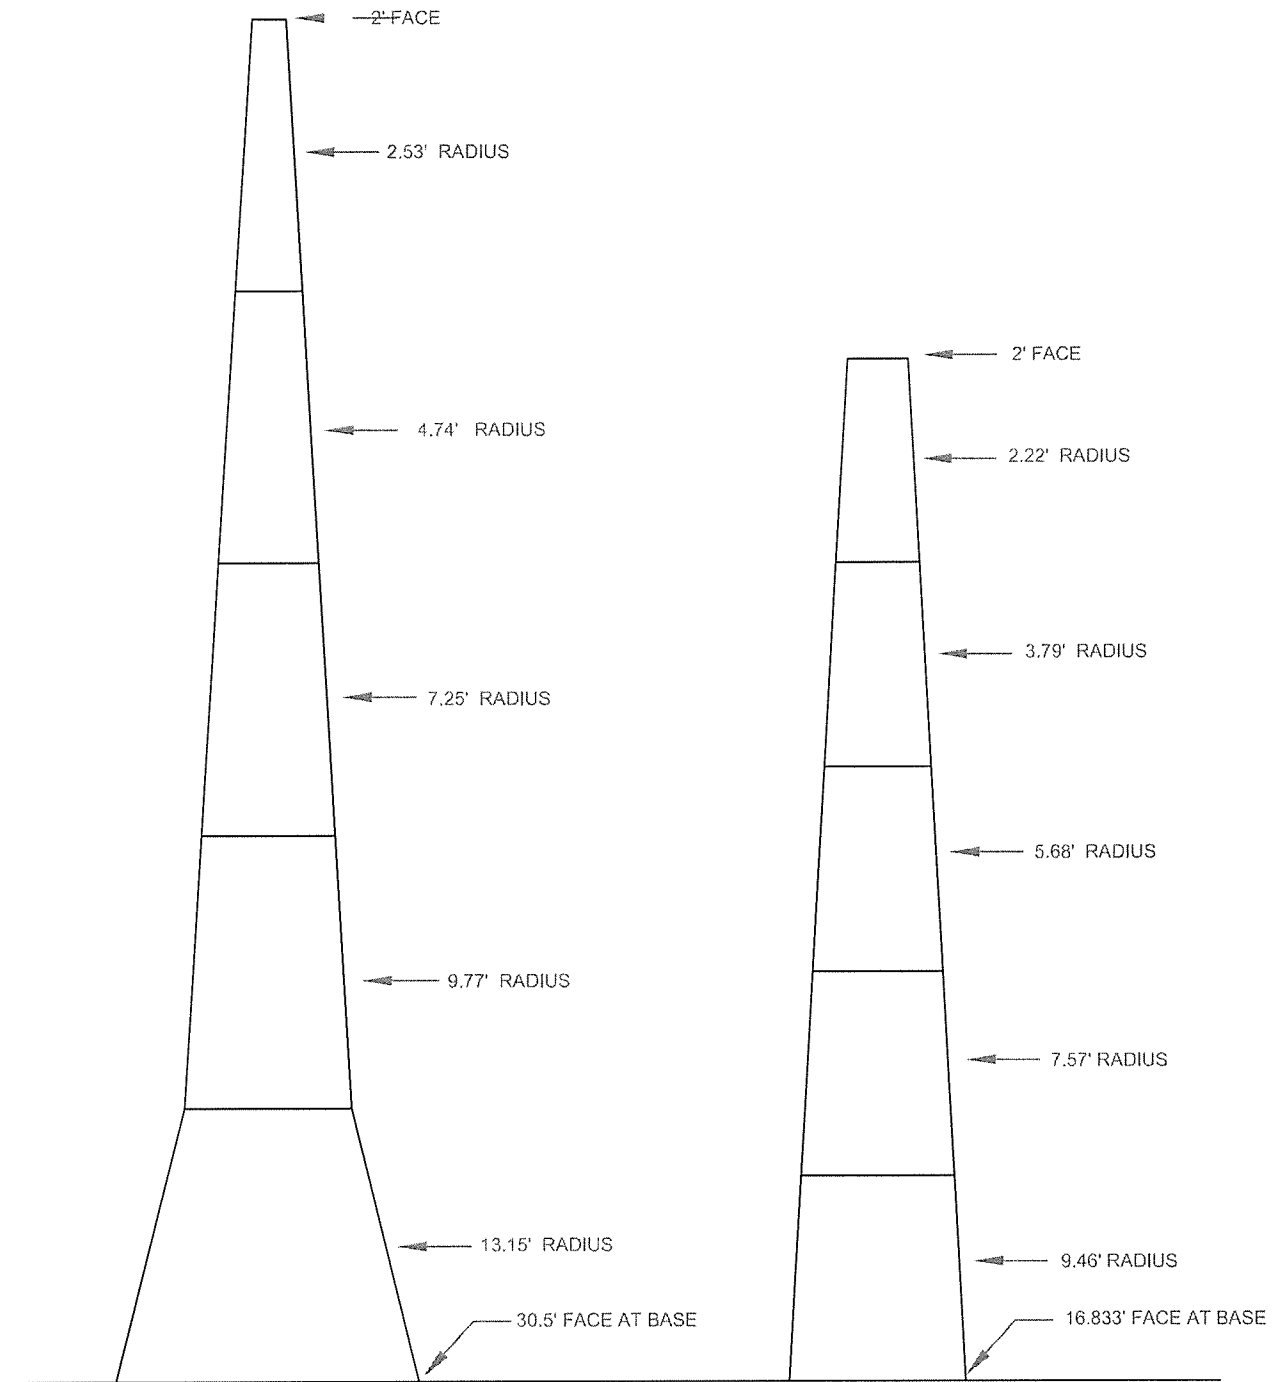

SOUTH TOWER
UNIFORM TAPER
ABOVE 40'
(5) 80' WIRES

NON-UNIFORM
TAPERS IN LOWEST
SECTION

NORTH TOWER
UNIFORM TAPER
(5) 60' WIRES

UNITED STATES OF AMERICA
FEDERAL COMMUNICATIONS COMMISSION

File No. BS-1993-A

Call Sign K T A R

Modification No.

MODIFICATION OF LICENSE

AM
(Class of station)

Phoenix Broadcasting, Inc.
c/o Station KTAR
515 N. 6th Street
St. Louis, MO 63101

Licensee: Phoenix Broadcasting, Inc.

Station location: Phoenix, AR

Associated Broadcast Station: K T A R

The Authority Contained in Authorization File No. BR-800602WE dated 11-17-90
granted to the Licensee listed above is hereby modified in part as follows:

The monitor point location for 207° bearing has been changed to reflect the following:

Direction of 207° True North. Exit Tower Plaza to 36th Street. Turn left (South) onto 36th Street from the Tower Plaza parking lot. Proceed west on McDowell Road to 24th Street. Turn left (South) onto 24th Street. Proceed south on 24th Street to Mohave Street. Turn right (west) onto Mohave Street. The proposed monitor point is located 640 feet from the intersection of 24th Street and Mohave. **The field intensity measured at this point should not exceed 355 mV/m.**

This modification of license shall be attached to and be made a part of the license of this station.

Except as herein expressly modified, the above-mentioned license, subject to all modifications heretofore granted by the Commission, is to continue in full force and effect in accordance with the terms and conditions thereof and for the period therein specified.

Dated: September 14, 1993

FEDERAL
COMMUNICATIONS
COMMISSION



JDS:yl

F.C.C. - WASHINGTON, D. C.

FCC Form 359
February 1990

UNITED STATES OF AMERICA
FEDERAL COMMUNICATIONS COMMISSION

File No.: BR-800602WE

MODIFIED
STANDARD BROADCAST STATION LICENSE

Call Sign: K T A R

Subject to the provisions of the Communications Act of 1934, subsequent Acts, and Treaties, and Commission Rules made thereunder, and further subject to conditions set forth in this license, by the LICENSEE

PHOENIX BROADCASTING, INC.

is hereby authorized to use and operate the radio transmitting apparatus hereinafter described for the purpose of broadcasting for the term ending 3 a.m. Local Time: OCTOBER 1, 1983

The licensee shall use and operate said apparatus only in accordance with the following terms:

- 1. On a frequency of 620 kHz.
- 2. With nominal power of 5 kilo watts nighttime and 5 kilo watts daytime,
with antenna input power of 5.4 kilowatts --- directional COMMON POINT current 10.2 amperes
antenna nighttime COMMON POINT resistance 52 ohms,
and antenna input power of 5 kilo watts non directional ANTENNA current 11.7 amperes
antenna daytime ANTENNA resistance 36.5 ohms

- 3. Hours of operation: UNLIMITED:
Average hours of sunrise and sunset:
Jan. 7:30am to 5:45pm; Feb. 7:15am to 6:15pm;
Mar. 6:45am to 6:30pm; Apr. 6:00am to 7:00pm;
May 5:30am to 7:15pm; June 5:15am to 7:45pm;
July 5:30am to 7:45pm; Aug. 5:45am to 7:15pm;
Sep. 6:15am to 6:30pm; Oct. 6:30am to 6:00pm;
Nov. 7:00am to 5:30pm; Dec. 7:30am to 5:15pm;

MOUNTAIN STANDARD TIME (NON-ADVANCED)

- 4. With the station located at: PHOENIX, ARIZONA
- 5. With the main studio located at: 301 West Osborn Rd.,
Phoenix, Arizona
- 6. Remote control point: 301 West Osborn Rd.,
Phoenix, Arizona
- 7. Transmitter location: 3659 Thomas Road,
Phoenix, Arizona

North Latitude: 33 ° 28 ' 44 "
West Longitude: 112 ° 00 ' 06 "

8. Obstruction marking specifications in accordance with the following paragraphs of FCC Form 715: 1, 3, 12 & 21.

9. Transmitter(s): TYPE ACCEPTED

10. Conditions: ----

The Commission reserves the right during said license period of terminating this license or making effective any changes or modification of this license which may be necessary to comply with any decision of the Commission rendered as a result of any hearing held under the rules of the Commission prior to the commencement of this license period or any decision rendered as a result of any such hearing which has been designated but not held, prior to the commencement of this license period.

This license is issued on the licensee's representation that the statements contained in licensee's application are true and that the undertakings therein contained so far as they are consistent herewith, will be carried out in good faith. The licensee shall, during the term of this license, render such broadcasting service as will serve public interest, convenience, or necessity to the full extent of the privileges herein conferred.

This license shall not vest in the licensee any right to operate the station nor any right in the use of the frequency designated in the license beyond the term hereof, nor in any other manner than authorized herein. Neither the license nor the right granted hereunder shall be assigned or otherwise transferred in violation of the Communications Act of 1934. This license is subject to the right of use or control by the Government of the United States conferred by Section 606 of the Communications Act of 1934.

This license consists of this page and pages

FEDERAL
COMMUNICATIONS
COMMISSION



Dated: November 17, 1980

cjb

File No.: BR-800602WE

Call Sign: K T A R

Date: 11-17-80

1. DESCRIPTION OF DIRECTIONAL ANTENNA SYSTEM

DA-

No. and Type of Elements: Two (2) tapered, self supporting, series excited vertical

Height above Insulators: #1 (S) - 400' (90.7°) #2 (N) - 300' (68°)

Overall Height: " 404' " 304'

Spacing and Orientation: Spaced 793' (180°) on a line bearing 27° True.

Non-Directional Antenna: #1 (S) tower with #2 (N) tower floating

Ground System consists of 240 equally spaced, buried copper radials about each tower alternately 200' and 400' in length. Radials between towers terminate midway on a 4" copper strap. #2(N) tower has a 48' x 48' ground screen and the #1 (S) tower has a 96' ground screen.

| | <u>#1(S)</u> | <u>#2(N)</u> |
|-------------------------------|--------------|--------------|
| 2. THEORETICAL SPECIFICATIONS | | |
| Phasing: | 0° | +82° |
| Field Ratio: | 1.0 | 0.55 |
| 3. OPERATING SPECIFICATIONS | | |
| Phase Indication*: | 0° | 76° |
| Antenna Base Current Ratio: | 1.00 | 1.00 |
| Current Ratio: | 1.00 | 1.00 |

*As indicated by Potomac Instruments AM-19(204) antenna monitor.

Field intensity measuring equipment shall be available at all times and the field intensity at each of the monitoring points shall be measured at least once every thirty days and an appropriate record kept of all measurements so made.

DESCRIPTION OF AND FIELD INTENSITY AT MONITORING POINTS:

Direction of 84° true North. From the transmitter, proceed east 3.25 miles on Thomas Road to N 61st Place. Turn left onto N. 61st Place. The measuring point is located 200 feet north of Thomas Road and 75 feet West of N. 61st Place. The field intensity measured at this point should not exceed 47.7 mv/m.

Direction of 207° true North. From the transmitter, proceed south 1.0 mile on 36th Street to McDowell Road. Turn right onto McDowell and proceed west 0.5 mile. Turn south onto 32nd Street and proceed 0.3 mile to East Moreland Street. The measuring point is located on the sidewalk north of 3138 E. Moreland Street. The field intensity measured at this point should not exceed 325 mv/m.

Direction of 329° true North. From the transmitter, proceed west on Thomas Road for 0.5 miles. Turn north onto 32nd Street, and proceed 1.2 miles to Glenrosa Avenue. Turn left onto Glenrosa Avenue and proceed 0.1 mile. Turn north onto 31st Place and proceed 0.05 miles. Turn left onto Glenrosa Avenue and proceed 0.1 mile. Turn left onto 31st Street. Proceed south to Heatherbras Street and turn west to 3030 East Heatherbras. The field intensity measured at this point should not exceed 95 mv/m.

DURING OPERATION BY REMOTE CONTROL:

Remote indications of antenna base current for each tower, and common point current shall be read and entered in the operating log at least once each half-hour. The indications at the transmitter, of the common point current, base currents, phase monitor sample loop currents and phase indications shall be read and entered in the operating log once each day. These readings must be made within two hours after the commencement of operation with the directional antenna by remote control.

SECTION III - LICENSE APPLICATION ENGINEERING DATA

Name of Applicant
 BONNEVILLE INTERNATIONAL CORPORATION

PURPOSE OF AUTHORIZATION APPLIED FOR: (check one)

- Station License Direct Measurement of Power

| | | | | | |
|---|---|-----------------|--|--------------------|---------|
| 1. Facilities authorized in construction permit | | | | | |
| Call Sign | File No. of Construction Permit (if applicable) | Frequency (kHz) | Hours of Operation | Power in kilowatts | |
| KTAR | NOT APPLICABLE | 620 | UNLIMITED | Night 5.0 | Day 5.0 |
| 2. Station location | | | | | |
| State Arizona | | | City or Town Phoenix | | |
| 3. Transmitter location | | | | | |
| State | County | City or Town | Street address (or other identification) | | |
| AZ | Maricopa | Phoenix | 3659 Thomas Rd. | | |
| 4. Main studio location | | | | | |
| State | County | City or Town | Street address (or other identification) | | |
| AZ | Maricopa | Phoenix | 7740 N. 16th Suite 200 | | |
| 5. Remote control point location (specify only if authorized directional antenna) | | | | | |
| State | County | City or Town | Street address (or other identification) | | |
| AZ | Maricopa | Phoenix | 7740 N. 16th Suite 200 | | |

6. Has type-approved stereo generating equipment been installed? Yes No
7. Does the sampling system meet the requirements of 47 C.F.R. Section 73.68? Yes No
- Not Applicable

Attach as an Exhibit a detailed description of the sampling system as installed.

| |
|--------------------------|
| Exhibit No. Eng. Rpt. |
|--------------------------|

| | | | | | | |
|---|---|----------|---|----------|-----------------------|----------|
| 8. Operating constants: | | | | | | |
| RF common point or antenna current (in amperes) without modulation for night system | | | RF common point or antenna current (in amperes) without modulation for day system | | | |
| 10.39 | | | 10.0 | | | |
| Measured antenna or common point resistance (in ohms) at operating frequency | | | Measured antenna or common point reactance (in ohms) at operating frequency | | | |
| Night | Day | | Night | Day | | |
| 50 | | +/- j0 | 50 | | +/- j0 | |
| Antenna indications for directional operation | | | | | | |
| Towers | Antenna monitor Phase reading(s) in degrees | | Antenna monitor sample current ratio(s) | | Antenna base currents | |
| | Night | Day | Night | Day | Night | Day |
| 1 (S) | 0 | does not | 1.0 | does not | not | does not |
| 2 (N) | 70.8 | apply | 0.828 | apply | required | apply |
| | | | | | | |
| Manufacturer and type of antenna monitor: Potomac Instruments AM-1901 | | | | | | |

SECTION III - Page 2

9. Description of antenna system ((f directional antenna is used, the information requested below should be given for each element of the array. Use separate sheets if necessary.)

| | | | | |
|--|--|---|---|--|
| Type Radiator two tapered self supporting series excited vertical towers | Overall height in meters of radiator above base insulator, or above base, if grounded. see below | Overall height in meters above ground (without obstruction lighting) see below | Overall height in meters above ground (include obstruction lighting) see below | If antenna is either top loaded or sectionalized, describe fully in an Exhibit. Exhibit No. dna |
|--|--|---|---|--|

Excitation Series Shunt

Geographic coordinates to nearest second. For directional antenna give coordinates of center of array. For single vertical radiator give tower location.

| | | | | | | | |
|----------------|-----------------|-----|-----|----------------|------------------|-----|-----|
| North Latitude | 33 ^o | 28' | 44" | West Longitude | 112 ^o | 00' | 06" |
|----------------|-----------------|-----|-----|----------------|------------------|-----|-----|

If not fully described above, attach as an Exhibit further details and dimensions including any other antenna mounted on tower and associated isolation circuits.

Exhibit No.
dna

Also, if necessary for a complete description, attach as an Exhibit a sketch of the details and dimensions of ground system.

Exhibit No.
no change


10. In what respect, if any, does the apparatus constructed differ from that described in the application for construction permit or in the permit?

Tower #1 Reg. 1001096 121.9 M radiator ht., 123.1 M overall ht with and without lights
Tower #2 Reg. 1001095 91.44 M radiator ht., 92,7 M overall ht with and without lights

11. Give reasons for the change in antenna or common point resistance.

No change Day current read at same location as night common point current per 73.54 (a)

I certify that I represent the applicant in the capacity indicated below and that I have examined the foregoing statement of technical information and that it is true to the best of my knowledge and belief.
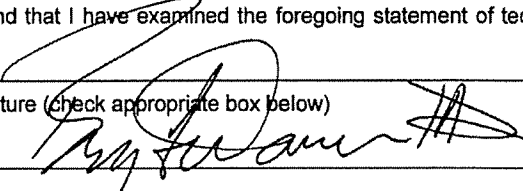
| | |
|--|---|
| Name (Please Print or Type) Benj. F. Dawson III, P.E. | Signature (Check appropriate box below)  |
| Address (include ZIP Code) Hatfield & Dawson Consulting Engineers 9500 Greenwood Avenue North Seattle, WA 98103 USA | Date July 12, 2013 |
| | Telephone No. (Include Area Code) 206 783 9151 |

Technical Director

Registered Professional Engineer

Chief Operator

Technical Consultant

Other (specify) Consulting Engineer