

20110415ABP

Alisa R. Lahey
202-230-5168
alisa.lahey@dbt.com

RECEIVED JUL 27 A 5:32
AUDIO SERVICES DIVISION

Law Offices

1500 K Street, N.W.
Washington, DC
20005-1209

202-842-8800 phone
202-842-8465 fax
www.drinkerbiddle.com

CALIFORNIA
DELAWARE
ILLINOIS
NEW JERSEY
NEW YORK
PENNSYLVANIA
WASHINGTON DC
WISCONSIN

July 25, 2011

Via Hand Delivery

FILED/ACCEPTED

JUL 25 2011

ORIGINAL

Ms. Marlene H. Dortch
Secretary
Federal Communications Commission
The Portals, Room TW-A325
445 12th Street, SW
Washington, D.C. 20554

Federal Communications Commission
Office of the Secretary


**Re: CCR-Great Falls IV, LLC
KMON(AM), Great Falls, MT, Facility No. 62330
Amendment to BMML-20110415ABP**

Dear Ms. Dortch:

On behalf of CCR-Great Falls IV, LLC, the licensee of AM broadcast station KMON, Great Falls, Montana, this is to amend the above-referenced, pending application in response to correspondence with the FCC staff.

Please contact Howard Liberman of this firm at 202-842-8876 or me with any questions.

Sincerely,

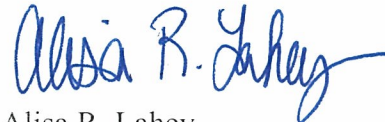

Alisa R. Lahey

cc: Ann Gallagher, Audio Division, Media Bureau (via e-mail)

FOR
FCC
USE
ONLY

FCC 302-AM
APPLICATION FOR AM
BROADCAST STATION LICENSE

(Please read instructions before filling out form.)

FOR COMMISSION USE ONLY

FILE NO.

SECTION I - APPLICANT FEE INFORMATION

1. PAYOR NAME (Last, First, Middle Initial)

CCR-Great Falls IV, LLC

FILED/ACCEPTED

MAILING ADDRESS (Line 1) (Maximum 35 characters)

501 South Cherry Street, Suite 480

JUL 25 2011

MAILING ADDRESS (Line 2) (Maximum 35 characters)

Federal Communications Commission
Office of the Secretary

CITY

Denver

STATE OR COUNTRY (if foreign address)

CO

ZIP CODE

80246

TELEPHONE NUMBER (include area code)

(303)468-6500

CALL LETTERS

KMON

OTHER FCC IDENTIFIER (If applicable)

62330

2. A. Is a fee submitted with this application?

☐

Yes

☒

No

B. If No, indicate reason for fee exemption (see 47 C.F.R. Section

☐

Governmental Entity

☐

Noncommercial educational licensee

☒

Other (Please explain):

C. If Yes, provide the following information:

Enter in Column (A) the correct Fee Type Code for the service you are applying for. Fee Type Codes may be found in the "Mass Media Services Fee Filing Guide." Column (B) lists the Fee Multiple applicable for this application. Enter fee amount due in Column (C).

(A)

| FEE TYPE CODE | | |
|---------------|--|--|
| | | |

(B)

| FEE MULTIPLE | | | |
|--------------|---|---|---|
| 0 | 0 | 0 | 1 |

(C)

| FEE DUE FOR FEE TYPE CODE IN COLUMN (A) |
|---|
| \$ AMENDMENT |

FOR FCC USE ONLY

To be used only when you are requesting concurrent actions which result in a requirement to list more than one Fee Type Code.

(A)

| | | |
|--|--|--|
| | | |
|--|--|--|

(B)

| | | | |
|---|---|---|---|
| 0 | 0 | 0 | 1 |
|---|---|---|---|

(C)

| |
|----|
| \$ |
|----|

FOR FCC USE ONLY

ADD ALL AMOUNTS SHOWN IN COLUMN C, AND ENTER THE TOTAL HERE. THIS AMOUNT SHOULD EQUAL YOUR ENCLOSED REMITTANCE.

TOTAL AMOUNT REMITTED WITH THIS APPLICATION

\$

FOR FCC USE ONLY

| | | |
|---|-------------|-------------------|
| SECTION II - APPLICANT INFORMATION | | |
| 1. NAME OF APPLICANT CCR-Great Falls IV, LLC | | |
| MAILING ADDRESS 501 South Cherry Street, Suite 480 | | |
| CITY Denver | STATE CO | ZIP CODE 80246 |

2. This application is for:

- ☒ Commercial
 ☐ Noncommercial
☒ AM Directional
 ☐ AM Non-Directional

| | | | | |
|----------------------|---|-------------------------------------|--|--|
| Call letters KMON | Community of License Great Falls, MT | Construction Permit File No. N/A | Modification of Construction Permit File No(s). N/A | Expiration Date of Last Construction Permit N/A |
|----------------------|---|-------------------------------------|--|--|

3. Is the station now operating pursuant to automatic program test authority in accordance with 47 C.F.R. Section 73.1620?

☐ Yes ☐ No

If No, explain in an Exhibit.

Exhibit No.
N/A

4. Have all the terms, conditions, and obligations set forth in the above described construction permit been fully met?

☐ Yes ☐ No

If No, state exceptions in an Exhibit.

Exhibit No.
N/A

5. Apart from the changes already reported, has any cause or circumstance arisen since the grant of the underlying construction permit which would result in any statement or representation contained in the construction permit application to be now incorrect?

☐ Yes ☐ No

If Yes, explain in an Exhibit.

Exhibit No.
N/A

6. Has the permittee filed its Ownership Report (FCC Form 323) or ownership certification in accordance with 47 C.F.R. Section 73.3615(b)?

☐ Yes ☐ No

☒ Does not apply

If No, explain in an Exhibit.

Exhibit No.
N/A

7. Has an adverse finding been made or an adverse final action been taken by any court or administrative body with respect to the applicant or parties to the application in a civil or criminal proceeding, brought under the provisions of any law relating to the following: any felony; mass media related antitrust or unfair competition; fraudulent statements to another governmental unit; or discrimination?

☐ Yes ☒ No

If the answer is Yes, attach as an Exhibit a full disclosure of the persons and matters involved, including an identification of the court or administrative body and the proceeding (by dates and file numbers), and the disposition of the litigation. Where the requisite information has been earlier disclosed in connection with another application or as required by 47 U.S.C. Section 1.65(c), the applicant need only provide: (i) an identification of that previous submission by reference to the file number in the case of an application, the call letters of the station regarding which the application or Section 1.65 information was filed, and the date of filing; and (ii) the disposition of the previously reported matter.

Exhibit No.

8. Does the applicant, or any party to the application, have a petition on file to migrate to the expanded band (1605-1705 kHz) or a permit or license either in the existing band or expanded band that is held in combination (pursuant to the 5 year holding period allowed) with the AM facility proposed to be modified herein?

☐ Yes ☒ No

If Yes, provide particulars as an Exhibit.

Exhibit No.

The APPLICANT hereby waives any claim to the use of any particular frequency or of the electromagnetic spectrum as against the regulatory power of the United States because use of the same, whether by license or otherwise, and requests and authorization in accordance with this application. (See Section 304 of the Communications Act of 1934, as amended).


The APPLICANT acknowledges that all the statements made in this application and attached exhibits are considered material representations and that all the exhibits are a material part hereof and are incorporated herein as set out in full in

CERTIFICATION

1. By checking Yes, the applicant certifies, that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. Section 862, or, in the case of a non-individual applicant (e.g., corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits that includes FCC benefits pursuant to that section. For the definition of a "party" for these purposes, see 47 C.F.R. Section 1.2002(b).

☒ Yes ☐ No

2. I certify that the statements in this application are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.
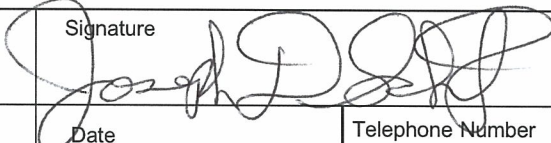
| | | |
|-----------------------------------|---|--|
| Name <i>Joseph D. Schwartz</i> | Signature  | |
| Title Joseph Schwartz | Date <i>7/22/2011</i> | Telephone Number (303)468-6500 |

WILLFUL FALSE STATEMENTS ON THIS FORM ARE PUNISHABLE BY FINE AND/OR IMPRISONMENT (U.S. CODE, TITLE 18, SECTION 1001), AND/OR REVOCATION OF ANY STATION LICENSE OR CONSTRUCTION

FCC NOTICE TO INDIVIDUALS REQUIRED BY THE PRIVACY ACT AND THE PAPERWORK REDUCTION ACT

The solicitation of personal information requested in this application is authorized by the Communications Act of 1934, as amended. The Commission will use the information provided in this form to determine whether grant of the application is in the public interest. In reaching that determination, or for law enforcement purposes, it may become necessary to refer personal information contained in this form to another government agency. In addition, all information provided in this form will be available for public inspection. If information requested on the form is not provided, the application may be returned without action having been taken upon it or its processing may be delayed while a request is made to provide the missing information. Your response is required to obtain the requested authorization.

Public reporting burden for this collection of information is estimated to average 639 hours and 53 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, can be sent to the Federal Communications Commission, Records Management Branch, Paperwork Reduction Project (3060-0627), Washington, D. C. 20554. Do NOT send completed forms to this address.

THE FOREGOING NOTICE IS REQUIRED BY THE PRIVACY ACT OF 1974, P.L. 93-579, DECEMBER 31, 1974, 5 U.S.C. 552a(e)(3), AND THE PAPERWORK REDUCTION ACT OF 1980, P.L. 96-511, DECEMBER 11, 1980, 44 U.S.C. 3507.

SECTION III - LICENSE APPLICATION ENGINEERING DATA

Name of Applicant

CCR - Great Falls IV, LLC

PURPOSE OF AUTHORIZATION APPLIED FOR: (check one)



Station License



Direct Measurement of Power

1. Facilities authorized in construction permit

| Call Sign | File No. of Construction Permit (if applicable) | Frequency (kHz) | Hours of Operation | Power in kilowatts | |
|-----------|--|--------------------|--------------------|--------------------|-----|
| | | | | Night | Day |
| KMON | N/A | 560 | Unlimited | 5.0 | 5.0 |

2. Station location

| | |
|------------------|-----------------------------|
| State Montana | City or Town Great Falls |
|------------------|-----------------------------|

3. Transmitter location

| | | | |
|-------------|-------------------|-----------------------------|---|
| State MT | County Cascade | City or Town Great Falls | Street address (or other identification) 6 miles south of Great Falls |
|-------------|-------------------|-----------------------------|---|

4. Main studio location

| | | | |
|-------------|-------------------|-----------------------------|--|
| State MT | County Cascade | City or Town Great Falls | Street address (or other identification) 20 Third Street North |
|-------------|-------------------|-----------------------------|--|

5. Remote control point location (specify only if authorized directional antenna)

| | | | |
|-------------|-------------------|-----------------------------|--|
| State MT | County Cascade | City or Town Great Falls | Street address (or other identification) 20 Third Street North |
|-------------|-------------------|-----------------------------|--|

6. Has type-approved stereo generating equipment been installed?



Yes



No

7. Does the sampling system meet the requirements of 47 C.F.R. Section 73.68?



Yes



No



Not Applicable

Attach as an Exhibit a detailed description of the sampling system as installed.

Exhibit No.
See Engineering**8. Operating constants:**

| | |
|---|--|
| RF common point or antenna current (in amperes) without modulation for night system 10.0 | RF common point or antenna current (in amperes) without modulation for day system 11.0 |
| Measured antenna or common point resistance (in ohms) at operating frequency Night 54 Day 41.5 | Measured antenna or common point reactance (in ohms) at operating frequency Night J0 Day +J76 |

Antenna indications for directional operation

| Towers | Antenna monitor Phase reading(s) in degrees | | Antenna monitor sample current ratio(s) | | Antenna base currents | |
|--------|--|-----|--|-----|-----------------------|-----|
| | Night | Day | Night | Day | Night | Day |
| 1 (N) | -127.1 | --- | 0.479 | --- | --- | --- |
| 2 (C) | 0 | --- | 1.000 | --- | --- | --- |
| 3 (S) | +125.4 | --- | 0.569 | --- | --- | --- |
| | | | | | | |
| | | | | | | |

Manufacturer and type of antenna monitor:

Potomac Instruments AM-19 (204)

SECTION III - Page 2

9. Description of antenna system ((f directional antenna is used, the information requested below should be given for each element of the array. Use separate sheets if necessary.)

| Type Radiator | Overall height in meters of radiator above base insulator, or above base, if grounded. | Overall height in meters above ground (without obstruction lighting) | Overall height in meters above ground (include obstruction lighting) | If antenna is either top loaded or sectionalized, describe fully in an Exhibit. |
|-------------------------|--|--|--|---|
| Uniform cross - section | 134.1 | 135.0 | 135.6 | Exhibit No. N/A |

Excitation ☒ Series ☐ Shunt

Geographic coordinates to nearest second. For directional antenna give coordinates of center of array. For single vertical radiator give tower location.

| | |
|-------------------------------|--------------------------------|
| North Latitude 47 ° 25 ' 29 " | West Longitude 111 ° 17 ' 20 " |
|-------------------------------|--------------------------------|

If not fully described above, attach as an Exhibit further details and dimensions including any other antenna mounted on tower and associated isolation circuits.

Exhibit No.
N/A

Also, if necessary for a complete description, attach as an Exhibit a sketch of the details and dimensions of ground system.

Exhibit No.


10. In what respect, if any, does the apparatus constructed differ from that described in the application for construction permit or in the permit?

N/A

11. Give reasons for the change in antenna or common point resistance.

N/A

I certify that I represent the applicant in the capacity indicated below and that I have examined the foregoing statement of technical information and that it is true to the best of my knowledge and belief.
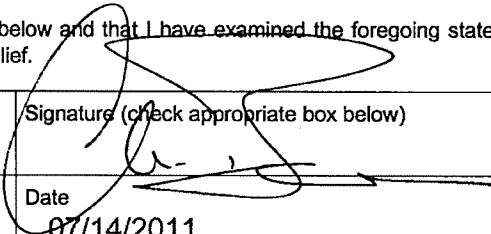
| | |
|--|---|
| Name (Please Print or Type) Clarence M. Beverage | Signature (check appropriate box below)  |
| Address (include ZIP Code) Communications Technologies, Inc. P. O. Box 1130 Marlton, NJ 08053 | Date 07/14/2011 Telephone No. (Include Area Code) 856-985-0077 |

- | | |
|--|---|
| <input type="checkbox"/> Technical Director | <input type="checkbox"/> Registered Professional Engineer |
| <input type="checkbox"/> Chief Operator | <input type="checkbox"/> Technical Consultant |
| <input checked="" type="checkbox"/> Other (specify) Broadcast Engineering Consultant | |

**ENGINEERING STATEMENT IN
SUPPORT OF 302-AM
APPLICATION FOR LICENSE EMPLOYING MOMENT
METHOD MODELING
KMON 560 kHz
5 kW DA-N U
GREAT FALLS, MONTANA**

APRIL 2011 (REVISED JULY 14, 2011)

**ENGINEERING STATEMENT IN
SUPPORT OF 302-AM
APPLICATION FOR LICENSE
EMPLOYING MOMENT METHOD MODELING
KMON 560 kHz
5 kW DA-N U
GREAT FALLS, MONTANA**

APRIL 2011 (REVISED JULY 14, 2011)

TABLE OF CONTENTS

ENGINEERING STATEMENT

FORMS: FCC FORM 302-AM, SECTION III

EXHIBITS:

- I. MoM detail for towers driven individually.
- II. Derivation of nighttime operating parameters.

- FIGURES:**
- 1. Circuit Model for Tower #1 Base – other towers floating.
 - 2. Circuit Model for Tower #2 Base – other towers floating.
 - 3. Circuit Model for Tower #3 Base – other towers floating.
 - 4. Circuit Model for Tower #1 Base – DA-N.
 - 5. Circuit Model for Tower #2 Base – DA-N
 - 6. Circuit Model for Tower #3 Base – DA-N.
(Figures 1-6 Revised 07142011)

- APPENDIX:**
- 1. Reference Field Strength Measurements
(Revised 07142011)

**ENGINEERING STATEMENT IN
SUPPORT OF 302-AM
APPLICATION FOR LICENSE
EMPLOYING MOMENT METHOD MODELING
KMON 560 kHz
5 kW DA-N U
GREAT FALLS, MONTANA
APRIL 2011 (REVISED JULY 14, 2011)**

SUMMARY

The following engineering statement has been prepared on behalf of **CCR – Great Falls IV, LLC**, licensee of standard broadcast station KMON, FCC ID 62330, 560 kHz, Great Falls, Montana. KMON is currently licensed under BZ-20041029AJR which authorizes 560 kHz daytime non directional operation at a power of 5 kW and 5 kW nighttime directional operation. This application requests licensing of the KMON antenna system using computer modeling and sample system verification as provided for in the Second Report and Order in MM Docket No. 93-177 released September 26, 2008. The rules specify that the night directional antenna parameters be set to the operating parameters determined by the moment method without deviation. That operation has been completed and Form 302-AM is submitted herein specifying the as adjusted operating parameters.

It is noted that the application material specified in the above paragraph was filed with the FCC on April 15, 2011 and assigned file number BMML-20110415ABP. By letter dated June 24, 2011 the Audio Division requested that the applicant correct certain deficiencies. This filing is complete with the material originally filed as well as the following changes in response to the FCC letter:

1. Appendix 1 has been supplemented with reference field strength measurement data on the 28.5 degree, major lobe, radial.
2. The current used in the circuit analysis was increased from 1.0 ampere to 10.0 amperes to for greater resolution. Base circuit tabulations are complete and reflect the higher applied current.
3. The sample lines have been swept in 1 kHz steps for better resolution to allow the characteristic impedance to be calculated 1/8 wave above and below the open circuit resonant frequency closest to carrier rather than at the second resonant frequency originally employed.
4. The frequency used to measure sample line impedance with toroid sampling devices connected has been specified.

METHOD OF MOMENTS MODEL – SELF IMPEDANCE ANALYSIS

In an effort to model the antenna system as accurately as possible, detailed mechanical data was obtained from the licensee and is summarized below:

Each tower is 440' (134.1 meters) in height, steel, uniform cross section, 24" face mounted on a square concrete base pier with 4" strap in an X configuration. Each tower has lightning dissipation panels at the top.

Base Insulators are brown ceramic 14" in height; specified capacitance of 30 pf.

Three wire tower lightning chokes are employed at each tower.

None of the towers support an antenna or transmission line.

Tower #1 (N) is 32" from feed through bowl with a 2 turn lightning dissipation choke 8" in diameter. Tower #2 (C) is 51" from the feed through bowl with a 1 turn 11" diameter lightning dissipation choke. Tower #3 (S) is 45" from the feed through bowl with a 2 turn 8" diameter choke.

The choice of calculating engine and software implementation chosen for this filing is the ACS Model Version 1.015 employing MININEC3. The circuit analysis software employed is WCAP Professional Version 1.1.02.

The wire models for the three towers are constructed as specified below:

Tower #1 North

0.2911 meters

Percentage of actual radius = 100%

Z = 138.3 meters

Percentage of actual height = 103.1%

Number of segments = 20

Tower #2 Center

0.2911 meters

Percentage of actual radius = 100%

Z = 138.3 meters

Percentage of actual height = 103.1%

Number of segments = 20

Tower #3 South

0.2474 meters

Percentage of actual radius = 85.0%

Z = 136.8 meters

Percentage of actual height = 102.0%

Number of segments = 20

The above variations comply with the 73.151 requirement that the radii of the wire model cylinder be within 80 and 150 percent of the radius of a circle with a circumference equal to the sum of the faces, that the height be between 75 and 125 percent of the physical length and that no segment be less than 10 electrical degrees.

The tower measured base self impedances, with all other towers floating, as measured at the J plug, are listed below. Tower impedance was obtained using a Delta OIB-3, serial number 1369 fed by the transmitter. The modeled self impedance measurements, with all other towers floating, may be found in Exhibit I, page 3 for Tower #1, page 7 for Tower #2 and page 11 for Tower #3. A circuit model has been constructed for each tower to account for shunt and series reactance across the tower base. All calculations have been made employing WCAP Professional version 1.1.02 as seen in Figures 1 – 3 for self impedance and Figures 4 – 6 for nighttime directional operation. The measured and calculated self impedance values are well within the tolerance specified in 73.151(c)(2)(ii) as seen below:

~ 4 ~

Tower #1

| | |
|---------------------------------|--------------------|
| Measured self impedance at ATU: | 43.0 +J 70 |
| Modeled self impedance at base: | 45.469 +J 39.541 |
| Shunt capacitance: | 30 pf |
| Series inductance: | +J 30.57, 8.72 uh |
| Shunt reactance: | +J 19,000, 5400 uh |
| Modeled self impedance at ATU: | 45.51 +J 70.0 |

Tower #2

| | |
|---------------------------------|--------------------|
| Measured self impedance at ATU: | 40.0 +J 73 |
| Modeled self impedance at base: | 43.449 +J 38.939 |
| Shunt capacitance: | 30 pf |
| Series inductance: | +J 34.14, 9.74 uh |
| Shunt reactance: | +J 19,000, 5400 uh |
| Modeled self impedance at ATU: | 43.47 +J 73.0 |

Tower #3

| | |
|---------------------------------|--------------------|
| Measured self impedance at ATU: | 40.0 +J 72 |
| Modeled self impedance at base: | 43.585 +J 33.84 |
| Shunt capacitance: | 30 pf |
| Series inductance: | +J 35.06, 10.0 uh |
| Shunt reactance: | +J 19,000, 5400 uh |
| Modeled self impedance at ATU: | 43.58 +J 68.8 |

The calculated tolerances are:

Tower #1 43 +/- 3.72 resistance, 70 +/- 4.8 reactance
Tower #2 40 +/- 3.6 resistance, 73 +/- 4.92 reactance
Tower #3 40 +/- 3.6 resistance, 72 +/- 4.88 reactance

METHOD OF MOMENTS MODEL – BASE OPERATING PARAMETERS

The modeled tower array was employed, as constructed for the derivation of self impedance, for the determination of nighttime operating parameters. The FCC theoretical values were converted to base excitation values. The base excitation values for the nighttime array may be found in Exhibit II, page 3 and the base operating parameters on page 4.

The calculated base operating parameters and the phase monitor parameters as adjusted and reflected on Form 302-AM, attached, are as follows:

NIGHTTIME:

| <u>Tower</u> | <u>Figures 4 – 6 Circuit Model Ratio and Phase</u> | <u>Correction to Modeled Values to Derive Antenna Monitor Values</u> |
|--------------|--|--|
| #1 | 1.004 -0.106° | 1.004 -0.011 |
| #2 | 1.000 -0.095° | 1.000 0.00 |
| #3 | 0.998 -0.030° | 0.998 +0.065 |

| <u>Tower</u> | <u>MoM Modeled Current & Phase</u> | <u>Antenna Monitor Current & Phase</u> |
|--------------|--|--|
| #1 | 0.477 -127.1 | 0.479 -127.1 |
| #2 | 1.000 0.00 | 1.000 0.00 |
| #3 | 0.570 125.3 | 0.569 +125.4 |

The adjusted patterns have phase monitor values which are equal to the modeled phase and ratio corrected for circuit model amplitude and phase. The nighttime directional patterns have been adjusted to the values above and as shown on the attached form 302-AM.

DIRECT MEASUREMENT OF POWER

Common point impedance was measured with a Delta OIB-3, serial number 1369, placed at the Delta TCA-10/20 EXR common point ammeter. Common point current was measured with a Delta TCA 10/20 EXR permanently installed in the phasing cabinet with the toroidal sample immediately adjacent to the impedance bridge. Common point resistance was set to 54 +J0 and the transmitter power adjusted to yield the correct current for a power level of 5,400 watts as found on FCC Form 302-AM attached.

Tower #2 impedance, was taken at the J plug at the Delta TCA-20EX RF ammeter in the non directional mode with the other towers detuned. The Delta OIB-3 specified above was employed.

POST CONSTRUCTION CERTIFICATION OF ARRAY GEOMETRY

The array has been modeled using the best available data.

| | <u>ASR</u> | <u>Height Above Base Insulator</u> | <u>Height Overall AGL</u> |
|----------|------------|--|-------------------------------|
| Tower #1 | 1007214 | 134.1 meters | 135.6 |
| Tower #2 | 1007215 | 134.1 meters | 135.6 |
| Tower #3 | 1007216 | 134.1 meters | 135.6 |

As an existing licensed facility a surveyor's certification is not included as provided for in Public Notice FCC DA 09-2430 dated October 29, 2009.

SAMPLING SYSTEM

The antenna system is licensed with an approved sampling system and no changes to the sampling system were required for this filing.

Delta toroid sampling devices, type TCT-3, are mounted on open panels in weather proof buildings at the base of each tower. Sample lines are equal length Andrew LDF2-50. The antenna monitor is a Potomac Instruments AM-19 (204).

Measurements on the sampling system components are tabulated below. Toroidal sample devices were tested for accuracy by removing the units from the tuning units at the base of each of the three towers and placing the devices in series on the same conductor in the transmitter building. The sample devices were then measured when connected to the phase monitor with coax jumpers having exact equal electrical length:

| | <u>Ratio</u> | <u>Phase</u> |
|-----------|--------------|--------------|
| Toroid #1 | 100.0 | 0.0 |
| Toroid #2 | 100.0 | 0.0 |
| Toroid #3 | 101.0 | 0.0 |

The sampling device accuracy was verified as being well within the manufacturer tolerance of +/-2% in magnitude and +/-3 degrees in phase

Phase monitor accuracy was confirmed by feeding two tower inputs at a time through a splitter and equal length jumpers to confirm equal magnitude and phase on each tower. There were no observable errors.

Impedance and electrical length for each of the three sample lines were measured with an Array Solutions model AIM4170C vector network analyzer ("VNA"). The VNA was connected to the sample lines at the transmitter building with the sample lines unterminated on the turning unit end. The measured electrical length data is found below:

~ 7 ~

| | |
|---|--------------------------------------|
| Sample line open-circuited odd quarter wave below 560 kHz (0.25 wavelength) | 1(N) = 306 kHz 803.6' = 164.7 deg. |
| | 2(C) = 306.5 kHz 800.9' = 164.2 deg. |
| | 3(S) = 305.5 kHz 803.6' = 164.7 deg. |
| Sample line open-circuited odd quarter wave above 560 kHz (0.75 wavelength) | 1(N) = 928 kHz 794.9' = 162.9 deg. |
| | 2(C) = 932 kHz 791.5' = 162.2 deg. |
| | 3(S) = 926 kHz 796.6' = 163.2 deg. |

It may be seen that the sample lines are, for all practical purposes, equal in length to better than plus and minus 0.3 degrees at the lower frequency and 0.5 degrees at the higher frequency. The sample system meets the rule requirement that the sample lines be equal to within one degree.

The impedance of the sample lines was determined by measuring the open circuit impedance 45 degrees above and below the resonant length of the sample lines. The measured data is presented below. The impedance is determined using the formula:

$$Z_o = ((R_1^2 + X_1^2)^{1/2} \times (R_2^2 + X_2^2)^{1/2})^{1/2}$$

| | 7/8 lambda +45° From 925 kHz | Measured Impedance | 5/8 lambda -45° From 925 kHz | Measured Impedance | Calculated Impedance by formula |
|-------------|------------------------------------|-----------------------|------------------------------------|-----------------------|------------------------------------|
| Tower #1(N) | 459 | 6.71 +J50.52 | 153 | 1.19 -J51.76 | 51.37 |
| Tower #2(C) | 460.5 | 6.74 +J49.57 | 153.5 | 1.21 -J51.51 | 50.77 |
| Tower #3(S) | 459 | 6.67 +J50.39 | 153 | 1.20 -J51.6 | 51.22 |

The characteristic impedance of the transmission lines is within 1 ohm. The allowable tolerance is 2 ohms.

Sampling system impedance was measured with each of the three sampling lines terminated in its respective toroid sampling device. Impedance was measured by connecting each sample line directly to the VNA. The measured impedance data is found below as measured at 560 kHz.

Measured impedance of sampling line and associated toroid

| | |
|-------------|------------|
| Tower #1(N) | 48.5 +J1.0 |
| Tower #2(C) | 48.5 +J0.5 |
| Tower #3(S) | 49.0 +J1.3 |

REFERENCE FIELD STRENGTH MEASUREMENTS

Reference field strength measurements were taken by Kenneth Eklund, Director of Engineering for Cherry Creek Radio. The measurement data appears in Appendix 1. The field meter was checked against other meters of known calibration prior to the commencement of measurements.

CONCLUSION

All adjustments, measurements and field work were undertaken under the direction of the affiant.

The foregoing was prepared on behalf of **CCR - Great Falls IV, LLC** by Clarence M. Beverage of *Communications Technologies, Inc.*, Marlton, New Jersey, whose qualifications are a matter of record with the Federal Communications Commission. The statements herein are true and correct of his own knowledge, except such statements made on information and belief, and as to these statements he believes them to be true and correct.

/s/ Clarence M. Beverage
for Communications Technologies, Inc.
Marlton, New Jersey

July 14, 2011

EXHIBIT I

KMON TOWER #1 FED TOWERS 2 & 3 FLOATING

ACSModel

(MININEC 3.1 Core)

03-26-2011

15:47:03

KMON TOWER #1

Frequency = 0.560 MHz Wavelength = 535.35714 Meters

No. of Wires: 3

| Wire No. 1 | Coordinates | | | Radius | End Connection | No. of Segments |
|------------|-------------|----------|--------|--------|----------------|-----------------|
| X | Y | Z | | | | |
| 0 | 0 | 0 | | -1 | | |
| 0 | 0 | 138.3006 | 0.2911 | 0 | | 20 |
| Wire No. 2 | Coordinates | | | Radius | End Connection | No. of Segments |
| X | Y | Z | | | | |
| -117.6203 | -63.86259 | 0 | | -2 | | |
| -117.6203 | -63.86259 | 138.3006 | 0.2911 | 0 | | 20 |
| Wire No. 3 | Coordinates | | | Radius | End Connection | No. of Segments |
| X | Y | Z | | | | |
| -235.2405 | -127.7252 | 0 | | -3 | | |
| -235.2405 | -127.7252 | 136.8135 | 0.2474 | 0 | | 20 |

**** ANTENNA GEOMETRY ****

| Wire No. 1 | Coordinates | | | Radius | Connection Pulse | | |
|------------|-------------|----------|--------|--------|------------------|-----|--|
| X | Y | Z | | End1 | End2 | No. | |
| 0 | 0 | 0 | 0.2911 | -1 | 1 | 1 | |
| 0 | 0 | 6.91503 | 0.2911 | 1 | 1 | 2 | |
| 0 | 0 | 13.83006 | 0.2911 | 1 | 1 | 3 | |
| 0 | 0 | 20.74509 | 0.2911 | 1 | 1 | 4 | |
| 0 | 0 | 27.66012 | 0.2911 | 1 | 1 | 5 | |
| 0 | 0 | 34.57515 | 0.2911 | 1 | 1 | 6 | |
| 0 | 0 | 41.49018 | 0.2911 | 1 | 1 | 7 | |
| 0 | 0 | 48.40521 | 0.2911 | 1 | 1 | 8 | |
| 0 | 0 | 55.32024 | 0.2911 | 1 | 1 | 9 | |
| 0 | 0 | 62.23527 | 0.2911 | 1 | 1 | 10 | |
| 0 | 0 | 69.1503 | 0.2911 | 1 | 1 | 11 | |
| 0 | 0 | 76.06533 | 0.2911 | 1 | 1 | 12 | |
| 0 | 0 | 82.98036 | 0.2911 | 1 | 1 | 13 | |
| 0 | 0 | 89.89539 | 0.2911 | 1 | 1 | 14 | |
| 0 | 0 | 96.81042 | 0.2911 | 1 | 1 | 15 | |
| 0 | 0 | 103.7254 | 0.2911 | 1 | 1 | 16 | |
| 0 | 0 | 110.6405 | 0.2911 | 1 | 1 | 17 | |
| 0 | 0 | 117.5555 | 0.2911 | 1 | 1 | 18 | |
| 0 | 0 | 124.4705 | 0.2911 | 1 | 1 | 19 | |
| 0 | 0 | 131.3856 | 0.2911 | 1 | 0 | 20 | |

EXHIBIT I

KMON TOWER #1 FED TOWERS 2 & 3 FLOATING

| Wire No. | 2 | Coordinates | | | Connection | Pulse |
|-----------|-----------|-------------|--------|------|------------|-------|
| X | Y | Z | Radius | End1 | End2 | No. |
| -117.6203 | -63.86259 | 0 | 0.2911 | -2 | 2 | 21 |
| -117.6203 | -63.86259 | 6.91503 | 0.2911 | 2 | 2 | 22 |
| -117.6203 | -63.86259 | 13.83006 | 0.2911 | 2 | 2 | 23 |
| -117.6203 | -63.86259 | 20.74509 | 0.2911 | 2 | 2 | 24 |
| -117.6203 | -63.86259 | 27.66012 | 0.2911 | 2 | 2 | 25 |
| -117.6203 | -63.86259 | 34.57515 | 0.2911 | 2 | 2 | 26 |
| -117.6203 | -63.86259 | 41.49018 | 0.2911 | 2 | 2 | 27 |
| -117.6203 | -63.86259 | 48.40521 | 0.2911 | 2 | 2 | 28 |
| -117.6203 | -63.86259 | 55.32024 | 0.2911 | 2 | 2 | 29 |
| -117.6203 | -63.86259 | 62.23527 | 0.2911 | 2 | 2 | 30 |
| -117.6203 | -63.86259 | 69.1503 | 0.2911 | 2 | 2 | 31 |
| -117.6203 | -63.86259 | 76.06533 | 0.2911 | 2 | 2 | 32 |
| -117.6203 | -63.86259 | 82.98036 | 0.2911 | 2 | 2 | 33 |
| -117.6203 | -63.86259 | 89.89539 | 0.2911 | 2 | 2 | 34 |
| -117.6203 | -63.86259 | 96.81042 | 0.2911 | 2 | 2 | 35 |
| -117.6203 | -63.86259 | 103.7254 | 0.2911 | 2 | 2 | 36 |
| -117.6203 | -63.86259 | 110.6405 | 0.2911 | 2 | 2 | 37 |
| -117.6203 | -63.86259 | 117.5555 | 0.2911 | 2 | 2 | 38 |
| -117.6203 | -63.86259 | 124.4705 | 0.2911 | 2 | 2 | 39 |
| -117.6203 | -63.86259 | 131.3856 | 0.2911 | 2 | 0 | 40 |

| Wire No. | 3 | Coordinates | | | Connection | Pulse |
|-----------|-----------|-------------|--------|------|------------|-------|
| X | Y | Z | Radius | End1 | End2 | No. |
| -235.2405 | -127.7252 | 0 | 0.2474 | -3 | 3 | 41 |
| -235.2405 | -127.7252 | 6.840674 | 0.2474 | 3 | 3 | 42 |
| -235.2405 | -127.7252 | 13.68135 | 0.2474 | 3 | 3 | 43 |
| -235.2405 | -127.7252 | 20.52202 | 0.2474 | 3 | 3 | 44 |
| -235.2405 | -127.7252 | 27.3627 | 0.2474 | 3 | 3 | 45 |
| -235.2405 | -127.7252 | 34.20337 | 0.2474 | 3 | 3 | 46 |
| -235.2405 | -127.7252 | 41.04405 | 0.2474 | 3 | 3 | 47 |
| -235.2405 | -127.7252 | 47.88472 | 0.2474 | 3 | 3 | 48 |
| -235.2405 | -127.7252 | 54.7254 | 0.2474 | 3 | 3 | 49 |
| -235.2405 | -127.7252 | 61.56607 | 0.2474 | 3 | 3 | 50 |
| -235.2405 | -127.7252 | 68.40675 | 0.2474 | 3 | 3 | 51 |
| -235.2405 | -127.7252 | 75.24742 | 0.2474 | 3 | 3 | 52 |
| -235.2405 | -127.7252 | 82.0881 | 0.2474 | 3 | 3 | 53 |
| -235.2405 | -127.7252 | 88.92877 | 0.2474 | 3 | 3 | 54 |
| -235.2405 | -127.7252 | 95.76945 | 0.2474 | 3 | 3 | 55 |
| -235.2405 | -127.7252 | 102.6101 | 0.2474 | 3 | 3 | 56 |
| -235.2405 | -127.7252 | 109.4508 | 0.2474 | 3 | 3 | 57 |
| -235.2405 | -127.7252 | 116.2915 | 0.2474 | 3 | 3 | 58 |
| -235.2405 | -127.7252 | 123.1321 | 0.2474 | 3 | 3 | 59 |
| -235.2405 | -127.7252 | 129.9728 | 0.2474 | 3 | 0 | 60 |

Sources: 3
Pulse No., Voltage Magnitude, Phase (Degrees): 1, 100.0, 0.0
Pulse No., Voltage Magnitude, Phase (Degrees): 21, 0.0, 0.0
Pulse No., Voltage Magnitude, Phase (Degrees): 41, 0.0, 0.0

Number of Loads: 2
Pulse No., Resistance, Reactance: 21, 0, -10000
Pulse No., Resistance, Reactance: 41, 0, -10000

EXHIBIT I

KMON TOWER #1 FED TOWERS 2 & 3 FLOATING

***** SOURCE DATA *****

Pulse 1 Voltage = (100.0, 0.0j)
Current = (1.2523, -1.089j)
Impedance = (45.469, 39.541j)
Power = 62.61 Watts

Pulse 21 Voltage = (0.0, 0.0j)
Current = (-0.005, -0.0006j)
Impedance = (0.0, 0.0j)
Power = 0.000000 Watts

Pulse 41 Voltage = (0.0, 0.0j)
Current = (-0.0009, 0.0034j)
Impedance = (0.0, 0.0j)
Power = 0.000000 Watts

Total Power = 62.614 Watts

***** CURRENT DATA *****

Wire No. 1 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 1 | 1.2523 | -1.089 | 1.6596 | -41.0111 |
| 2 | 1.2487 | -1.1305 | 1.6844 | -42.1567 |
| 3 | 1.2378 | -1.1504 | 1.6899 | -42.9049 |
| 4 | 1.2198 | -1.1587 | 1.6824 | -43.5277 |
| 5 | 1.1947 | -1.1566 | 1.6628 | -44.0706 |
| 6 | 1.1627 | -1.1448 | 1.6317 | -44.5555 |
| 7 | 1.1239 | -1.1237 | 1.5893 | -44.9954 |
| 8 | 1.0786 | -1.0937 | 1.5361 | -45.399 |
| 9 | 1.027 | -1.0551 | 1.4724 | -45.7725 |
| 10 | 0.9694 | -1.0081 | 1.3986 | -46.1208 |
| 11 | 0.9061 | -0.9531 | 1.315 | -46.4475 |
| 12 | 0.8373 | -0.8903 | 1.2222 | -46.7557 |
| 13 | 0.7635 | -0.8202 | 1.1206 | -47.048 |
| 14 | 0.685 | -0.743 | 1.0106 | -47.3264 |
| 15 | 0.6021 | -0.6592 | 0.8928 | -47.5927 |
| 16 | 0.515 | -0.569 | 0.7674 | -47.8487 |
| 17 | 0.424 | -0.4725 | 0.6349 | -48.0956 |
| 18 | 0.3291 | -0.3699 | 0.4951 | -48.3351 |
| 19 | 0.2299 | -0.2605 | 0.3475 | -48.5686 |
| 20 | 0.1248 | -0.1425 | 0.1894 | -48.7996 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

EXHIBIT I

KMON TOWER #1 FED TOWERS 2 & 3 FLOATING

Wire No. 2 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 21 | -0.005 | -0.0006 | 0.0051 | -172.7899 |
| 22 | -0.0274 | -0.0035 | 0.0276 | -172.7548 |
| 23 | -0.0421 | -0.0054 | 0.0424 | -172.6991 |
| 24 | -0.0539 | -0.007 | 0.0543 | -172.6327 |
| 25 | -0.0635 | -0.0083 | 0.0641 | -172.5579 |
| 26 | -0.0713 | -0.0094 | 0.0719 | -172.4757 |
| 27 | -0.0773 | -0.0103 | 0.078 | -172.3868 |
| 28 | -0.0816 | -0.011 | 0.0823 | -172.2918 |
| 29 | -0.0843 | -0.0116 | 0.085 | -172.1911 |
| 30 | -0.0853 | -0.0119 | 0.0862 | -172.0852 |
| 31 | -0.0849 | -0.012 | 0.0857 | -171.9747 |
| 32 | -0.0829 | -0.0119 | 0.0838 | -171.86 |
| 33 | -0.0795 | -0.0115 | 0.0803 | -171.7417 |
| 34 | -0.0746 | -0.011 | 0.0754 | -171.6206 |
| 35 | -0.0684 | -0.0102 | 0.0691 | -171.4973 |
| 36 | -0.0608 | -0.0092 | 0.0615 | -171.3727 |
| 37 | -0.0518 | -0.008 | 0.0525 | -171.2475 |
| 38 | -0.0416 | -0.0065 | 0.0421 | -171.1227 |
| 39 | -0.03 | -0.0048 | 0.0304 | -170.999 |
| 40 | -0.0168 | -0.0027 | 0.017 | -170.8762 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

Wire No. 3 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 41 | -0.0009 | 0.0034 | 0.0035 | 104.6125 |
| 42 | -0.0046 | 0.0177 | 0.0182 | 104.581 |
| 43 | -0.007 | 0.0272 | 0.0281 | 104.5314 |
| 44 | -0.009 | 0.0349 | 0.036 | 104.4725 |
| 45 | -0.0106 | 0.0413 | 0.0426 | 104.4064 |
| 46 | -0.0119 | 0.0464 | 0.0479 | 104.3341 |
| 47 | -0.0128 | 0.0505 | 0.0521 | 104.2563 |
| 48 | -0.0135 | 0.0535 | 0.0551 | 104.1732 |
| 49 | -0.0139 | 0.0554 | 0.0571 | 104.0853 |
| 50 | -0.014 | 0.0563 | 0.058 | 103.9928 |
| 51 | -0.0139 | 0.0561 | 0.0578 | 103.8957 |
| 52 | -0.0135 | 0.055 | 0.0566 | 103.7942 |
| 53 | -0.0129 | 0.0529 | 0.0544 | 103.6884 |
| 54 | -0.012 | 0.0498 | 0.0513 | 103.5781 |
| 55 | -0.011 | 0.0458 | 0.0471 | 103.4633 |
| 56 | -0.0097 | 0.0408 | 0.042 | 103.3438 |
| 57 | -0.0082 | 0.035 | 0.0359 | 103.2194 |
| 58 | -0.0065 | 0.0281 | 0.0289 | 103.0897 |
| 59 | -0.0047 | 0.0203 | 0.0209 | 102.9541 |
| 60 | -0.0026 | 0.0114 | 0.0117 | 102.8107 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

***** BASE OPERATING PARAMETERS *****

| Twr. | Ratio | Phase |
|------|-------|--------|
| 1 | 1.000 | 0.0 |
| 2 | 0.003 | -131.8 |
| 3 | 0.002 | 145.6 |

EXHIBIT I

KMON TOWER #2 FED TOWERS 1 & 3 FLOATING

 ACSModel
 (MININEC 3.1 Core)
 03-26-2011 15:44:54

KMON TOWER #2

Frequency = 0.560 MHz Wavelength = 535.35714 Meters

No. of Wires: 3

| Wire No. 1 | Coordinates | | | Radius | End Connection | No. of Segments |
|------------|-------------|----------|--------|--------|----------------|-----------------|
| X | Y | Z | | | | |
| 0 | 0 | 0 | 0.2911 | -1 | | |
| 0 | 0 | 138.3006 | 0.2911 | 0 | 20 | |

| Wire No. 2 | Coordinates | | | Radius | End Connection | No. of Segments |
|------------|-------------|----------|--------|--------|----------------|-----------------|
| X | Y | Z | | | | |
| -117.6203 | -63.86259 | 0 | 0.2911 | -2 | | |
| -117.6203 | -63.86259 | 138.3006 | 0.2911 | 0 | 20 | |

| Wire No. 3 | Coordinates | | | Radius | End Connection | No. of Segments |
|------------|-------------|----------|--------|--------|----------------|-----------------|
| X | Y | Z | | | | |
| -235.2405 | -127.7252 | 0 | 0.2911 | -3 | | |
| -235.2405 | -127.7252 | 136.8135 | 0.2474 | 0 | 20 | |

**** ANTENNA GEOMETRY ****

| Wire No. 1 | Coordinates | | | Radius | Connection Pulse | | |
|------------|-------------|----------|--------|--------|------------------|-----|--|
| X | Y | Z | | End1 | End2 | No. | |
| 0 | 0 | 0 | 0.2911 | -1 | 1 | 1 | |
| 0 | 0 | 6.91503 | 0.2911 | 1 | 1 | 2 | |
| 0 | 0 | 13.83006 | 0.2911 | 1 | 1 | 3 | |
| 0 | 0 | 20.74509 | 0.2911 | 1 | 1 | 4 | |
| 0 | 0 | 27.66012 | 0.2911 | 1 | 1 | 5 | |
| 0 | 0 | 34.57515 | 0.2911 | 1 | 1 | 6 | |
| 0 | 0 | 41.49018 | 0.2911 | 1 | 1 | 7 | |
| 0 | 0 | 48.40521 | 0.2911 | 1 | 1 | 8 | |
| 0 | 0 | 55.32024 | 0.2911 | 1 | 1 | 9 | |
| 0 | 0 | 62.23527 | 0.2911 | 1 | 1 | 10 | |
| 0 | 0 | 69.1503 | 0.2911 | 1 | 1 | 11 | |
| 0 | 0 | 76.06533 | 0.2911 | 1 | 1 | 12 | |
| 0 | 0 | 82.98036 | 0.2911 | 1 | 1 | 13 | |
| 0 | 0 | 89.89539 | 0.2911 | 1 | 1 | 14 | |
| 0 | 0 | 96.81042 | 0.2911 | 1 | 1 | 15 | |
| 0 | 0 | 103.7254 | 0.2911 | 1 | 1 | 16 | |
| 0 | 0 | 110.6405 | 0.2911 | 1 | 1 | 17 | |
| 0 | 0 | 117.5555 | 0.2911 | 1 | 1 | 18 | |
| 0 | 0 | 124.4705 | 0.2911 | 1 | 1 | 19 | |
| 0 | 0 | 131.3856 | 0.2911 | 1 | 0 | 20 | |

EXHIBIT I

KMON TOWER #2 FED TOWERS 1 & 3 FLOATING

| Wire No. | 2 | Coordinates | | | Connection | | Pulse |
|-----------|---|-------------|----------|--------|------------|------|-------|
| X | | Y | Z | Radius | End1 | End2 | No. |
| -117.6203 | | -63.86259 | 0 | 0.2911 | -2 | 2 | 21 |
| -117.6203 | | -63.86259 | 6.91503 | 0.2911 | 2 | 2 | 22 |
| -117.6203 | | -63.86259 | 13.83006 | 0.2911 | 2 | 2 | 23 |
| -117.6203 | | -63.86259 | 20.74509 | 0.2911 | 2 | 2 | 24 |
| -117.6203 | | -63.86259 | 27.66012 | 0.2911 | 2 | 2 | 25 |
| -117.6203 | | -63.86259 | 34.57515 | 0.2911 | 2 | 2 | 26 |
| -117.6203 | | -63.86259 | 41.49018 | 0.2911 | 2 | 2 | 27 |
| -117.6203 | | -63.86259 | 48.40521 | 0.2911 | 2 | 2 | 28 |
| -117.6203 | | -63.86259 | 55.32024 | 0.2911 | 2 | 2 | 29 |
| -117.6203 | | -63.86259 | 62.23527 | 0.2911 | 2 | 2 | 30 |
| -117.6203 | | -63.86259 | 69.1503 | 0.2911 | 2 | 2 | 31 |
| -117.6203 | | -63.86259 | 76.06533 | 0.2911 | 2 | 2 | 32 |
| -117.6203 | | -63.86259 | 82.98036 | 0.2911 | 2 | 2 | 33 |
| -117.6203 | | -63.86259 | 89.89539 | 0.2911 | 2 | 2 | 34 |
| -117.6203 | | -63.86259 | 96.81042 | 0.2911 | 2 | 2 | 35 |
| -117.6203 | | -63.86259 | 103.7254 | 0.2911 | 2 | 2 | 36 |
| -117.6203 | | -63.86259 | 110.6405 | 0.2911 | 2 | 2 | 37 |
| -117.6203 | | -63.86259 | 117.5555 | 0.2911 | 2 | 2 | 38 |
| -117.6203 | | -63.86259 | 124.4705 | 0.2911 | 2 | 2 | 39 |
| -117.6203 | | -63.86259 | 131.3856 | 0.2911 | 2 | 0 | 40 |

| Wire No. | 3 | Coordinates | | | Connection | | Pulse |
|-----------|---|-------------|----------|--------|------------|------|-------|
| X | | Y | Z | Radius | End1 | End2 | No. |
| -235.2405 | | -127.7252 | 0 | 0.2474 | -3 | 3 | 41 |
| -235.2405 | | -127.7252 | 6.840674 | 0.2474 | 3 | 3 | 42 |
| -235.2405 | | -127.7252 | 13.68135 | 0.2474 | 3 | 3 | 43 |
| -235.2405 | | -127.7252 | 20.52202 | 0.2474 | 3 | 3 | 44 |
| -235.2405 | | -127.7252 | 27.3627 | 0.2474 | 3 | 3 | 45 |
| -235.2405 | | -127.7252 | 34.20337 | 0.2474 | 3 | 3 | 46 |
| -235.2405 | | -127.7252 | 41.04405 | 0.2474 | 3 | 3 | 47 |
| -235.2405 | | -127.7252 | 47.88472 | 0.2474 | 3 | 3 | 48 |
| -235.2405 | | -127.7252 | 54.7254 | 0.2474 | 3 | 3 | 49 |
| -235.2405 | | -127.7252 | 61.56607 | 0.2474 | 3 | 3 | 50 |
| -235.2405 | | -127.7252 | 68.40675 | 0.2474 | 3 | 3 | 51 |
| -235.2405 | | -127.7252 | 75.24742 | 0.2474 | 3 | 3 | 52 |
| -235.2405 | | -127.7252 | 82.0881 | 0.2474 | 3 | 3 | 53 |
| -235.2405 | | -127.7252 | 88.92877 | 0.2474 | 3 | 3 | 54 |
| -235.2405 | | -127.7252 | 95.76945 | 0.2474 | 3 | 3 | 55 |
| -235.2405 | | -127.7252 | 102.6101 | 0.2474 | 3 | 3 | 56 |
| -235.2405 | | -127.7252 | 109.4508 | 0.2474 | 3 | 3 | 57 |
| -235.2405 | | -127.7252 | 116.2915 | 0.2474 | 3 | 3 | 58 |
| -235.2405 | | -127.7252 | 123.1321 | 0.2474 | 3 | 3 | 59 |
| -235.2405 | | -127.7252 | 129.9728 | 0.2474 | 3 | 0 | 60 |

Sources: 3

Pulse No., Voltage Magnitude, Phase (Degrees): 1, 0.0, 0.0
Pulse No., Voltage Magnitude, Phase (Degrees): 21, 100.0, 0.0
Pulse No., Voltage Magnitude, Phase (Degrees): 41, 0.0, 0.0

Number of Loads: 2

Pulse No., Resistance, Reactance: 1, 0, -10000
Pulse No., Resistance, Reactance: 41, 0, -10000

EXHIBIT I

KMON TOWER #2 FED TOWERS 1 & 3 FLOATING

```

***** SOURCE DATA *****
Pulse 1   Voltage = (0.0, 0.0j)
          Current = (-0.0052, -0.0006j)
          Impedance = (0.0, 0.0j)
          Power = 0.000000 Watts

Pulse 21  Voltage = (100.0, 0.0j)
          Current = (1.2764, -1.1439j)
          Impedance = (43.449, 38.939j)
          Power = 63.82 Watts

Pulse 41  Voltage = (0.0, 0.0j)
          Current = (-0.0051, -0.0006j)
          Impedance = (0.0, 0.0j)
          Power = 0.000000 Watts

```

Total Power = 63.820 Watts

```

***** CURRENT DATA *****
Wire No. 1 :
Pulse      Real      Imaginary    Magnitude    Phase
No.        (Amps)     (Amps)       (Amps)       (Degrees)
1          -0.0052    -0.0006      0.0052       -173.6567
2          -0.0284    -0.0032      0.0285       -173.6216
3          -0.0435    -0.0049      0.0438       -173.5659
4          -0.0557    -0.0064      0.0561       -173.4995
5          -0.0657    -0.0076      0.0662       -173.4245
6          -0.0738    -0.0086      0.0743       -173.3419
7          -0.08      -0.0095      0.0805       -173.2524
8          -0.0844    -0.0101      0.085        -173.1564
9          -0.0872    -0.0106      0.0878       -173.0544
10         -0.0883    -0.0109      0.089        -172.9467
11         -0.0879    -0.011       0.0886       -172.8338
12         -0.0858    -0.011       0.0865       -172.7162
13         -0.0823    -0.0107      0.083        -172.5945
14         -0.0772    -0.0102      0.0779       -172.4693
15         -0.0708    -0.0095      0.0714       -172.3413
16         -0.0629    -0.0086      0.0635       -172.2114
17         -0.0537    -0.0075      0.0542       -172.0804
18         -0.0431    -0.0061      0.0435       -171.9491
19         -0.0311    -0.0045      0.0314       -171.8183
20         -0.0174    -0.0025      0.0176       -171.6878
E          0.0        0.0          0.0          0.0

```


EXHIBIT I

KMON TOWER #2 FED TOWERS 1 & 3 FLOATING

Wire No. 2 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 21 | 1.2764 | -1.1439 | 1.714 | -41.8662 |
| 22 | 1.2727 | -1.1852 | 1.7391 | -42.9612 |
| 23 | 1.2616 | -1.2047 | 1.7444 | -43.6768 |
| 24 | 1.2433 | -1.2121 | 1.7364 | -44.2725 |
| 25 | 1.2177 | -1.2089 | 1.7159 | -44.7919 |
| 26 | 1.1851 | -1.1957 | 1.6835 | -45.256 |
| 27 | 1.1456 | -1.173 | 1.6396 | -45.6771 |
| 28 | 1.0994 | -1.141 | 1.5845 | -46.0636 |
| 29 | 1.0468 | -1.1001 | 1.5186 | -46.4213 |
| 30 | 0.9881 | -1.0506 | 1.4423 | -46.755 |
| 31 | 0.9236 | -0.9928 | 1.356 | -47.0681 |
| 32 | 0.8535 | -0.927 | 1.2601 | -47.3636 |
| 33 | 0.7783 | -0.8537 | 1.1552 | -47.6438 |
| 34 | 0.6983 | -0.7731 | 1.0417 | -47.9109 |
| 35 | 0.6137 | -0.6856 | 0.9202 | -48.1665 |
| 36 | 0.525 | -0.5916 | 0.7909 | -48.4123 |
| 37 | 0.4322 | -0.4911 | 0.6542 | -48.6495 |
| 38 | 0.3355 | -0.3843 | 0.5102 | -48.8796 |
| 39 | 0.2344 | -0.2706 | 0.358 | -49.1041 |
| 40 | 0.1272 | -0.148 | 0.1951 | -49.3263 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

Wire No. 3 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 41 | -0.0051 | -0.0006 | 0.0051 | -173.2916 |
| 42 | -0.0263 | -0.0031 | 0.0265 | -173.256 |
| 43 | -0.0404 | -0.0048 | 0.0407 | -173.1998 |
| 44 | -0.0518 | -0.0062 | 0.0522 | -173.1329 |
| 45 | -0.0611 | -0.0074 | 0.0616 | -173.0573 |
| 46 | -0.0687 | -0.0085 | 0.0692 | -172.9742 |
| 47 | -0.0745 | -0.0093 | 0.0751 | -172.8841 |
| 48 | -0.0787 | -0.01 | 0.0793 | -172.7876 |
| 49 | -0.0813 | -0.0104 | 0.0819 | -172.6849 |
| 50 | -0.0823 | -0.0107 | 0.083 | -172.5764 |
| 51 | -0.0819 | -0.0108 | 0.0826 | -172.4628 |
| 52 | -0.08 | -0.0108 | 0.0808 | -172.3443 |
| 53 | -0.0767 | -0.0105 | 0.0774 | -172.2215 |
| 54 | -0.072 | -0.01 | 0.0727 | -172.0951 |
| 55 | -0.066 | -0.0093 | 0.0666 | -171.9658 |
| 56 | -0.0586 | -0.0084 | 0.0593 | -171.8342 |
| 57 | -0.05 | -0.0073 | 0.0506 | -171.7013 |
| 58 | -0.0401 | -0.0059 | 0.0406 | -171.5678 |
| 59 | -0.0289 | -0.0044 | 0.0292 | -171.4344 |
| 60 | -0.0161 | -0.0025 | 0.0163 | -171.3012 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

***** BASE OPERATING PARAMETERS *****

| Twr. | Ratio | Phase |
|------|-------|--------|
| 1 | 0.003 | -131.8 |
| 2 | 1.000 | 0.0 |
| 3 | 0.003 | -131.4 |

EXHIBIT I

KMON TOWER #3 FED TOWERS 1 & 2 FLOATING

 ACSModel
 (MININEC 3.1 Core)
 03-26-2011 15:41:18

KMON TOWER #3

Frequency = 0.560 MHz Wavelength = 535.35714 Meters

No. of Wires: 3

| Wire No. | Coordinates | Radius | End Connection | No. of Segments |
|-----------|--------------------|--------|----------------|-----------------|
| 1 | X Y Z | | | |
| 0 | 0 0 0 | 0.2911 | -1 | 20 |
| 0 | 0 0 138.3006 | 0.2911 | 0 | 20 |
| 2 | X Y Z | | | |
| -117.6203 | -63.86259 0 | 0.2911 | -2 | 20 |
| -117.6203 | -63.86259 138.3006 | 0.2911 | 0 | 20 |
| 3 | X Y Z | | | |
| -235.2405 | -127.7252 0 | 0.2474 | -3 | 20 |
| -235.2405 | -127.7252 136.8135 | 0.2474 | 0 | 20 |

**** ANTENNA GEOMETRY ****

| Wire No. | Coordinates | Radius | Connection | Pulse |
|----------|-------------|--------|------------|-------|
| X | Y Z | | End1 End2 | No. |
| 0 | 0 0 | 0.2911 | -1 1 | 1 |
| 0 | 0 6.91503 | 0.2911 | 1 1 | 2 |
| 0 | 0 13.83006 | 0.2911 | 1 1 | 3 |
| 0 | 0 20.74509 | 0.2911 | 1 1 | 4 |
| 0 | 0 27.66012 | 0.2911 | 1 1 | 5 |
| 0 | 0 34.57515 | 0.2911 | 1 1 | 6 |
| 0 | 0 41.49018 | 0.2911 | 1 1 | 7 |
| 0 | 0 48.40521 | 0.2911 | 1 1 | 8 |
| 0 | 0 55.32024 | 0.2911 | 1 1 | 9 |
| 0 | 0 62.23527 | 0.2911 | 1 1 | 10 |
| 0 | 0 69.1503 | 0.2911 | 1 1 | 11 |
| 0 | 0 76.06533 | 0.2911 | 1 1 | 12 |
| 0 | 0 82.98036 | 0.2911 | 1 1 | 13 |
| 0 | 0 89.89539 | 0.2911 | 1 1 | 14 |
| 0 | 0 96.81042 | 0.2911 | 1 1 | 15 |
| 0 | 0 103.7254 | 0.2911 | 1 1 | 16 |
| 0 | 0 110.6405 | 0.2911 | 1 1 | 17 |
| 0 | 0 117.5555 | 0.2911 | 1 1 | 18 |
| 0 | 0 124.4705 | 0.2911 | 1 1 | 19 |
| 0 | 0 131.3856 | 0.2911 | 1 0 | 20 |

EXHIBIT I

KMON TOWER #3 FED TOWERS 1 & 2 FLOATING

| Wire No. | 2 | Coordinates | | | Radius | Connection | | Pulse |
|-----------|-----------|-------------|--|--------|--------|------------|------|-------|
| X | Y | Z | | | | End1 | End2 | No. |
| -117.6203 | -63.86259 | 0 | | 0.2911 | | -2 | 2 | 21 |
| -117.6203 | -63.86259 | 6.91503 | | 0.2911 | | 2 | 2 | 22 |
| -117.6203 | -63.86259 | 13.83006 | | 0.2911 | | 2 | 2 | 23 |
| -117.6203 | -63.86259 | 20.74509 | | 0.2911 | | 2 | 2 | 24 |
| -117.6203 | -63.86259 | 27.66012 | | 0.2911 | | 2 | 2 | 25 |
| -117.6203 | -63.86259 | 34.57515 | | 0.2911 | | 2 | 2 | 26 |
| -117.6203 | -63.86259 | 41.49018 | | 0.2911 | | 2 | 2 | 27 |
| -117.6203 | -63.86259 | 48.40521 | | 0.2911 | | 2 | 2 | 28 |
| -117.6203 | -63.86259 | 55.32024 | | 0.2911 | | 2 | 2 | 29 |
| -117.6203 | -63.86259 | 62.23527 | | 0.2911 | | 2 | 2 | 30 |
| -117.6203 | -63.86259 | 69.1503 | | 0.2911 | | 2 | 2 | 31 |
| -117.6203 | -63.86259 | 76.06533 | | 0.2911 | | 2 | 2 | 32 |
| -117.6203 | -63.86259 | 82.98036 | | 0.2911 | | 2 | 2 | 33 |
| -117.6203 | -63.86259 | 89.89539 | | 0.2911 | | 2 | 2 | 34 |
| -117.6203 | -63.86259 | 96.81042 | | 0.2911 | | 2 | 2 | 35 |
| -117.6203 | -63.86259 | 103.7254 | | 0.2911 | | 2 | 2 | 36 |
| -117.6203 | -63.86259 | 110.6405 | | 0.2911 | | 2 | 2 | 37 |
| -117.6203 | -63.86259 | 117.5555 | | 0.2911 | | 2 | 2 | 38 |
| -117.6203 | -63.86259 | 124.4705 | | 0.2911 | | 2 | 2 | 39 |
| -117.6203 | -63.86259 | 131.3856 | | 0.2911 | | 2 | 0 | 40 |

| Wire No. | 3 | Coordinates | | | Radius | Connection | | Pulse |
|-----------|-----------|-------------|--|--------|--------|------------|------|-------|
| X | Y | Z | | | | End1 | End2 | No. |
| -235.2405 | -127.7252 | 0 | | 0.2474 | | -3 | 3 | 41 |
| -235.2405 | -127.7252 | 6.840674 | | 0.2474 | | 3 | 3 | 42 |
| -235.2405 | -127.7252 | 13.68135 | | 0.2474 | | 3 | 3 | 43 |
| -235.2405 | -127.7252 | 20.52202 | | 0.2474 | | 3 | 3 | 44 |
| -235.2405 | -127.7252 | 27.3627 | | 0.2474 | | 3 | 3 | 45 |
| -235.2405 | -127.7252 | 34.20337 | | 0.2474 | | 3 | 3 | 46 |
| -235.2405 | -127.7252 | 41.04405 | | 0.2474 | | 3 | 3 | 47 |
| -235.2405 | -127.7252 | 47.88472 | | 0.2474 | | 3 | 3 | 48 |
| -235.2405 | -127.7252 | 54.7254 | | 0.2474 | | 3 | 3 | 49 |
| -235.2405 | -127.7252 | 61.56607 | | 0.2474 | | 3 | 3 | 50 |
| -235.2405 | -127.7252 | 68.40675 | | 0.2474 | | 3 | 3 | 51 |
| -235.2405 | -127.7252 | 75.24742 | | 0.2474 | | 3 | 3 | 52 |
| -235.2405 | -127.7252 | 82.0881 | | 0.2474 | | 3 | 3 | 53 |
| -235.2405 | -127.7252 | 88.92877 | | 0.2474 | | 3 | 3 | 54 |
| -235.2405 | -127.7252 | 95.76945 | | 0.2474 | | 3 | 3 | 55 |
| -235.2405 | -127.7252 | 102.6101 | | 0.2474 | | 3 | 3 | 56 |
| -235.2405 | -127.7252 | 109.4508 | | 0.2474 | | 3 | 3 | 57 |
| -235.2405 | -127.7252 | 116.2915 | | 0.2474 | | 3 | 3 | 58 |
| -235.2405 | -127.7252 | 123.1321 | | 0.2474 | | 3 | 3 | 59 |
| -235.2405 | -127.7252 | 129.9728 | | 0.2474 | | 3 | 0 | 60 |

Sources: 3

Pulse No., Voltage Magnitude, Phase (Degrees): 1, 0.0, 0.0

Pulse No., Voltage Magnitude, Phase (Degrees): 21, 0.0, 0.0

Pulse No., Voltage Magnitude, Phase (Degrees): 41, 100.0, 0.0

Number of Loads: 2

Pulse No., Resistance, Reactance: 1, 0, -10000

Pulse No., Resistance, Reactance: 21, 0, -10000

EXHIBIT I

KMON TOWER #3 FED TOWERS 1 & 2 FLOATING

***** SOURCE DATA *****

Pulse 1 Voltage = (0.0, 0.0j)
Current = (-0.0012, 0.0037j)
Impedance = (0.0, 0.0j)
Power = 0.000000 Watts

Pulse 21 Voltage = (0.0, 0.0j)
Current = (-0.0053, -0.001j)
Impedance = (0.0, 0.0j)
Power = 0.000000 Watts

Pulse 41 Voltage = (100.0, 0.0j)
Current = (1.4315, -1.1114j)
Impedance = (43.585, 33.84j)
Power = 71.57 Watts

Total Power = 71.573 Watts

***** CURRENT DATA *****

Wire No. 1 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 1 | -0.0012 | 0.0037 | 0.0038 | 107.7869 |
| 2 | -0.0064 | 0.02 | 0.021 | 107.7551 |
| 3 | -0.0098 | 0.0307 | 0.0322 | 107.705 |
| 4 | -0.0125 | 0.0394 | 0.0414 | 107.6454 |
| 5 | -0.0148 | 0.0466 | 0.0488 | 107.5785 |
| 6 | -0.0165 | 0.0524 | 0.0549 | 107.5052 |
| 7 | -0.0179 | 0.0569 | 0.0596 | 107.4263 |
| 8 | -0.0188 | 0.0602 | 0.0631 | 107.3421 |
| 9 | -0.0194 | 0.0624 | 0.0653 | 107.2529 |
| 10 | -0.0196 | 0.0634 | 0.0663 | 107.159 |
| 11 | -0.0194 | 0.0632 | 0.0661 | 107.0606 |
| 12 | -0.0189 | 0.062 | 0.0648 | 106.9576 |
| 13 | -0.018 | 0.0596 | 0.0623 | 106.8502 |
| 14 | -0.0169 | 0.0561 | 0.0586 | 106.7383 |
| 15 | -0.0154 | 0.0516 | 0.0538 | 106.6218 |
| 16 | -0.0136 | 0.046 | 0.048 | 106.5005 |
| 17 | -0.0116 | 0.0394 | 0.0411 | 106.3742 |
| 18 | -0.0092 | 0.0317 | 0.0331 | 106.2424 |
| 19 | -0.0066 | 0.023 | 0.0239 | 106.1045 |
| 20 | -0.0037 | 0.0129 | 0.0134 | 105.9584 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

EXHIBIT I

KMON TOWER #3 FED TOWERS 1 & 2 FLOATING

Wire No. 2 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 21 | -0.0053 | -0.001 | 0.0054 | -169.2505 |
| 22 | -0.029 | -0.0055 | 0.0295 | -169.2122 |
| 23 | -0.0444 | -0.0085 | 0.0452 | -169.1517 |
| 24 | -0.0569 | -0.011 | 0.058 | -169.0797 |
| 25 | -0.0671 | -0.013 | 0.0683 | -168.9985 |
| 26 | -0.0753 | -0.0148 | 0.0767 | -168.9095 |
| 27 | -0.0816 | -0.0161 | 0.0832 | -168.8134 |
| 28 | -0.0861 | -0.0172 | 0.0878 | -168.7108 |
| 29 | -0.0889 | -0.0179 | 0.0907 | -168.6024 |
| 30 | -0.09 | -0.0183 | 0.0919 | -168.4886 |
| 31 | -0.0895 | -0.0184 | 0.0914 | -168.3701 |
| 32 | -0.0874 | -0.0182 | 0.0893 | -168.2474 |
| 33 | -0.0838 | -0.0176 | 0.0856 | -168.1213 |
| 34 | -0.0786 | -0.0167 | 0.0804 | -167.9925 |
| 35 | -0.072 | -0.0155 | 0.0737 | -167.8617 |
| 36 | -0.064 | -0.0139 | 0.0655 | -167.7298 |
| 37 | -0.0546 | -0.012 | 0.0559 | -167.5977 |
| 38 | -0.0438 | -0.0097 | 0.0449 | -167.4664 |
| 39 | -0.0316 | -0.0071 | 0.0324 | -167.3365 |
| 40 | -0.0177 | -0.004 | 0.0181 | -167.208 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

Wire No. 3 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 41 | 1.4315 | -1.1114 | 1.8123 | -37.8258 |
| 42 | 1.4273 | -1.1501 | 1.833 | -38.8603 |
| 43 | 1.415 | -1.1685 | 1.8351 | -39.5506 |
| 44 | 1.3944 | -1.1754 | 1.8237 | -40.1287 |
| 45 | 1.3658 | -1.1721 | 1.7997 | -40.6349 |
| 46 | 1.3293 | -1.1591 | 1.7637 | -41.0886 |
| 47 | 1.285 | -1.1369 | 1.7158 | -41.5013 |
| 48 | 1.2333 | -1.1058 | 1.6565 | -41.881 |
| 49 | 1.1744 | -1.0661 | 1.5861 | -42.233 |
| 50 | 1.1086 | -1.0181 | 1.5051 | -42.5619 |
| 51 | 1.0363 | -0.962 | 1.4139 | -42.871 |
| 52 | 0.9577 | -0.8982 | 1.313 | -43.1629 |
| 53 | 0.8733 | -0.827 | 1.2028 | -43.4401 |
| 54 | 0.7835 | -0.7489 | 1.0838 | -43.7044 |
| 55 | 0.6886 | -0.664 | 0.9566 | -43.9576 |
| 56 | 0.589 | -0.5728 | 0.8216 | -44.201 |
| 57 | 0.4848 | -0.4753 | 0.6789 | -44.4361 |
| 58 | 0.3761 | -0.3717 | 0.5288 | -44.6642 |
| 59 | 0.2624 | -0.2614 | 0.3704 | -44.8867 |
| 60 | 0.1419 | -0.1425 | 0.2011 | -45.1066 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

***** BASE OPERATING PARAMETERS *****

| Twr. | Ratio | Phase |
|------|-------|--------|
| 1 | 0.002 | 145.6 |
| 2 | 0.003 | -131.4 |
| 3 | 1.000 | 0.0 |

EXHIBIT II

KMON NIGHT DA ARRAY

 ACSModel
 (MININEC 3.1 Core)
 03-26-2011 16:28:31

KMON NIGHT DA ARRAY

Frequency = 0.560 MHz Wavelength = 535.35714 Meters

No. of Wires: 3

| Wire No. 1 | Coordinates | | | Radius | End Connection | No. of Segments |
|------------|-------------|----------|--------|--------|----------------|-----------------|
| X | Y | Z | | | | |
| 0 | 0 | 0 | | -1 | | |
| 0 | 0 | 138.3006 | 0.2911 | 0 | | 20 |
| Wire No. 2 | Coordinates | | | Radius | End Connection | No. of Segments |
| X | Y | Z | | | | |
| -117.6203 | -63.86259 | 0 | | -2 | | |
| -117.6203 | -63.86259 | 138.3006 | 0.2911 | 0 | | 20 |
| Wire No. 3 | Coordinates | | | Radius | End Connection | No. of Segments |
| X | Y | Z | | | | |
| -235.2405 | -127.7252 | 0 | | -3 | | |
| -235.2405 | -127.7252 | 136.8135 | 0.2474 | 0 | | 20 |

**** ANTENNA GEOMETRY ****

| Wire No. 1 | Coordinates | | | Radius | Connection Pulse | | |
|------------|-------------|----------|--------|--------|------------------|-----|--|
| X | Y | Z | | End1 | End2 | No. | |
| 0 | 0 | 0 | 0.2911 | -1 | 1 | 1 | |
| 0 | 0 | 6.91503 | 0.2911 | 1 | 1 | 2 | |
| 0 | 0 | 13.83006 | 0.2911 | 1 | 1 | 3 | |
| 0 | 0 | 20.74509 | 0.2911 | 1 | 1 | 4 | |
| 0 | 0 | 27.66012 | 0.2911 | 1 | 1 | 5 | |
| 0 | 0 | 34.57515 | 0.2911 | 1 | 1 | 6 | |
| 0 | 0 | 41.49018 | 0.2911 | 1 | 1 | 7 | |
| 0 | 0 | 48.40521 | 0.2911 | 1 | 1 | 8 | |
| 0 | 0 | 55.32024 | 0.2911 | 1 | 1 | 9 | |
| 0 | 0 | 62.23527 | 0.2911 | 1 | 1 | 10 | |
| 0 | 0 | 69.1503 | 0.2911 | 1 | 1 | 11 | |
| 0 | 0 | 76.06533 | 0.2911 | 1 | 1 | 12 | |
| 0 | 0 | 82.98036 | 0.2911 | 1 | 1 | 13 | |
| 0 | 0 | 89.89539 | 0.2911 | 1 | 1 | 14 | |
| 0 | 0 | 96.81042 | 0.2911 | 1 | 1 | 15 | |
| 0 | 0 | 103.7254 | 0.2911 | 1 | 1 | 16 | |
| 0 | 0 | 110.6405 | 0.2911 | 1 | 1 | 17 | |
| 0 | 0 | 117.5555 | 0.2911 | 1 | 1 | 18 | |
| 0 | 0 | 124.4705 | 0.2911 | 1 | 1 | 19 | |
| 0 | 0 | 131.3856 | 0.2911 | 1 | 0 | 20 | |

EXHIBIT II

KMON NIGHT DA ARRAY

| Wire No. | 2 | Coordinates | | | Connection | Pulse |
|-----------|-----------|-------------|--------|------|------------|-------|
| X | Y | Z | Radius | End1 | End2 | No. |
| -117.6203 | -63.86259 | 0 | 0.2911 | -2 | 2 | 21 |
| -117.6203 | -63.86259 | 6.91503 | 0.2911 | 2 | 2 | 22 |
| -117.6203 | -63.86259 | 13.83006 | 0.2911 | 2 | 2 | 23 |
| -117.6203 | -63.86259 | 20.74509 | 0.2911 | 2 | 2 | 24 |
| -117.6203 | -63.86259 | 27.66012 | 0.2911 | 2 | 2 | 25 |
| -117.6203 | -63.86259 | 34.57515 | 0.2911 | 2 | 2 | 26 |
| -117.6203 | -63.86259 | 41.49018 | 0.2911 | 2 | 2 | 27 |
| -117.6203 | -63.86259 | 48.40521 | 0.2911 | 2 | 2 | 28 |
| -117.6203 | -63.86259 | 55.32024 | 0.2911 | 2 | 2 | 29 |
| -117.6203 | -63.86259 | 62.23527 | 0.2911 | 2 | 2 | 30 |
| -117.6203 | -63.86259 | 69.1503 | 0.2911 | 2 | 2 | 31 |
| -117.6203 | -63.86259 | 76.06533 | 0.2911 | 2 | 2 | 32 |
| -117.6203 | -63.86259 | 82.98036 | 0.2911 | 2 | 2 | 33 |
| -117.6203 | -63.86259 | 89.89539 | 0.2911 | 2 | 2 | 34 |
| -117.6203 | -63.86259 | 96.81042 | 0.2911 | 2 | 2 | 35 |
| -117.6203 | -63.86259 | 103.7254 | 0.2911 | 2 | 2 | 36 |
| -117.6203 | -63.86259 | 110.6405 | 0.2911 | 2 | 2 | 37 |
| -117.6203 | -63.86259 | 117.5555 | 0.2911 | 2 | 2 | 38 |
| -117.6203 | -63.86259 | 124.4705 | 0.2911 | 2 | 2 | 39 |
| -117.6203 | -63.86259 | 131.3856 | 0.2911 | 2 | 0 | 40 |

| Wire No. | 3 | Coordinates | | | Connection | Pulse |
|-----------|-----------|-------------|--------|------|------------|-------|
| X | Y | Z | Radius | End1 | End2 | No. |
| -235.2405 | -127.7252 | 0 | 0.2474 | -3 | 3 | 41 |
| -235.2405 | -127.7252 | 6.840674 | 0.2474 | 3 | 3 | 42 |
| -235.2405 | -127.7252 | 13.68135 | 0.2474 | 3 | 3 | 43 |
| -235.2405 | -127.7252 | 20.52202 | 0.2474 | 3 | 3 | 44 |
| -235.2405 | -127.7252 | 27.3627 | 0.2474 | 3 | 3 | 45 |
| -235.2405 | -127.7252 | 34.20337 | 0.2474 | 3 | 3 | 46 |
| -235.2405 | -127.7252 | 41.04405 | 0.2474 | 3 | 3 | 47 |
| -235.2405 | -127.7252 | 47.88472 | 0.2474 | 3 | 3 | 48 |
| -235.2405 | -127.7252 | 54.7254 | 0.2474 | 3 | 3 | 49 |
| -235.2405 | -127.7252 | 61.56607 | 0.2474 | 3 | 3 | 50 |
| -235.2405 | -127.7252 | 68.40675 | 0.2474 | 3 | 3 | 51 |
| -235.2405 | -127.7252 | 75.24742 | 0.2474 | 3 | 3 | 52 |
| -235.2405 | -127.7252 | 82.0881 | 0.2474 | 3 | 3 | 53 |
| -235.2405 | -127.7252 | 88.92877 | 0.2474 | 3 | 3 | 54 |
| -235.2405 | -127.7252 | 95.76945 | 0.2474 | 3 | 3 | 55 |
| -235.2405 | -127.7252 | 102.6101 | 0.2474 | 3 | 3 | 56 |
| -235.2405 | -127.7252 | 109.4508 | 0.2474 | 3 | 3 | 57 |
| -235.2405 | -127.7252 | 116.2915 | 0.2474 | 3 | 3 | 58 |
| -235.2405 | -127.7252 | 123.1321 | 0.2474 | 3 | 3 | 59 |
| -235.2405 | -127.7252 | 129.9728 | 0.2474 | 3 | 0 | 60 |

Sources: 3

Pulse No., Voltage Magnitude, Phase (Degrees): 1, 937.4, -50.1

Pulse No., Voltage Magnitude, Phase (Degrees): 21, 945.6, 62.4

Pulse No., Voltage Magnitude, Phase (Degrees): 41, 169.8, -172.3

Number of Loads: 0

EXHIBIT II

KMON NIGHT DA ARRAY

```

***** SOURCE DATA *****
Pulse 1      Voltage = (600.9812, -719.3486j)
              Current = (-4.1367, -6.0642j)
              Impedance = (34.818, 122.854j)
              Power = 938.1 Watts

Pulse 21     Voltage = (438.0614, 837.9675j)
              Current = (15.3629, 0.7631j)
              Impedance = (31.147, 52.998j)
              Power = 3684.67 Watts

Pulse 41     Voltage = (-168.3232, -22.6901j)
              Current = (-5.4126, 6.9022j)
              Impedance = (9.806, 16.697j)
              Power = 377.23 Watts

Total Power = 5000.000 Watts

```

```

***** CURRENT DATA *****

Wire No. 1 :
Pulse      Real      Imaginary   Magnitude   Phase
No.        (Amps)      (Amps)      (Amps)      (Degrees)
1          -4.1367    -6.0642     7.3408      -124.2998
2          -4.4456    -6.3148     7.7227      -125.1452
3          -4.6205    -6.4387     7.925       -125.6639
4          -4.7319    -6.4947     8.0356      -126.0763
5          -4.7896    -6.4913     8.067       -126.4217
6          -4.7979    -6.4324     8.0247      -126.7193
7          -4.7592    -6.3202     7.9118      -126.9803
8          -4.6753    -6.1568     7.7308      -127.2122
9          -4.5477    -5.9437     7.4839      -127.4204
10         -4.3777    -5.6828     7.1735      -127.6088
11         -4.1669    -5.3758     6.8016      -127.7806
12         -3.9168    -5.0245     6.3708      -127.9381
13         -3.629     -4.631      5.8836      -128.0835
14         -3.3051    -4.1973     5.3424      -128.2184
15         -2.9467    -3.7252     4.7497      -128.3443
16         -2.555     -3.2164     4.1077      -128.4625
17         -2.1312    -2.6721     3.4179      -128.574
18         -1.6751    -2.0923     2.6802      -128.6801
19         -1.1844    -1.474      1.8909      -128.7819
20         -0.6504    -0.8066     1.0361      -128.8812
E          0.0       0.0         0.0         0.0

```

EXHIBIT II

KMON NIGHT DA ARRAY

Wire No. 2 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 21 | 15.3629 | 0.7631 | 15.3819 | 2.8436 |
| 22 | 15.6923 | 0.5654 | 15.7025 | 2.0634 |
| 23 | 15.8049 | 0.43 | 15.8108 | 1.5586 |
| 24 | 15.7833 | 0.3144 | 15.7864 | 1.1412 |
| 25 | 15.6397 | 0.2127 | 15.6412 | 0.7792 |
| 26 | 15.3804 | 0.1228 | 15.3809 | 0.4574 |
| 27 | 15.0096 | 0.0436 | 15.0097 | 0.1665 |
| 28 | 14.5312 | -0.0252 | 14.5312 | -0.0995 |
| 29 | 13.9487 | -0.084 | 13.949 | -0.345 |
| 30 | 13.2663 | -0.1328 | 13.267 | -0.5734 |
| 31 | 12.4882 | -0.1716 | 12.4894 | -0.7872 |
| 32 | 11.6187 | -0.2005 | 11.6204 | -0.9886 |
| 33 | 10.6625 | -0.2195 | 10.6648 | -1.1794 |
| 34 | 9.6242 | -0.2287 | 9.6269 | -1.361 |
| 35 | 8.5084 | -0.2279 | 8.5115 | -1.5346 |
| 36 | 7.319 | -0.2174 | 7.3222 | -1.7014 |
| 37 | 6.0587 | -0.197 | 6.0619 | -1.8625 |
| 38 | 4.7276 | -0.1666 | 4.7305 | -2.0187 |
| 39 | 3.3195 | -0.1258 | 3.3218 | -2.1711 |
| 40 | 1.8103 | -0.0734 | 1.8118 | -2.3221 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

Wire No. 3 :

| Pulse No. | Real (Amps) | Imaginary (Amps) | Magnitude (Amps) | Phase (Degrees) |
|-----------|-------------|------------------|------------------|-----------------|
| 41 | -5.4126 | 6.9022 | 8.7713 | 128.1031 |
| 42 | -5.4062 | 6.9528 | 8.8073 | 127.8674 |
| 43 | -5.3651 | 6.9403 | 8.7722 | 127.7052 |
| 44 | -5.2914 | 6.8797 | 8.6792 | 127.5649 |
| 45 | -5.1859 | 6.7735 | 8.5308 | 127.4379 |
| 46 | -5.0493 | 6.6234 | 8.3286 | 127.3197 |
| 47 | -4.8826 | 6.4307 | 8.0743 | 127.2081 |
| 48 | -4.6867 | 6.1967 | 7.7695 | 127.1013 |
| 49 | -4.4629 | 5.9229 | 7.416 | 126.9981 |
| 50 | -4.2123 | 5.6108 | 7.016 | 126.8976 |
| 51 | -3.9364 | 5.2621 | 6.5715 | 126.7992 |
| 52 | -3.6368 | 4.8787 | 6.085 | 126.7022 |
| 53 | -3.3149 | 4.4624 | 5.5589 | 126.6063 |
| 54 | -2.9723 | 4.0152 | 4.9956 | 126.5111 |
| 55 | -2.6106 | 3.5388 | 4.3976 | 126.4162 |
| 56 | -2.2312 | 3.035 | 3.7668 | 126.3215 |
| 57 | -1.835 | 2.5047 | 3.1049 | 126.2268 |
| 58 | -1.4222 | 1.9481 | 2.412 | 126.1318 |
| 59 | -0.9914 | 1.3627 | 1.6851 | 126.0362 |
| 60 | -0.5357 | 0.7389 | 0.9127 | 125.9391 |
| E | 0.0 | 0.0 | 0.0 | 0.0 |

***** BASE OPERATING PARAMETERS *****

| Tr. | Ratio | Phase |
|-----|-------|--------|
| 1 | 0.477 | -127.1 |
| 2 | 1.000 | 0.0 |
| 3 | 0.570 | 125.3 |

FIGURE 1
TOWER #1 BASE CIRCUIT MODEL

WCAP - KMON TOWER #1 ND

WCAP - KMON-1

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

Node: 1 602.8617 \angle 40.8727° V
Node: 2 835.1154 \angle 56.9753° V
Node: 3 835.1099 \angle 56.9759° V

| WCAP PART | | | CURRENT IN | | CURRENT OUT | |
|-----------|-----|---------------|-----------------|-----------|----------------|------------|
| R | 2→3 | 0.00100000 | 0.01 \angle | 0.000° V | 10.00 \angle | 0.000° A |
| L | 3→1 | 8.72000000 | 305.69 \angle | 90.138° V | 9.96 \angle | 0.138° A |
| C | 1→0 | 0.00003000 | 602.86 \angle | 40.873° V | 0.06 \angle | 130.873° A |
| R | 1→0 | 45.46900000 | 602.86 \angle | 40.873° V | 10.00 \angle | -0.138° A |
| L | 3→0 | 5400.00000000 | 835.11 \angle | 56.976° V | 0.04 \angle | -33.024° A |

| WCAP PART | | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|-----|---------------|----------------|-----------|--------------|--------|
| R | 2→3 | 0.00100000 | 45.51 + j | 70.019 | 45.51 + j | 70.019 |
| L | 3→1 | 8.72000000 | 45.85 + j | 70.168 | 45.85 + j | 39.486 |
| C | 1→0 | 0.00003000 | 0.01 - j | 9473.509 | 0.00 + j | 0.000 |
| R | 1→0 | 45.46900000 | 45.47 + j | 39.541 | 0.00 + j | 0.000 |
| L | 3→0 | 5400.00000000 | 0.00 + j | 19000.352 | 0.00 + j | 0.000 |

| WCAP PART | VSWR |
|-----------|------|
| | |

WCAP INPUT DATA:

| | | | | |
|---|---------------|------------|---|-------------|
| | 0.5600 | 0.00100000 | 1 | |
| I | 10.00000000 | 0 | 2 | 0.00000000 |
| R | 0.00100000 | 2 | 3 | 0.00000000 |
| L | 8.72000000 | 3 | 1 | 0.00000000 |
| C | 0.00003000 | 1 | 0 | |
| R | 45.46900000 | 1 | 0 | 39.54100000 |
| L | 5400.00000000 | 3 | 0 | 0.00000000 |

Center Frequency: 0.56 MHz

Frequency Range: ± 0 kHz

Frequency Step: 1 kHz

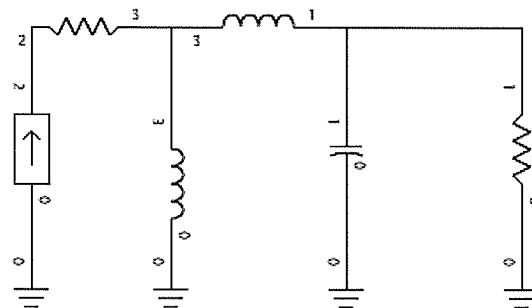


FIGURE 2
TOWER #2 BASE CIRCUIT MODEL

WCAP - KMON TOWER #2 ND

WCAP - KMON-2

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

| | | | |
|-------|---|-------------------|------------|
| Node: | 1 | 583.5962 \angle | 41.7344° V |
| Node: | 2 | 849.5380 \angle | 59.2214° V |
| Node: | 3 | 849.5329 \angle | 59.2219° V |

| WCAP PART | | | CURRENT IN | | CURRENT OUT | |
|-----------|-----|---------------|-----------------|-----------|----------------|------------|
| WCAP PART | | | BRANCH VOLTAGE | | BRANCH CURRENT | |
| R | 2→3 | 0.00100000 | 0.01 \angle | 0.000° V | 10.00 \angle | 0.000° A |
| L | 3→1 | 9.74000000 | 341.39 \angle | 90.132° V | 9.96 \angle | 0.132° A |
| C | 1→0 | 0.00003000 | 583.60 \angle | 41.734° V | 0.06 \angle | 131.734° A |
| R | 1→0 | 43.44900000 | 583.60 \angle | 41.734° V | 10.00 \angle | -0.132° A |
| L | 3→0 | 5400.00000000 | 849.53 \angle | 59.222° V | 0.04 \angle | -30.778° A |

| WCAP PART | | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|-----|---------------|----------------|-----------|--------------|--------|
| R | 2→3 | 0.00100000 | 43.47 + j | 72.988 | 43.47 + j | 72.988 |
| L | 3→1 | 9.74000000 | 43.81 + j | 73.169 | 43.81 + j | 38.898 |
| C | 1→0 | 0.00003000 | 0.00 - j | 9473.509 | 0.00 + j | 0.000 |
| R | 1→0 | 43.44900000 | 43.45 + j | 38.939 | 0.00 + j | 0.000 |
| L | 3→0 | 5400.00000000 | 0.00 + j | 19000.352 | 0.00 + j | 0.000 |

| WCAP PART | VSWR |
|-----------|------|
|-----------|------|

WCAP INPUT DATA:

| | | | | |
|---|---------------|------------|---|-------------|
| | 0.5600 | 0.00100000 | 1 | |
| I | 10.00000000 | 0 | 2 | 0.00000000 |
| R | 0.00100000 | 2 | 3 | 0.00000000 |
| L | 9.74000000 | 3 | 1 | 0.00000000 |
| C | 0.00003000 | 1 | 0 | |
| R | 43.44900000 | 1 | 0 | 38.93900000 |
| L | 5400.00000000 | 3 | 0 | 0.00000000 |

Center Frequency: 0.56 MHz

Frequency Range: ± 0 kHz

Frequency Step: 1 kHz

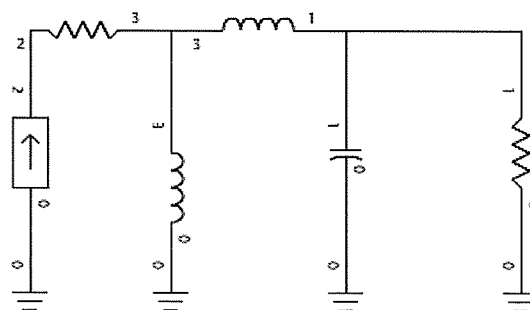


FIGURE 3
TOWER #3 BASE CIRCUIT MODEL

WCAP - KMON TOWER #3 ND

WCAP - KMON-3

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

| | | | |
|-------|---|-------------------|------------|
| Node: | 1 | 551.7655 \angle | 37.6936° V |
| Node: | 2 | 814.3790 \angle | 57.6463° V |
| Node: | 3 | 814.3736 \angle | 57.6469° V |

| WCAP PART | | | CURRENT IN | | CURRENT OUT | |
|-----------|----------------|---------------------------|----------------|------------|-------------|--|
| WCAP PART | BRANCH VOLTAGE | | BRANCH CURRENT | | | |
| R 2→3 | 0.00100000 | 0.01 \angle 0.000° V | 10.00 \angle | 0.000° A | | |
| L 3→1 | 10.00000000 | 350.59 \angle 90.132° V | 9.96 \angle | 0.132° A | | |
| C 1→0 | 0.00003000 | 551.77 \angle 37.694° V | 0.06 \angle | 127.694° A | | |
| R 1→0 | 43.58500000 | 551.77 \angle 37.694° V | 10.00 \angle | -0.133° A | | |
| L 3→0 | 5400.00000000 | 814.37 \angle 57.647° V | 0.04 \angle | -32.353° A | | |

| WCAP PART | | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|---------------|--------------------|----------------|--------|--------------|--|
| R 2→3 | 0.00100000 | 43.58 + j 68.796 | 43.58 + j | 68.796 | | |
| L 3→1 | 10.00000000 | 43.90 + j 68.944 | 43.90 + j | 33.759 | | |
| C 1→0 | 0.00003000 | 0.01 - j 9473.509 | 0.00 + j | 0.000 | | |
| R 1→0 | 43.58500000 | 43.59 + j 33.840 | 0.00 + j | 0.000 | | |
| L 3→0 | 5400.00000000 | 0.00 + j 19000.352 | 0.00 + j | 0.000 | | |

| WCAP PART | | VSWR | |
|------------------|---------------|------------|-------------|
| WCAP INPUT DATA: | | | |
| | 0.5600 | 0.00100000 | 1 |
| I | 10.00000000 | 0 2 | 0.00000000 |
| R | 0.00100000 | 2 3 | 0.00000000 |
| L | 10.00000000 | 3 1 | 0.00000000 |
| C | 0.00003000 | 1 0 | |
| R | 43.58500000 | 1 0 | 33.84000000 |
| L | 5400.00000000 | 3 0 | 0.00000000 |

Center Frequency: 0.56 MHz
Frequency Range: ± 0 kHz
Frequency Step: 1 kHz

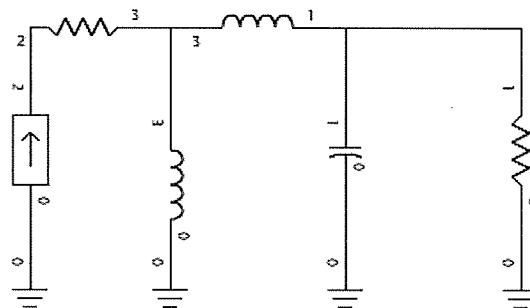


FIGURE 4
TOWER #1 BASE CIRCUIT MODEL - NIGHT DA PATTERN

WCAP - KMON TOWER #1 NIGHT DA

WCAP - KMON-1 DA

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

Node: 1 1283.2223 \angle 74.0703° V
Node: 2 1577.9597 \angle 77.1241° V
Node: 3 1577.9575 \angle 77.1245° V

| WCAP PART | | CURRENT IN | | CURRENT OUT | |
|-----------|-----|----------------|----------------------------|--------------------------|--|
| WCAP PART | | BRANCH VOLTAGE | | BRANCH CURRENT | |
| R | 2-3 | 0.00100000 | 0.01 \angle 0.000° V | 10.00 \angle 0.000° A | |
| L | 3-1 | 8.72000000 | 304.34 \angle 90.107° V | 9.92 \angle 0.107° A | |
| C | 1-0 | 0.00003000 | 1283.22 \angle 74.070° V | 0.14 \angle 164.070° A | |
| R | 1-0 | 34.81800000 | 1283.22 \angle 74.070° V | 10.05 \angle -0.106° A | |
| L | 3-0 | 5400.00000000 | 1577.96 \angle 77.124° V | 0.08 \angle -12.876° A | |

| WCAP PART | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|-----|----------------|--------------------|-------------------|--|
| R | 2-3 | 0.00100000 | 35.16 + j 153.828 | 35.16 + j 153.828 | |
| L | 3-1 | 8.72000000 | 35.74 + j 155.017 | 35.74 + j 124.335 | |
| C | 1-0 | 0.00003000 | 0.00 - j 9473.509 | 0.00 + j 0.000 | |
| R | 1-0 | 34.81800000 | 34.82 + j 122.854 | 0.00 + j 0.000 | |
| L | 3-0 | 5400.00000000 | 0.00 + j 19000.352 | 0.00 + j 0.000 | |

| WCAP PART | VSWR |
|-----------|------|
| | |

WCAP INPUT DATA:

| | | | |
|--------|---------------|---|---|
| 0.5600 | 0.00100000 | 1 | |
| I | 10.00000000 | 0 | 2 |
| R | 0.00100000 | 2 | 3 |
| L | 8.72000000 | 3 | 1 |
| C | 0.00003000 | 1 | 0 |
| R | 34.81800000 | 1 | 0 |
| L | 5400.00000000 | 3 | 0 |

Center Frequency: 0.56 MHz

Frequency Range: ± 0 kHz

Frequency Step: 1 kHz

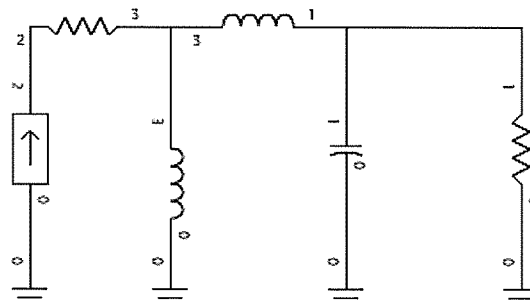


FIGURE 5
TOWER #2 BASE CIRCUIT MODEL - NIGHT DA PATTERN

WCAP - KMON TOWER #2 NIGHT DA

WCAP - KMON-2 DA

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

| | | | |
|-------|---|-------------------|------------|
| Node: | 1 | 615.4668 \angle | 59.4623° V |
| Node: | 2 | 891.9993 \angle | 69.5108° V |
| Node: | 3 | 891.9958 \angle | 69.5114° V |

| WCAP PART | | | CURRENT IN | | CURRENT OUT | |
|-----------|----------------|---------------------------|----------------|------------|-------------|--|
| WCAP PART | BRANCH VOLTAGE | | BRANCH CURRENT | | | |
| R 2→3 | 0.00100000 | 0.01 \angle 0.000° V | 10.00 \angle | 0.000° A | | |
| L 3→1 | 8.72000000 | 305.47 \angle 90.095° V | 9.96 \angle | 0.095° A | | |
| C 1→0 | 0.00003000 | 615.47 \angle 59.462° V | 0.06 \angle | 149.462° A | | |
| R 1→0 | 31.14700000 | 615.47 \angle 59.462° V | 10.01 \angle | -0.095° A | | |
| L 3→0 | 5400.00000000 | 892.00 \angle 69.511° V | 0.05 \angle | -20.489° A | | |

| WCAP PART | | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|---------------|---------------------|----------------|--------|--------------|--|
| R 2→3 | 0.00100000 | 31.22 + j 83.557 | 31.22 + j | 83.557 | | |
| L 3→1 | 8.72000000 | 31.50 + j 83.874 | 31.50 + j | 53.192 | | |
| C 1→0 | 0.00003000 | 0.00 - j 9473.509 | 0.00 + j | 0.000 | | |
| R 1→0 | 31.14700000 | 31.15 + j 52.998 | 0.00 + j | 0.000 | | |
| L 3→0 | 5400.00000000 | -0.00 + j 19000.352 | 0.00 + j | 0.000 | | |

| WCAP PART | VSWR |
|-----------|------|
|-----------|------|

WCAP INPUT DATA:

| | | |
|-----------------|------------|-------------|
| 0.5600 | 0.00100000 | 1 |
| I 10.00000000 | 0 2 | 0.00000000 |
| R 0.00100000 | 2 3 | 0.00000000 |
| L 8.72000000 | 3 1 | 0.00000000 |
| C 0.00003000 | 1 0 | |
| R 31.14700000 | 1 0 | 52.99800000 |
| L 5400.00000000 | 3 0 | 0.00000000 |

Center Frequency: 0.56 MHz

Frequency Range: ± 0 kHz

Frequency Step: 1 kHz

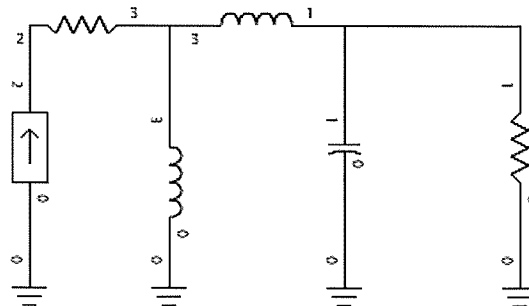


FIGURE 6
TOWER #3 BASE CIRCUIT MODEL - NIGHT DA PATTERN

WCAP - KMON TOWER #3 NIGHT DA

WCAP - KMON-3 DA

WCAP OUTPUT AT FREQUENCY: 0.560 MHz

NODE VOLTAGES

Node: 1 193.4947 \angle 59.5449° V
Node: 2 482.8882 \angle 78.2996° V
Node: 3 482.8862 \angle 78.3007° V

| WCAP PART | | | CURRENT IN | | CURRENT OUT | |
|-----------|-----|---------------|-----------------|-----------|----------------|------------|
| WCAP PART | | | BRANCH VOLTAGE | | BRANCH CURRENT | |
| R | 2-3 | 0.00100000 | 0.01 \angle | 0.000° V | 10.00 \angle | 0.000° A |
| L | 3-1 | 8.72000000 | 306.06 \angle | 90.030° V | 9.98 \angle | 0.030° A |
| C | 1-0 | 0.00003000 | 193.49 \angle | 59.545° V | 0.02 \angle | 149.545° A |
| R | 1-0 | 9.80600000 | 193.49 \angle | 59.545° V | 9.99 \angle | -0.030° A |
| L | 3-0 | 5400.00000000 | 482.89 \angle | 78.301° V | 0.03 \angle | -11.699° A |

| WCAP PART | | | FROM IMPEDANCE | | TO IMPEDANCE | |
|-----------|-----|---------------|----------------|-----------|--------------|--------|
| R | 2-3 | 0.00100000 | 9.79 + j | 47.285 | 9.79 + j | 47.285 |
| L | 3-1 | 8.72000000 | 9.84 + j | 47.398 | 9.84 + j | 16.716 |
| C | 1-0 | 0.00003000 | -0.01 - j | 9473.509 | 0.00 + j | 0.000 |
| R | 1-0 | 9.80600000 | 9.81 + j | 16.697 | 0.00 + j | 0.000 |
| L | 3-0 | 5400.00000000 | 0.00 + j | 19000.352 | 0.00 + j | 0.000 |

WCAP PART VSWR


WCAP INPUT DATA:

0.5600 0.00100000 1
I 10.00000000 0 2 0.00000000
R 0.00100000 2 3 0.00000000
L 8.72000000 3 1 0.00000000
C 0.00003000 1 0 0.00000000
R 9.80600000 1 0 16.69700000
L 5400.00000000 3 0 0.00000000

Center Frequency: 0.56 MHz

Frequency Range: \pm 0 kHz

Frequency Step: 1 kHz

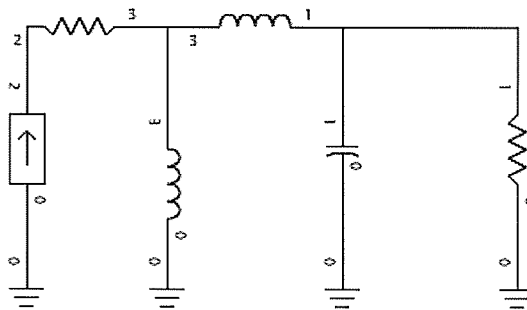

APPENDIX 1

KMON AM

5.4 KW Night DA

Reference Field Strength Measurements for M.O.M. LICENSING

AMENDED JULY 14, 2011

PI FIM-41 SN 699

| Radial | Point | Time | Distance | mV/m | Coordinates (WGS84) | Description |
|--------|-------|--------|----------|------|---------------------|--|
| 140.5 | 1 | 12:58p | 1.91 mi | 24.1 | 47° 24' 12.27" | West side Eden Rd by phone box |
| | 2 | 1:09p | 4.19 mi | 7.8 | 47° 22' 40.21" | South side of E. Hunter road by bush |
| | 3 | 1:16p | 5.5 mi | 8.3 | 47° 21' 47.68" | In driveway on north side of Red Butte Ln |
| 172 | 1 | 1:45p | 3.29 mi | 9.4 | 47° 22' 39.43" | North side of Ross Rd 200ft East of driveway |
| | 2 | 1:31p | 5.07 mi | 9.3 | 47° 21' 07.90" | West side of Eden Rd by curve sign |
| | 3 | 1:36p | 6.49 mi | 8.2 | 47° 19' 53.80" | South side of Eden Rd by 50 MPH curve sign |
| 245 | 1 | 1:59p | 3.3 mi | 3.5 | 47° 24' 15.51" | East side of Russel Ranch Ln at driveway |
| | 2 | 2:08p | 4.87 mi | 5.4 | 47° 23' 41.36" | West on Private Drive off Wilson Butte Road 150 yds |
| | 3 | 2:14p | 6.56 mi | 4.2 | 47° 23' 04.19" | West of top of hill, East of pasture entrance 200 ft |
| 276.5 | 1 | 11:20a | 1.75 mi | 34 | 47° 25' 39.20" | North side Fox Farm Ln 100ft South of fountain by tree |
| | 2 | 11:33a | 3.75 mi | 22.9 | 47° 25' 51.10" | North side Flood Rd at 4 mi marker |
| | 3 | 11:39a | 4.31 mi | 14 | 47° 25' 53.99" | South side Flood Rd by curve sign |
| 28.5 | 1 | 11:40a | 2.02 mi | 450 | 47° 27' 1.87" | In front of metal house, power pole #115 |
| | 2 | 11:53a | 3.1 mi | 330 | 47° 27' 54.52" | At curve on Highland road at driveway |
| | 3 | 11:59a | 3.75 mi | 242 | 47° 28' 20.3" | North side of Gibson Flats road by 2 metal markers |