

Law Office of
DENNIS J. KELLY
Post Office Box 41177
Washington, DC 20018

MEMBER, DISTRICT OF COLUMBIA BAR ONLY;
PRACTICE LIMITED TO FEDERAL COURTS AND AGENCIES

2012 OCT 23 4 342
TELEPHONE:

888-322-5291
202-293-2300

TELECOPIER:
E-MAIL:

571-312-1601
dkellyfcclaw1@comcast.net

October 16, 2012

FILED/ACCEPTED

Honorable Marlene H. Dortch
Office of the Secretary
Federal Communications Commission
Washington, DC 20554

OCT 16 2012

Federal Communications Commission
Office of the Secretary

Attention: Audio Division, Media Bureau

**RE: KCEO(AM), Vista, California
FCC Facility ID # 67666
Form 302-AM Application for License
to Cover File No. BP-20040109AAF**

Dear Madame Secretary:

On behalf of our client IHR Educational Broadcasting, licensee of non-commercial educational AM Broadcast Station KCEO, Vista, California, there is transmitted herewith in triplicate an application on FCC Form 302-AM for a license to cover the changes to the facilities of station KCEO constructed pursuant to a construction permit, File No. BP-20040109AAF, granted October 22, 2009. It is to be noted that, as constructed, the spacing for tower #4 turned out to be 89 degrees, rather than 86 degrees as stated in the construction permit. IHR Educational Broadcasting has today filed an FCC Form 301 application, Ref. No. 20121016AAR, to incorporate this change into the underlying construction permit.

Pursuant to Section 73.1620(a)(4) of the FCC's Rules, IHR Educational Broadcasting hereby respectfully requests program test authority to operate the new KCEO directional antenna system

As KCEO is a non-commercial educational station, this application is non-feeable pursuant to Section 1.1114(c) of the FCC's Rules.

Federal Communications Commission
October 16, 2012
Page Two

Should additional information be desired in connection with the above matter, kindly communicate with this office.

Very truly yours,

A handwritten signature in black ink, appearing to read "D. Kelly", written in a cursive style.

Dennis J. Kelly

FOR
FCC
USE
ONLY

FCC 302-AM
APPLICATION FOR AM
BROADCAST STATION LICENSE

(Please read instructions before filling out form.)

FOR COMMISSION USE ONLY

FILE NO.

BmmL-2012 10/16 ADQ

SECTION I - APPLICANT FEE INFORMATION

1. PAYOR NAME (Last, First, Middle Initial)

IHR EDUCATIONAL BROADCASTING

MAILING ADDRESS (Line 1) (Maximum 35 characters)

3256 Penryn Road, Suite 100

MAILING ADDRESS (Line 2) (Maximum 35 characters)

CITY
Loomis

STATE OR COUNTRY (if foreign address)
CA

ZIP CODE
95650-8052

TELEPHONE NUMBER (include area code)

866-774-3278

CALL LETTERS
KCEO

OTHER FCC IDENTIFIER (if applicable)
67666

2. A. Is a fee submitted with this application?

☐ Yes ☒ No

B. If No, indicate reason for fee exemption (see 47 C.F.R. Section

☐ Governmental Entity

☒ Noncommercial educational licensee

☐ Other (Please explain):

C. If Yes, provide the following information:

Enter in Column (A) the correct Fee Type Code for the service you are applying for. Fee Type Codes may be found in the "Mass Media Services Fee Filing Guide." Column (B) lists the Fee Multiple applicable for this application. Enter fee amount due in Column (C).

(A)		
FEE TYPE CODE		

(B)			
FEE MULTIPLE			
0	0	0	1

(C)
FEE DUE FOR FEE TYPE CODE IN COLUMN (A)
\$

FOR FCC USE ONLY

To be used only when you are requesting concurrent actions which result in a requirement to list more than one Fee Type Code.

(A)		

(B)			
0	0	0	1

(C)
\$

FOR FCC USE ONLY

ADD ALL AMOUNTS SHOWN IN COLUMN C,
AND ENTER THE TOTAL HERE.
THIS AMOUNT SHOULD EQUAL YOUR ENCLOSED
REMITTANCE.

TOTAL AMOUNT REMITTED WITH THIS APPLICATION
\$

FOR FCC USE ONLY

SECTION II - APPLICANT INFORMATION			
1. NAME OF APPLICANT			
MAILING ADDRESS 3256 Penryn Road, Suite 100			
CITY	Loomis	STATE	CA
		ZIP CODE	95650

2. This application is for:

☐ Commercial
 ☒ Noncommercial
☒ AM Directional
 ☐ AM Non-Directional

Call letters KCEO	Community of License Vista, CA	Construction Permit File No. BP-20040109AAF	Modification of Construction Permit File No(s).	Expiration Date of Last Construction Permit 10/22/2012
----------------------	-----------------------------------	--	--	--

3. Is the station now operating pursuant to automatic program test authority in accordance with 47 C.F.R. Section 73.1620?

☐ Yes ☒ No

PROGRAM TEST AUTHORITY REQUESTED

If No, explain in an Exhibit.

Exhibit No.

4. Have all the terms, conditions, and obligations set forth in the above described construction permit been fully met?

☒ Yes ☐ No

If No, state exceptions in an Exhibit.

Exhibit No.

5. Apart from the changes already reported, has any cause or circumstance arisen since the grant of the underlying construction permit which would result in any statement or representation contained in the construction permit application to be now incorrect?

☒ Yes ☐ No

If Yes, explain in an Exhibit. BUT SEE ENGINEERING STATEMENT

Exhibit No.

6. Has the permittee filed its Ownership Report (FCC Form 323) or ownership certification in accordance with 47 C.F.R. Section 73.3615(b)?

☐ Yes ☐ No

☒ Does not apply

If No, explain in an Exhibit.

Exhibit No.

7. Has an adverse finding been made or an adverse final action been taken by any court or administrative body with respect to the applicant or parties to the application in a civil or criminal proceeding, brought under the provisions of any law relating to the following: any felony; mass media related antitrust or unfair competition; fraudulent statements to another governmental unit; or discrimination?

☐ Yes ☒ No

If the answer is Yes, attach as an Exhibit a full disclosure of the persons and matters involved, including an identification of the court or administrative body and the proceeding (by dates and file numbers), and the disposition of the litigation. Where the requisite information has been earlier disclosed in connection with another application or as required by 47 U.S.C. Section 1.65(c), the applicant need only provide: (i) an identification of that previous submission by reference to the file number in the case of an application, the call letters of the station regarding which the application or Section 1.65 information was filed, and the date of filing; and (ii) the disposition of the previously reported matter.

Exhibit No.

8. Does the applicant, or any party to the application, have a petition on file to migrate to the expanded band (1605-1705 kHz) or a permit or license either in the existing band or expanded band that is held in combination (pursuant to the 5 year holding period allowed) with the AM facility proposed to be modified herein?

☐ Yes ☒ No

If Yes, provide particulars as an Exhibit.

Exhibit No.

The APPLICANT hereby waives any claim to the use of any particular frequency or of the electromagnetic spectrum as against the regulatory power of the United States because use of the same, whether by license or otherwise, and requests and authorization in accordance with this application. (See Section 304 of the Communications Act of 1934, as amended).


The APPLICANT acknowledges that all the statements made in this application and attached exhibits are considered material representations and that all the exhibits are a material part hereof and are incorporated herein as set out in full in

CERTIFICATION

1. By checking Yes, the applicant certifies, that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. Section 862, or, in the case of a non-individual applicant (e.g., corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits that includes FCC benefits pursuant to that section. For the definition of a "party" for these purposes, see 47 C.F.R. Section 1.2002(b).

☒ Yes ☐ No

2. I certify that the statements in this application are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.

Name DOUGLAS M. SHERMAN	Signature 	
Title President	Date 10/15/2012	Telephone Number 866-774-3278

**WILLFUL FALSE STATEMENTS ON THIS FORM ARE PUNISHABLE BY FINE AND/OR IMPRISONMENT
(U.S. CODE, TITLE 18, SECTION 1001), AND/OR REVOCATION OF ANY STATION LICENSE OR
CONSTRUCTION**

FCC NOTICE TO INDIVIDUALS REQUIRED BY THE PRIVACY ACT AND THE PAPERWORK REDUCTION ACT

The solicitation of personal information requested in this application is authorized by the Communications Act of 1934, as amended. The Commission will use the information provided in this form to determine whether grant of the application is in the public interest. In reaching that determination, or for law enforcement purposes, it may become necessary to refer personal information contained in this form to another government agency. In addition, all information provided in this form will be available for public inspection. If information requested on the form is not provided, the application may be returned without action having been taken upon it or its processing may be delayed while a request is made to provide the missing information. Your response is required to obtain the requested authorization.

Public reporting burden for this collection of information is estimated to average 639 hours and 53 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, can be sent to the Federal Communications Commission, Records Management Branch, Paperwork Reduction Project (3060-0627), Washington, D. C. 20554. Do NOT send completed forms to this address.

THE FOREGOING NOTICE IS REQUIRED BY THE PRIVACY ACT OF 1974, P.L. 93-579, DECEMBER 31, 1974, 5 U.S.C. 552a(e)(3), AND THE PAPERWORK REDUCTION ACT OF 1980, P.L. 96-511, DECEMBER 11, 1980, 44 U.S.C. 3507.

SECTION III - LICENSE APPLICATION ENGINEERING DATA

Name of Applicant

IHR Educational Broadcasting

PURPOSE OF AUTHORIZATION APPLIED FOR: (check one)



Station License



Direct Measurement of Power

1. Facilities authorized in construction permit					
Call Sign KCEO	File No. of Construction Permit (if applicable) BP-20040109AAF	Frequency (kHz) 1000	Hours of Operation Unlimited	Power in kilowatts Night 0.9 Day 5.0	
2. Station location					
State California			City or Town Vista		
3. Transmitter location					
State CA	County San Diego	City or Town Oceanside		Street address (or other identification) 2766 North Santa Fe Avenue	
4. Main studio location					
State CA	County Placer	City or Town Loomis		Street address (or other identification) 3256 Penryn Rd, Suite 100	
5. Remote control point location (specify only if authorized directional antenna)					
State CA	County Placer	City or Town Loomis		Street address (or other identification) 3256 Penryn Rd, Suite 100	

6. Has type-approved stereo generating equipment been installed?



Yes



No

7. Does the sampling system meet the requirements of 47 C.F.R. Section 73.68?



Yes



No



Not Applicable

Attach as an Exhibit a detailed description of the sampling system as installed.

Exhibit No.
EE

8. Operating constants:						
RF common point or antenna current (in amperes) without modulation for night system 4.41			RF common point or antenna current (in amperes) without modulation for day system 10.39			
Measured antenna or common point resistance (in ohms) at operating frequency Night 50 Day 50			Measured antenna or common point reactance (in ohms) at operating frequency Night 0 Day 0			
Antenna indications for directional operation						
Towers	Antenna monitor Phase reading(s) in degrees		Antenna monitor sample current ratio(s)		Antenna base currents	
	Night	Day	Night	Day	Night	Day
1 (S) ASRN 1046152	-146.6°	-112.9°	88.6%	59.1%		
2 (C) ASRN 1046150	0°	0°	100.0%	100.0%		
3 (N) ASRN 1046151	+128.9°	-1.7°	48.4%	51.0%		
4 (W) ASRN 1046153	-108.7°	-108.9°	40.6%	52.7%		
Manufacturer and type of antenna monitor: Potomac Instruments AM-19 (204) s/n 1570						

SECTION III - Page 2

9. Description of antenna system ((f directional antenna is used, the information requested below should be given for each element of the array. Use separate sheets if necessary.)

Type Radiator Vertical uniform cross section insulated guyed towers	Overall height in meters of radiator above base insulator, or above base, if grounded. 76.3	Overall height in meters above ground (without obstruction lighting) 1: 77.1 2: 76.5 3: 77.9 4: 77.7	Overall height in meters above ground (include obstruction lighting) 1: 78.0 2: 77.4 3: 78.6 4: 78.0	If antenna is either top loaded or sectionalized, describe fully in an Exhibit. <div>Exhibit No. n/a</div>
---	--	--	--	--

Excitation ☒ Series ☐ Shunt **This is a method of moments antenna proof.**

Geographic coordinates to nearest second. For directional antenna give coordinates of center of array. For single vertical radiator give tower location.

North Latitude 33 ° 13 ' 58 "	West Longitude 117 ° 16 ' 11 "
--	---

If not fully described above, attach as an Exhibit further details and dimensions including any other antenna mounted on tower and associated isolation circuits.

Exhibit No.
n/a

Also, if necessary for a complete description, attach as an Exhibit a sketch of the details and dimensions of ground system.

Exhibit No.
EE


10. In what respect, if any, does the apparatus constructed differ from that described in the application for construction permit or in the permit?

Tower 4 ground system radials shortened slightly at west property line. Tower 4 spacing changed to 89°.

11. Give reasons for the change in antenna or common point resistance.

Reconfiguration of phasing system to implement construction permit.

I certify that I represent the applicant in the capacity indicated below and that I have examined the foregoing statement of technical information and that it is true to the best of my knowledge and belief.

Name (Please Print or Type) Mark A. Mueller	Signature (che 
Address (include ZIP Code) Mueller Broadcast Design 613 S. La Grange Rd. La Grange, IL 60525	Date October 13, 2012
	Telephone No. (Include Area Code) (708) 352-2166

☐ Technical Director

☐ **mark@muellerbroadcastdesign.com**
Registered Professional Engineer

☐ Chief Operator

☒ Technical Consultant

☐ Other (specify)

**Engineering Report For
IHR Educational Broadcasting
K C E O (A M)
Vista, California
October 2012**

This engineering report documents the Directional Antenna Performance Verification measurements for KCEO (AM), FCC facility ID number 67666, Vista, California. KCEO is authorized to operate on 1000 KHz with 5 KW using a four tower directional antenna daytime and 0.9 KW nighttime using the same four towers with a different pattern. This Verification is for the new facility authorized by BP-20040109AAF and documents the required “model proof” in order to grant the covering license. All measurements were made personally by the writer in accordance with the FCC rules at 47 CFR 73.151(c).

Eligibility for 73.151(c) Processing

The KCEO antenna system consists of four conventional uniform cross-section insulated steel radiators, series-fed with no top loading. They are 91.5° tall at the KCEO frequency (1000 KHz) and are sampled at the base using Delta TCT-3 toroidal current transformers. The ground system is of standard design, consisting of 120 equally-spaced buried bare copper wire radials around each tower 75 meters long (90°) except for those which intersect or where they encounter a property boundary, with 4” copper straps terminating the radial intersections and interconnecting the towers. A 4” strap interconnects the towers to each other and to the phasor and transmitter.

Background

The previously licensed KCEO antenna system used towers 1-3, and the fourth (west) tower was added in accordance with the construction permit. The antenna current sample elements are Delta Electronics TCT-3 current transformers and are located at the input to the series filters. There are no shunt elements between the filter and the tower except for the tower

lighting choke which presents a very high impedance (more than 10 times the tower impedance) at 1000 KHz. Equal lengths of Andrew 3/8" LDF2-50J Heliax foam coaxial cable are used as sample lines. A Potomac Instruments AM-19 (204) antenna monitor is used to keep tabs on the array. The monitor was refurbished, recalibrated and checked for proper operation in accordance with the manufacturer's instructions.

Measurements

The KCEO system was modeled using Westberg Consulting's Phasor Professional 2.1.1 which calculates the tower matrix values as well as the proper operating parameters. The towers and sample lines were measured and documented using an Array Solutions PowerAIM-120 network analyzer serial number 1019 operated in accordance with the manufacturer's instructions. This analyzer has been used in several recent projects and exhibits excellent stability and field performance and since it operates "floating" via battery power and a Bluetooth radio connection to the associated computer no RF ground loop issues arise.

The four KCEO towers are essentially identical and are base sampled using toroidal current transformers. Each tower was disconnected from its ATU at the sample transformer and was measured at that point. The other towers were individually shorted and/or left floating for each measurement as required, plus additional measurements with the subject tower base insulator shorted to measure the feedline impedance and electrical length from the ATU to the tower as well as at the tower itself with the ATU disconnected. These measurements are documented below and show good agreement with the Westberg theoretical numbers.

The physical tower survey turned up a discrepancy of +3° for the tower 4 spacing, 89° instead of 86°. The underlying CP is being modified to account for this difference and this report has been generated using the slightly modified nighttime parameters reflected in the CP Mod. These are less than +/-5% and +/-3° from the original construction permit.

Theoretical Data:

TOWER MODEL INFORMATION

TOWER INFORMATION						
	Tower Height (')	Spacing (')	Orientation	Face Width (in.)	Radius (in.)	Velocity Factor
Tower 1	91.5000	80.0000	190.0000	12.0000 / 12.0000	5.5426 / 5.5426	0.960000
Tower 2	91.5000	0.0000	0.0000	12.0000 / 12.0000	5.5426 / 5.5426	0.935000
Tower 3	91.5000	80.0000	10.0000	12.0000 / 12.0000	5.5426 / 5.5426	0.955000
Tower 4	91.5000	89.0000	280.0000	12.0000 / 12.0000	5.5426 / 5.5426	0.955000

MATRIX INFORMATION [47 CFR 73.151(c)(1)]

MATRIX INFORMATION		
	Impedance (other towers open)	Impedance (measured)
Tower 1	47.75 + j54.03	47.2 + j56.8
Tower 2	49.77 + j67.54	49.2 + j67.7
Tower 3	48.65 + j57.19	48.4 + j54.4
Tower 4	47.33 + j57.87	45.6 + j54.6

The Westberg Phasor Professional method-of-moments model fully complies with all FCC requirements for tower radius, height, segment length, and calculation references points. No shunt capacitance was used. Towers were adjusted by varying the propagation velocity as shown above. The measured impedances agree with the model within +/- 2 ohms +/- 4%. Westberg's Phasor Professional uses a single wire of the desired effective radius divided into segments or no more than 10° electrical length each to model the tower.

DETUNED TOWER CURRENTS from Westberg Phasor Professional

Tower 1
0.000000 > 0.000000 - 91.50° above ground
0.090992 > -115.890866 - 82.35° above ground
0.143907 > -116.574350 - 73.20° above ground
0.168770 > -117.307866 - 64.05° above ground
0.165106 > -118.136794 - 54.90° above ground
0.132096 > -119.232902 - 45.75° above ground
0.069031 > -121.742384 - 36.60° above ground
0.025568 > 72.620465 - 27.45° above ground
0.151289 > 63.106710 - 18.30° above ground
0.313055 > 61.756062 - 9.15° above ground
0.560415 > 60.962054 - -0.00° above ground
Tower 2
0.000000 > 0.000000 - 91.50° above ground
0.094482 > -114.455411 - 82.35° above ground
0.149703 > -115.222040 - 73.20° above ground
0.175822 > -116.082765 - 64.05° above ground
0.172243 > -117.095128 - 54.90° above ground
0.138033 > -118.478591 - 45.75° above ground
0.072420 > -121.695838 - 36.60° above ground
0.026718 > 76.860388 - 27.45° above ground
0.157726 > 64.498451 - 18.30° above ground
0.326623 > 62.708147 - 9.15° above ground
0.584158 > 61.629914 - -0.00° above ground

Tower 3
0.000000 > 0.000000 - 91.50° above ground
0.064042 > 167.562509 - 82.35° above ground
0.100836 > 168.081352 - 73.20° above ground
0.117670 > 168.613970 - 64.05° above ground
0.114435 > 169.215678 - 54.90° above ground
0.090798 > 170.037339 - 45.75° above ground
0.046494 > 172.023904 - 36.60° above ground
0.019052 > -18.495409 - 27.45° above ground
0.105871 > -11.755116 - 18.30° above ground
0.216756 > -10.695327 - 9.15° above ground
0.385361 > -10.036739 - -0.00° above ground
Tower 4
0.000000 > 0.000000 - 91.50° above ground
0.074838 > -154.171266 - 82.35° above ground
0.118379 > -154.036659 - 73.20° above ground
0.138817 > -153.919455 - 64.05° above ground
0.135752 > -153.804879 - 54.90° above ground
0.108519 > -153.664590 - 45.75° above ground
0.056521 > -153.345975 - 36.60° above ground
0.020805 > 24.801524 - 27.45° above ground
0.124472 > 26.021686 - 18.30° above ground
0.257387 > 26.191242 - 9.15° above ground
0.460327 > 26.290602 - -0.00° above ground

MATRIX CALCULATIONS from Westberg Phasor Professional

ZMatrix			
47.75 + j54.03	28.37 - j19.43	-8.21 - j23.47	9.10 - j26.43
28.37 - j19.43	49.77 + j67.54	28.63 - j19.64	23.53 - j23.23
-8.21 - j23.47	28.63 - j19.64	48.65 + j57.19	9.15 - j26.70
9.10 - j26.43	23.53 - j23.23	9.15 - j26.70	47.33 + j57.87

YMatrix			
0.006934 - j0.008148	0.002381 + j0.004261	0.000775 + j0.000331	0.002225 + j0.002143
0.002381 + j0.004261	0.002143 - j0.006983	0.002373 + j0.004116	0.001427 + j0.003831
0.000775 + j0.000331	0.002373 + j0.004116	0.006579 - j0.007952	0.002193 + j0.002055
0.002225 + j0.002143	0.001427 + j0.003831	0.002193 + j0.002055	0.006374 - j0.007325

HMatrix - [I] = [H] X [F]			
0.017732 + j0.001371	0.000391 + j0.000871	0.000649 - j0.000064	0.000670 + j0.000398
0.000405 + j0.000912	0.016827 + j0.001428	0.000405 + j0.000912	0.000501 + j0.000805
0.000655 - j0.000064	0.000394 + j0.000878	0.017552 + j0.001382	0.000676 + j0.000401
0.000676 + j0.000402	0.000486 + j0.000776	0.000676 + j0.000401	0.017552 + j0.001384

HMatrix-inverse - [F] = [H] ⁻¹ X [I]			
56.126024 - j4.155045	-1.612424 - j2.456223	-2.023893 + j0.738981	-2.269381 - j0.773271
-1.674806 - j2.575263	58.812231 - j4.538407	-1.696376 - j2.598407	-2.043294 - j2.130865
-2.042668 + j0.746086	-1.645604 - j2.501733	56.687888 - j4.273285	-2.314319 - j0.784301
-2.291095 - j0.780732	-1.977639 - j2.052895	-2.315390 - j0.784611	56.747569 - j4.159238

Tower Currents

Mode 1 - Daytime
Tower 1
0.000000 > 0.000000 - 91.50° above ground
1.002106 > -125.454220 - 82.35° above ground
1.820211 > -124.810351 - 73.20° above ground
2.544535 > -124.108545 - 64.05° above ground
3.169191 > -123.320438 - 54.90° above ground
3.683612 > -122.417318 - 45.75° above ground
4.076698 > -121.360609 - 36.60° above ground
4.338628 > -120.093084 - 27.45° above ground
4.461088 > -118.519819 - 18.30° above ground
4.436281 > -116.464330 - 9.15° above ground
4.209525 > -112.942826 - -0.00° above ground
Tower 2
0.000000 > 0.000000 - 91.50° above ground
1.445858 > -5.706299 - 82.35° above ground
2.657395 > -5.283132 - 73.20° above ground
3.758943 > -4.850123 - 64.05° above ground
4.740076 > -4.396392 - 54.90° above ground
5.583456 > -3.912733 - 45.75° above ground
6.270747 > -3.386680 - 36.60° above ground
6.785302 > -2.799717 - 27.45° above ground
7.112901 > -2.121509 - 18.30° above ground
7.241154 > -1.297020 - 9.15° above ground
7.124170 > 0.000000 - -0.00° above ground

Mode 2 - Nighttime
Tower 1
0.000000 > 0.000000 - 91.50° above ground
0.969377 > -150.959477 - 82.35° above ground
1.765067 > -150.728330 - 73.20° above ground
2.473752 > -150.477999 - 64.05° above ground
3.089387 > -150.198612 - 54.90° above ground
3.601244 > -149.880473 - 45.75° above ground
3.997880 > -149.510740 - 36.60° above ground
4.268829 > -149.070482 - 27.45° above ground
4.404701 > -148.528309 - 18.30° above ground
4.395874 > -147.825710 - 9.15° above ground
4.185738 > -146.631962 - -0.00° above ground
Tower 2
0.000000 > 0.000000 - 91.50° above ground
1.061934 > -1.125353 - 82.35° above ground
1.942106 > -1.030268 - 73.20° above ground
2.732105 > -0.935990 - 64.05° above ground
3.423695 > -0.840420 - 54.90° above ground
4.003574 > -0.741931 - 45.75° above ground
4.457785 > -0.638234 - 36.60° above ground
4.773614 > -0.525770 - 27.45° above ground
4.939777 > -0.398490 - 18.30° above ground
4.945052 > -0.245017 - 9.15° above ground
4.729476 > -0.000000 - -0.00° above ground

Tower 3
0.000000 > 0.000000 - 91.50° above ground
0.756506 > -10.840967 - 82.35° above ground
1.382714 > -10.246327 - 73.20° above ground
1.946707 > -9.621095 - 64.05° above ground
2.444815 > -8.946203 - 54.90° above ground
2.869718 > -8.204682 - 45.75° above ground
3.213470 > -7.374355 - 36.60° above ground
3.468865 > -6.423027 - 27.45° above ground
3.629811 > -5.298384 - 18.30° above ground
3.691112 > -3.905775 - 9.15° above ground
3.630934 > -1.680969 - -0.00° above ground
Tower 4
0.000000 > 0.000000 - 91.50° above ground
0.925017 > -122.817042 - 82.35° above ground
1.676902 > -122.103990 - 73.20° above ground
2.339042 > -121.326151 - 64.05° above ground
2.906064 > -120.451507 - 54.90° above ground
3.368352 > -119.446964 - 45.75° above ground
3.715896 > -118.267498 - 36.60° above ground
3.939959 > -116.845782 - 27.45° above ground
4.033258 > -115.069529 - 18.30° above ground
3.988998 > -112.728700 - 9.15° above ground
3.753515 > -108.668043 - -0.00° above ground

Tower 3
0.000000 > 0.000000 - 91.50° above ground
0.458741 > 122.408539 - 82.35° above ground
0.843689 > 122.909550 - 73.20° above ground
1.194551 > 123.415857 - 64.05° above ground
1.507940 > 123.940708 - 54.90° above ground
1.778224 > 124.495227 - 45.75° above ground
1.999420 > 125.094271 - 36.60° above ground
2.166075 > 125.759542 - 27.45° above ground
2.273536 > 126.526049 - 18.30° above ground
2.317816 > 127.456448 - 9.15° above ground
2.285053 > 128.920795 - -0.00° above ground
Tower 4
0.000000 > 0.000000 - 91.50° above ground
0.440098 > -112.872339 - 82.35° above ground
0.801750 > -112.671016 - 73.20° above ground
1.124216 > -112.445678 - 64.05° above ground
1.404786 > -112.186617 - 54.90° above ground
1.638630 > -111.884074 - 45.75° above ground
1.820596 > -111.525258 - 36.60° above ground
1.945976 > -111.091416 - 27.45° above ground
2.010562 > -110.551482 - 18.30° above ground
2.010092 > -109.847525 - 9.15° above ground
1.919999 > -108.650413 - -0.00° above ground

TOWER DRIVE INFORMATION – DAY

	Field Ratios	Field Phase	Drive Imped. (Ω)	Current	Antenna Monitor*	Power (W)
Tower 1	0.6260	-117.4000	90.60 + j88.95	4.21 \angle -112.94	59.1% \angle -112.9°	1605.3856
Tower 2	1.0000	0.0000	31.40 + j37.41	7.12 \angle 0.00	100.0% \angle 0.0°	1593.4906
Tower 3	0.5020	-3.7000	54.85 + j37.00	3.63 \angle -1.68	51.0% \angle -1.7°	723.2176
Tower 4	0.5720	-114.2000	104.90 + j103.20	3.75 \angle -108.67	52.7% \angle -108.9°	1477.9063

TOWER DRIVE INFORMATION – NIGHT

	Field Ratios	Field Phase	Drive Imped. (Ω)	Current	Antenna Monitor*	Power (W)
Tower 1	0.8730	-148.6000	30.61 + j86.24	4.19 \angle -146.63	88.6% \angle -146.6°	536.3636
Tower 2	1.0000	0.0000	6.05 + j78.78	4.73 \angle 0.00	100.0% \angle 0.0°	135.3811
Tower 3	0.4430	126.1000	35.94 + j36.02	2.29 \angle 128.92	48.4% \angle 128.9°	187.6854
Tower 4	0.4000	-110.6000	30.54 + j81.30	1.92 \angle -108.65	40.6% \angle -108.7°	112.5699

* = These are the pattern parameters used to tune the array and are on the Form 302.

Sample System Verification [47 CFR 73.151(c)(2)]

Sample Lines: Andrew 3/8" LDF2-50J foam dielectric Heliax coaxial cable
88% velocity factor, 50 +/-1 ohms

Lines were cut to equal electrical length and terminated with proper connectors. An additional short (one foot) flexible cable connects the 3/8" Heliax to the antenna monitor. These jumpers are identical and are accounted for in the data which follows.

Sample Element Type: Delta Electronics TCT-3 Toroidal Current Transformers

Location: At output of antenna tuning network on lead to tower.

Operating Potential: Grounded

Antenna Monitor: Potomac Instruments AM-19 (204) s/n 1570

TCT-3 Serial Numbers & Z at 1000 KHz:

Tower 1 (S):	2019	49.7 +j3.3 ohms
Tower 2 (C):	2003	50.1 +j2.8 ohms
Tower 3 (N):	1986	49.8 +j2.9 ohms
Tower 4 (W):	1919	49.9 +j2.6 ohms

(Current Transformers are matched 0.4 ohm resistance and j0.7 ohms reactance)

TCT-3 Phase and Ratio Test (Tower 2 is reference):

Tower 1: 1.000/ +0.5°

Tower 3: 0.990/ +0.3°

Tower 4: 1.000/ +0.5°

(Current Transformers are matched within 0.1% ratio and 0.5° phase)

The phase and ratio calibration test was done with transformers removed from the ACUs and configured in pairs with the #2 transformer adjacent to each other reading RF current to tower #2 in night pattern at 250 watts. The cables used to connect the TCTs to the monitor are identical in electrical length and characteristic impedance and are maintained by the writer for this purpose.

Sample Line Length Test (see graph data which follows):

Tower 1 Closest Odd ¼ wave Resonant Frequency: 1.062111 MHz (611.46 feet)
254.21° at 1000 KHz

Tower 2 Closest Odd ¼ wave Resonant Frequency: 1.061915 MHz (611.57 feet)
254.26° at 1000 KHz

Tower 3 Closest Odd ¼ wave Resonant Frequency: 1.060435 MHz (612.43 feet)
254.62° at 1000 KHz

Tower 4 Closest Odd ¼ wave Resonant Frequency: 1.062329 MHz (611.34 feet)
254.16° at 1000 KHz

Maximum Difference in Electrical Length: 1.09 feet, 0.45° at 1000 KHz

Sample Line Impedance Test (see graph data which follows):

Tower 1 Sample Line Mean Zmag:	51.2880 ohms
Tower 2 Sample Line Mean Zmag:	50.6772 ohms
Tower 3 Sample Line Mean Zmag:	50.1409 ohms
Tower 4 Sample Line Mean Zmag:	50.2305 ohms

Maximum Variation in Sample Line Impedance: 1.1471 ohms


Sample Impedance From Monitor End (with sample element connected, see graph data):

Tower 1 (South) Sample Impedance:	52.656 -j2.701 ohms
Tower 2 (Center) Sample Impedance:	53.527 -j3.056ohms
Tower 3 (North) Sample Impedance:	52.749 -j2.479 ohms
Tower 4 (West) Sample Impedance:	52.736 -j2.879 ohms

Maximum Variation in Sample Resistance: 0.871 ohms

Maximum Variation in Sample Reactance: j0.577 ohms

Tower 1 (South) Sample Line (open circuit)

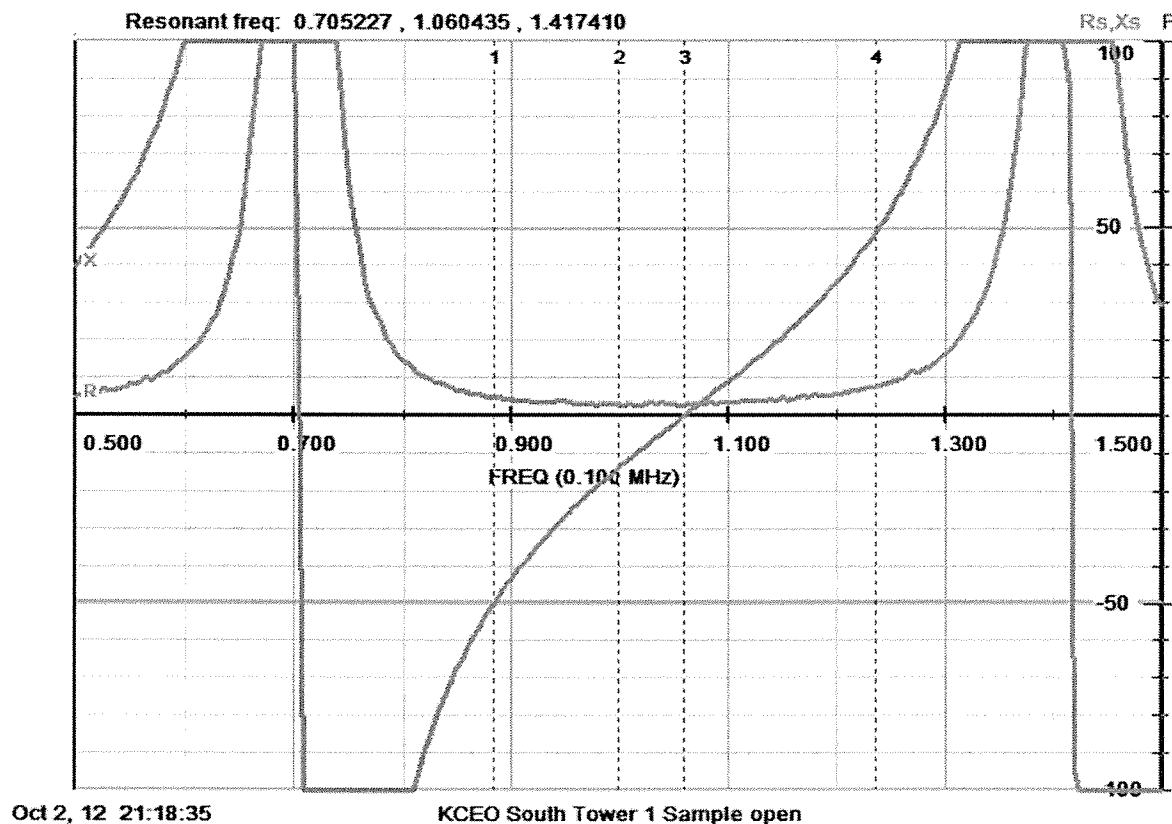


Marker	Freq	Rs	Xs	Zmag
[1]	0.883693	4.892	-50.301	
[2]	1.000000	3.177	-13.328	50.538
[3]	1.060435	2.879	-0.000	
[4]	1.237174	7.678	49.151	49.747

Markers: [1] = closest odd quarter wave minus 1/8 wavelength
[2] = operating frequency
[3] = closest odd quarter wave
[4] = closest odd quarter wave plus 1/8 wavelength

Mean Tower 1 Sample Line Zmag: 50.1409 ohms

Tower 2 (Center) Sample Line (open circuit)

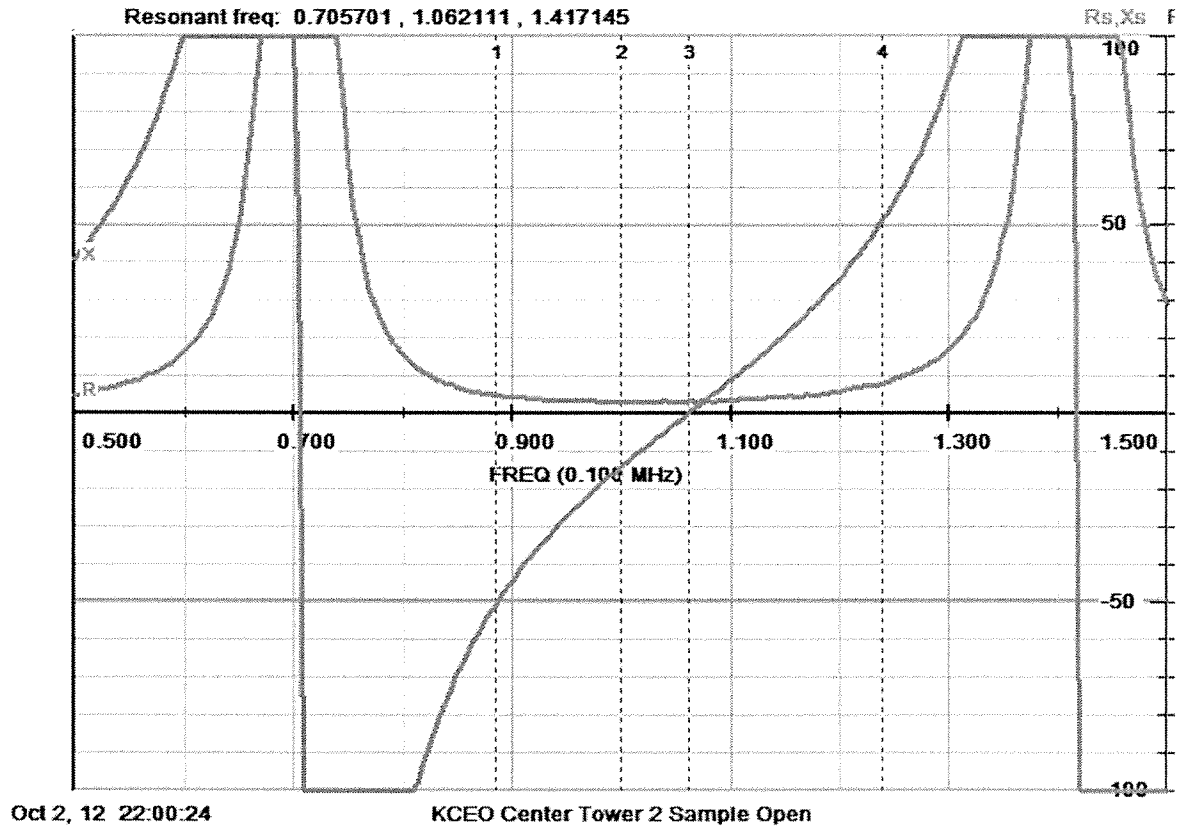


Marker	Freq	Rs	Xs	Zmag
[1]	0.885092	4.993	-51.088	51.331
[2]	1.000000	3.221	-14.424	
[3]	1.062111	3.368	0.000	
[4]	1.239129	7.868	50.638	51.245

Markers: [1] = closest odd quarter wave minus 1/8 wavelength
 [2] = operating frequency
 [3] = closest odd quarter wave
 [4] = closest odd quarter wave plus 1/8 wavelength

Mean Tower 2 Sample Line Zmag: 51.2880 ohms

Tower 3 (North) Sample Line (open circuit)

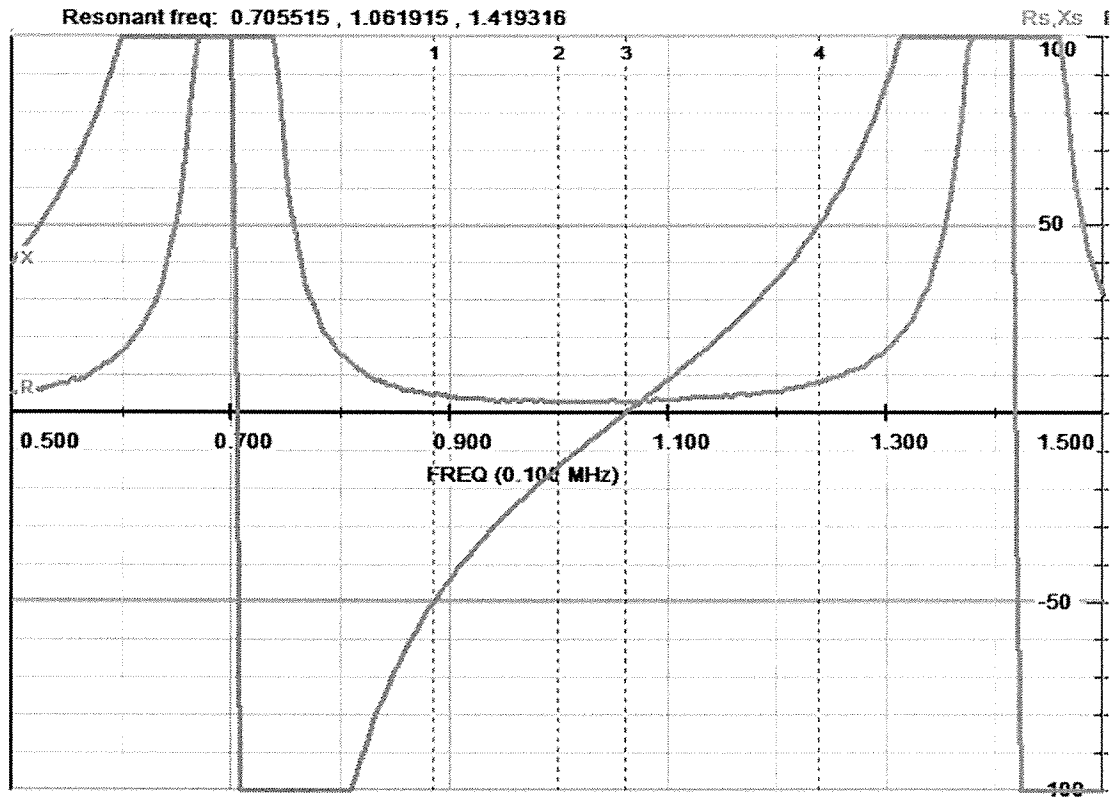


Marker	Freq	Rs	Xs	Zmag
[1]	0.884929	5.000	-50.592	50.839
[2]	1.000000	3.206	-14.234	
[3]	1.061915	3.095	0.000	
[4]	1.238901	8.275	49.834	50.516

Markers: [1] = closest odd quarter wave minus 1/8 wavelength
[2] = operating frequency
[3] = closest odd quarter wave
[4] = closest odd quarter wave plus 1/8 wavelength

Mean Tower 3 Sample Line Zmag: 50.6772 ohms

Tower 4 (West) Sample Line (open circuit)

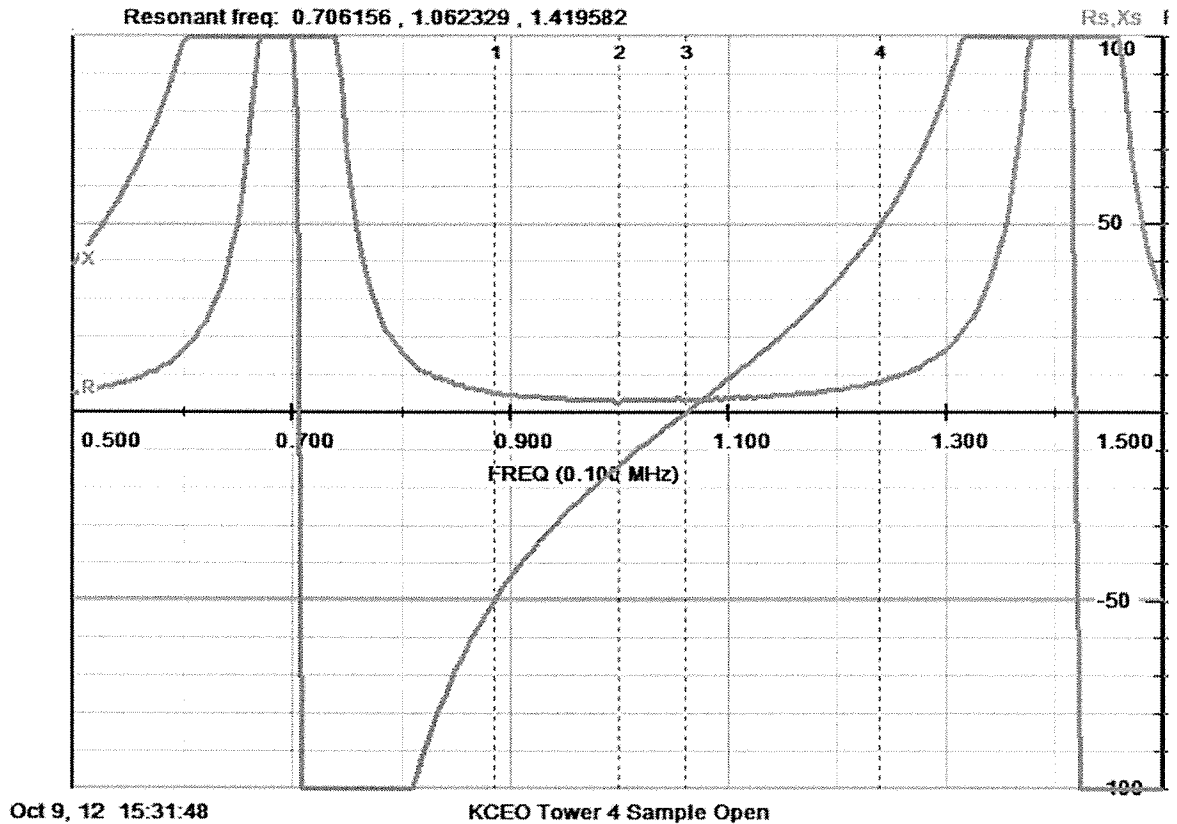


Marker	Freq	Rs	Xs	Zmag
[1]	0.885274	50.214	-49.933	50.214
[2]	1.000000	2.344	-14.359	
[3]	1.062329	3.466	0.000	
[4]	1.239384	8.311	49.555	50.247

Markers: [1] = closest odd quarter wave minus 1/8 wavelength
[2] = operating frequency
[3] = closest odd quarter wave
[4] = closest odd quarter wave plus 1/8 wavelength

Mean Tower 4 Sample Line Zmag: 50.2305 ohms

Sample lines from antenna monitor end with TCT-3s connected at towers as normal:

Tower 1 (South)

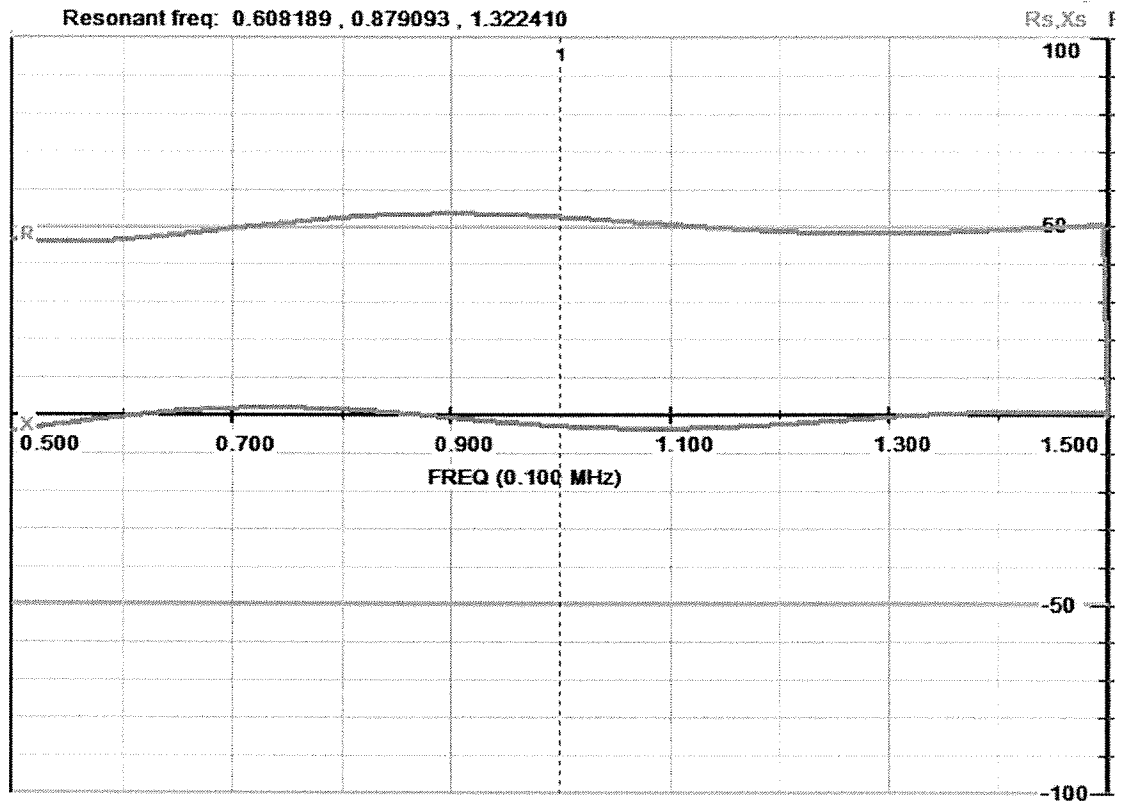


Oct 9, 12 19:59:46

KCEO Tower 1 with TCT

Impedance of Tower 1 line at 1000 KHz, monitor end with transformer connected at other end:

52.656 -j2.701ohms

Tower 2 (Center)

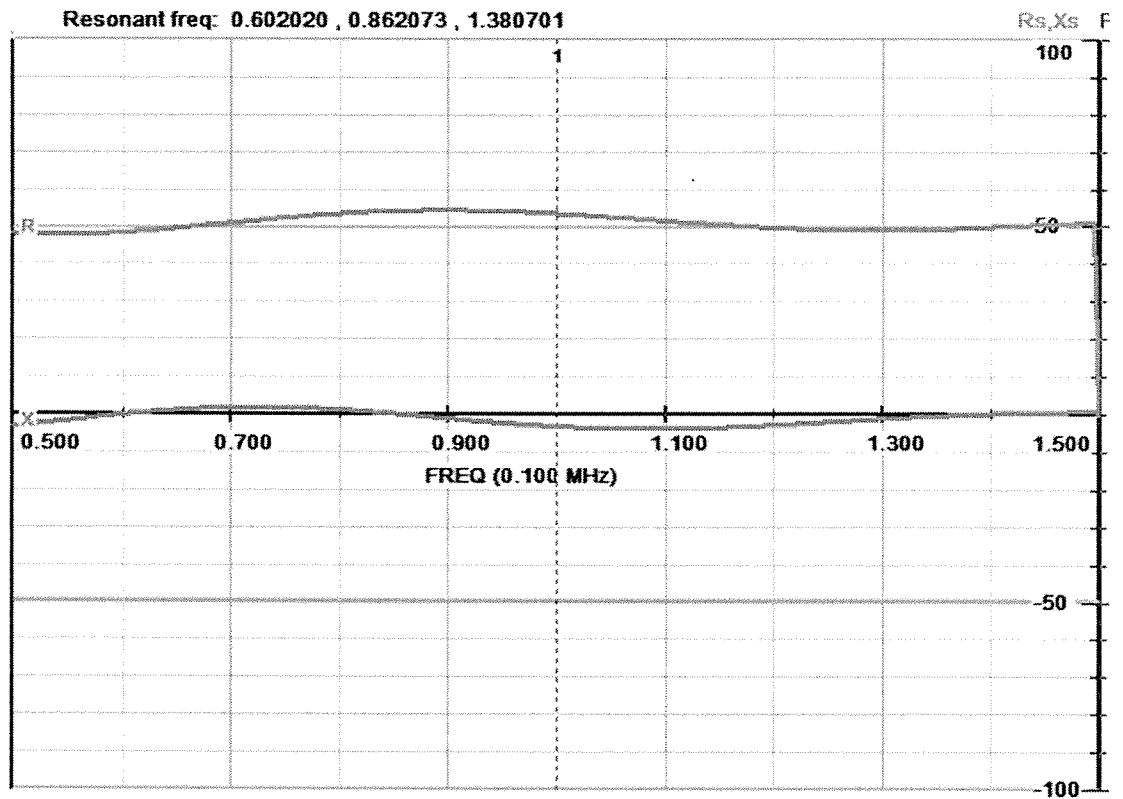


Oct 9, 12 19:58:17

KCEO Tower 2 with TCT

Impedance of Tower 2 line at 1000 KHz, monitor end with transformer connected at other end:

53.527 -j3.056 ohms


Tower 3 (North)

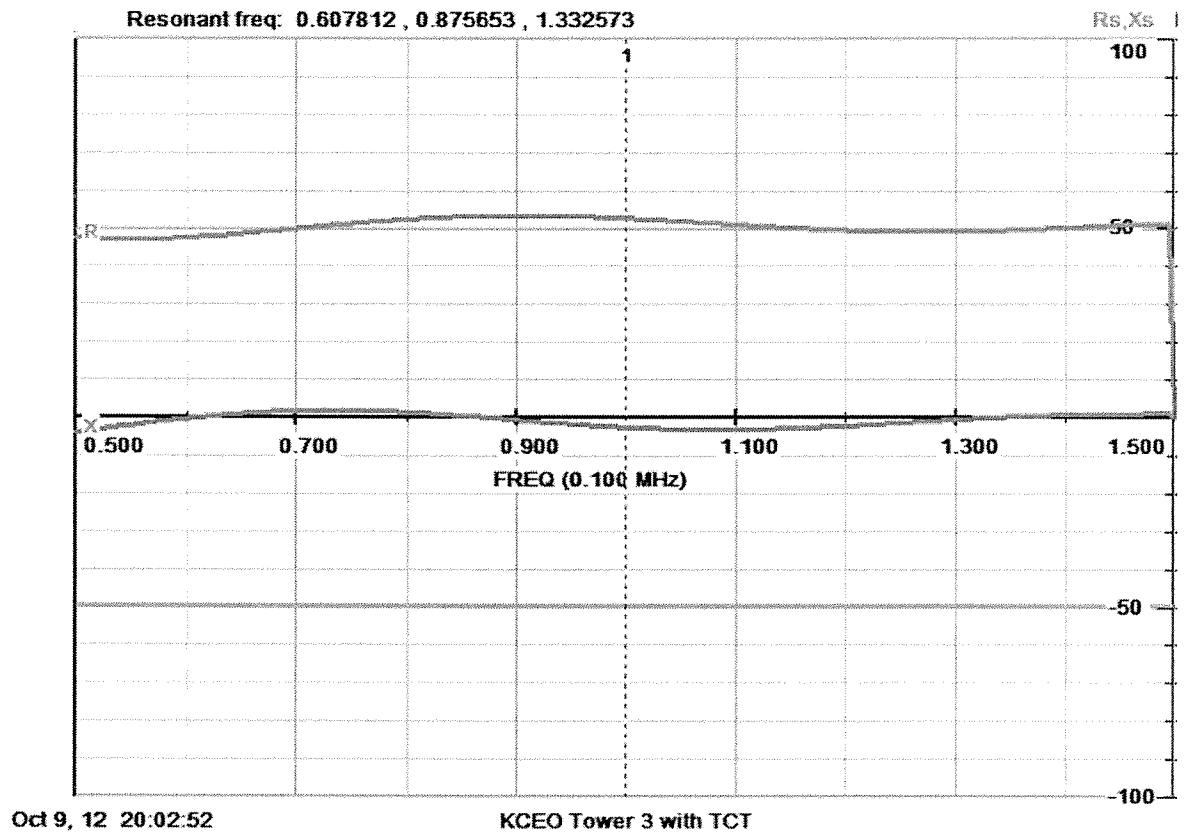

Impedance of Tower 3 line at 1000 KHz, monitor end with transformer connected at other end:

52.749 -j2.479 ohms

Tower 4 (West)

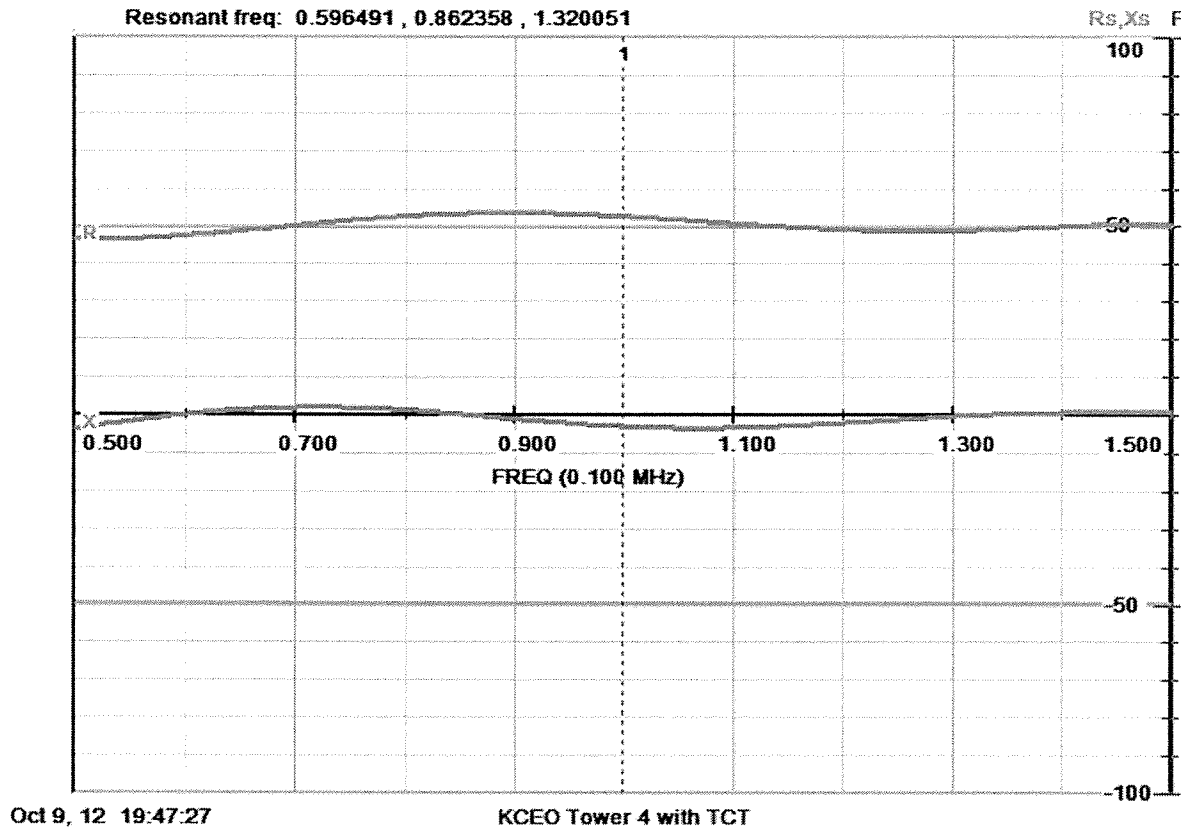

Impedance of Tower 4 line at 1000 KHz, monitor end with transformer connected at other end:

52.736 -j2.879 ohms

KCEO Daytime Reference Field Strength Measurements

[47 CFR 73.151(c)(3)]

<u>Point</u>	<u>Distance</u>	<u>mv/m</u>	<u>Coordinates (NAD 83)</u>	<u>Description</u>
<u>20° True (Minima, monitor point radial)</u>				
1:	0.98 km	180	33.241126,-117.266981	1504 Glacier
2:	1.64	84	33.246703,-117.264547	1652 Seattle Slew Way
3:	1.71	82	33.247296,-117.264348	Old Ranch Rd. at transformer box
<u>47° True (Maxima)</u>				
1:	2.15	44	33.245963,-117.253651	1657 Mission Meadows
2:	2.23	39	33.246488,-117.253044	5719 Shetland Court
3:	2.36	42	33.247273,-117.251952	1714 Shire Ave.
<u>65° True (Minima, monitor point radial)</u>				
1:	2.80	37	33.243469,-117.243370	2804 Hutchinson
2:	3.51	31	33.246123,-117.236344	Harris Drive by mailbox cluster
3:	3.90	39	33.247605,-117.232558	3040 Blackwell Drive
<u>238° True (Maxima)</u>				
1:	1.44	745	33.225886,-117.283725	1322 Napoli Street
2:	1.65	555	33.224970,-117.285595	4913 Verona Street
3:	2.03	560	33.223149,-117.289083	Avendia Mantilla @ park monument

Daytime pattern measurements taken 12:48 PM - 1:56 PM PDT, October 12, 2012 by the writer using Potomac Instruments FIM-41 s/n 1655.

KCEO Nighttime Reference Field Strength Measurements

[47 CFR 73.151(c)(3)]

<u>Point</u>	<u>Distance</u>	<u>mv/m</u>	<u>Coordinates (NAD 83)</u>	<u>Description</u>
<u>70° True (Maxima, minor lobe)</u>				
1:	1.54 km	112	33.237441,-117.255007	Guajone Lake Road at Ramona Drive
2:	2.29	100	33.239825,-117.247422	Bautista Ave. at electric meter
3:	3.38	68	33.243201,-117.236447	Hidden Lake Lane at fireplug
<u>114° True (Minima, monitor point radial)</u>				
1:	3.53	10	33.219877,-117.235928	Calle Jules at phone box
2:	4.19	11	33.217400,-117.229432	617 Lynette Court
3:	4.46	8.4	33.216434,-117.226829	Bobier @ North Gate Market
<u>209° True (Maxima, major lobe)</u>				
1:	1.96	238	33.217386,-117.280798	1745 Calle Platico
2:	2.28	178	33.214835,-117.282464	1779 Avenida Segovia
3:	2.56	172	33.212645,-117.283875	1849 Corte Segundo
<u>311.5° True (Minima, monitor point radial)</u>				
1:	1.20	16	33.239943,-117.280301	886 Pinewood
2:	1.32	12.5	33.240697,-117.281253	5174 Prado Court
3:	1.65	14.5	33.242656,-117.283840	5224 Silver Bluff Drive
<u>334° True (Maxima between nulls)</u>				
1:	4.85	5.5	33.252143,-117.273021	1023 Vista Pointe Blvd.
2:	5.05	3.45	33.250247,-117.272707	Douglas Dr. at Parkview Dr.
3:	5.33	4.9	33.253422,-117.273182	1095 Parkview by mailboxes
<u>354° True (Minima)</u>				
1:	1.95	20	33.273567,-117.294448	5446 Elderberry Way
2:	2.16	17.5	33.272028,-117.293488	5479 Loganberry Way (end of street)
3:	2.31	16	33.275892,-117.295769	5471 Gooseberry Way (end of street)

Nighttime pattern measurements taken 2:59 PM – 4:51 PM PDT, October 12, 2012 by the writer using Potomac Instruments FIM-41 s/n 1655.

Tower Survey [47 CFR 73.151(c)(1)(ix)]

Please note that the surveyor swapped the numbering between towers 1 and 3. The proper numbering is used below. The three KCEO towers were surveyed on October 5, 2012 by Mathew J. Muckerman a licensed Professional Land Surveyor in the state of California (license number 7603) of Excel Engineering, Escondido, California and were found to be as follows:

Tower 2 (C) to 1 (S): 218.7 feet (80.01°) at 191.10° True (theo. = 80° at 190° T)

Tower 2 (C) to 3 (N): 218.3 feet (79.87°) at 11.00° True (theo. = 80° at 10° T)

Tower 2 (C) to 4 (W): 245.4 feet (89.78°)* at 281.29° True (theo. = 86° at 280° T)*

A copy of the survey report is attached. This corresponds to a maximum relative spacing error of 0.78° and absolute bearing error of 1.29°. The theoretical tower spacings and orientation were used in the model.

* The tower 4 spacing is 3.78° longer than that called for in the construction permit, outside the allowable +/-1.5° tolerance. The construction permit is being modified to reflect this spacing. 89° spacing was used to tune the array and generate this report.

ESCONDIDO: 440 State Place • Escondido, CA 92029
(760)745-8118 • Fax (760)745-8134

Geodetic Coordinate Certification

KCEO-AM Radio Towers

Oceanside, California

	NORTHING (Y)	EASTING (X)
TOWER 1 (NORTHERLY TOWER)	2030100.9	6249622.2
TOWER 2 (CENTER TOWER)	2029886.3	6249582.2
TOWER 3 (SOUTHERLY TOWER)	2029671.3	6249542.2
TOWER 4 (WESTERLY TOWER)	2029932.0	6249341.1

ALL NORTHINGS AND EASTINGS ARE CA STATE PLANE, ZONE 6 COORDINATES


DATUM: NAD83

	BEARING FROM TOWER 2	DISTANCE FROM TOWER 2
TOWER 1	N 11°07'00" E	218.3'
TOWER 3	S 11°05'51" W	218.7'
TOWER 4	N 78°42'27" W	245.4'

ALL BEARINGS USE TRUE NORTH PER SPC CA 6

NOTE: TO CONVERT GRID NORTH TO TRUE NORTH, ADD 00°33'22.77"

PER THE FIELD SURVEY COMPLETED ON 10/5/2012 I HEREBY CERTIFY THAT THE STATE PLANE COORDINATES SHOWN HEREON ARE ACCURATE TO PLUS OR MINUS THREE (3) FEET HORIZONTALLY AND THAT RELATIVE TOWER BEARINGS AND DISTANCES ARE PLUS OR MINUS THREE (3) MINUTES AND PLUS OR MINUS 0.5 FEET RESPECTIVELY.




MATHEW J. MUCKERMAN

Construction Permit Conditions:

1 The permittee must submit a proof of performance as set forth in either Section 73.151(a) or 73.151(c) of the rules before program tests are authorized.

A proof of performance based on field strength measurements, per Section 73.151(a), shall include a complete nondirectional proof of performance, in addition to a complete proof on the (day) and (night) directional antenna system. The nondirectional and directional field strength measurements must be made under similar environmental conditions. The proof(s) of performance submitted to the Commission must contain all of the data specified in Section 73.186 of the rules. Permittees who elect to submit a moment method proof of performance, as set forth in Section 73.151(c), must use series-fed radiators. In addition, the sampling system must be constructed as described in Section 73.151(c) (2) (i).

The KCEO antenna system was verified using the "model proof" rules at 47 CFR 73.151(c). The towers are series-fed and the sample system meets the requirements of 47 CFR 73.151(c)(2)(i).

This is the required report and filing.

2 Permittee shall install a type accepted transmitter, or submit application (FCC Form 301) along with data prescribed in Section 73.1660(b) should non-type accepted transmitter be proposed.

KCEO has installed a Broadcast Electronics AM-6A which the transmitter manufacturer states is type accepted for the power levels and intended service.

3 A license application (FCC Form 302) to cover this construction permit must be filed with the Commission pursuant to Section 73.3536 of the Rules before the permit expires.

This is the required application for covering license and is being filed prior to the October 22, 2012 expiration date.

4 Licensee shall be responsible for satisfying all reasonable complaints of blanketing interference within the 1 V/m contour as required by Section 73.88 of the Commission's rules.

The transmitter site has been used as such for decades and any new blanketing interference complaints inside the 1 V/m contour are expected to be few in number. The permittee will satisfy all reasonable complaints which to arise in the first year of operation.

5 Day and night arrays consist of towers South, Center, North and West, referenced in that order.

The tower numbering in this report and on the FCC Form 302-AM are 1 (South), 2 (Center), 3 (North) and 4 (West) as specified in the construction permit.


6 Ground system consists of 120 equally spaced, buried, copper radials about the base of each tower, each 75 meters in length except where intersecting radials are shortened and bonded to a transverse copper strap midway between adjacent towers.

The ground system is as described. Some tower 4 radials are shortened at the property line.

Preparer's Certification

This engineering report was prepared by me from data personally collected on site using equipment owned and maintained by me for this purpose. It is true and correct to the best of my knowledge and belief. The KCEO antenna system is properly constructed and adjusted and program test authority is hereby requested.

October 13, 2012



Mark A. Mueller