

**FEDERAL COMMUNICATIONS COMMISSION**  
**445 12th STREET SW**  
**WASHINGTON DC 20554**

MEDIA BUREAU  
AUDIO DIVISION  
APPLICATION STATUS: (202) 418-2730  
HOME PAGE: [www.fcc.gov/mb/audio](http://www.fcc.gov/mb/audio)

PROCESSING ENGINEER: Joseph Szczesny  
TELEPHONE: (202) 418-2700  
FACSIMILE: (202) 418-1410  
MAIL STOP: 1800B2-JBS  
EMAIL ADDRESS: [Joseph.Szczesny@fcc.gov](mailto:Joseph.Szczesny@fcc.gov)

May 29, 2014

Joseph A. Belisle, Esq.  
Leibowitz & Associates, P.A.  
4400 Biscayne Boulevard, Suite 880  
Miami, Florida 33137

Re: JUA (AM), Pine Island Center, FL  
Facility Identification Number: 48329  
Fort Myers Broadcasting Company (FMBC)  
Special Temporary Authority (STA)  
BESTA-20140508AAC


Dear Mr. Belisle:

This is in reference to the request filed on May 5, 2014. FMBC requests further extension of the STA originally granted on January 25, 1989, for operation of Station WJUA during nighttime hours as modified in 2012 using the facilities specified in BMML-20120410AEL to overcome interference from a co-channel Cuban station. In support of the request, FMBC states that the interference continues based upon recent monitoring.

Accordingly, the request for STA extension is **HEREBY GRANTED**. WJUA may continue to operate during nighttime hours with 2.2 kW, employing three of the licensed daytime towers with parameters as indicated in the attached specifications. This authority is subject to termination upon reduction of power or cessation of operation by the Cuban station or upon Commission instruction to FMBC, at which time Station WJUA must return to licensed operation. FMBC must reduce power if complaints of interference are received.

This authority expires **November 29, 2014**.

Sincerely,

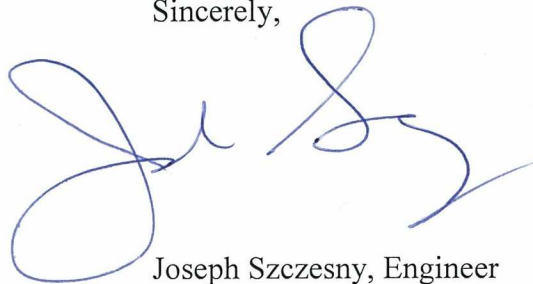

Joseph Szczesny, Engineer  
Audio Division  
Media Bureau

Attachment: Directional Antenna Specifications  
cc: FMBC

SPECIAL TEMPORARY AUTHORITY  
 SPECIFICATIONS FOR NIGHTTIME OPERATION OF  
 WJUA (AM), Pine Island Center, FL (Facility ID # 48329)

Revised 11/1/2012

Frequency: 1200 kHz      Nominal Power: 2.20 kW      Antenna Input Power: 2.38 kW  
 Common Point Current: 6.89 Amperes      Common Point Resistance: 50 ohms

Description of Directional Antenna System:

Geographic coordinates: (center of array)	26° 42' 52" N, 82° 02' 46" W (NAD 1927)
Number and Type of Elements:	Three vertical, guyed, series-excited steel radiators of uniform cross section.
Theoretical RMS:	318.7 mV/m/km
Standard RMS:	334.9 mV/m/km
Q factor:	12.1 mV/m
Height above Insulators:	59.4 meters (85.6°)
Overall Height:	60.3 meters
Spacing and Orientation:	Towers are spaced 60° on a line bearing 130° True.
Ground System:	120 copper wire radials, each 62.5 m in length, except where terminated at the property boundary or where bonded to a copper strap midway between adjacent towers.

Theoretical Specifications:

Tower:	#1 (NW)	#2 (C)	#3 (SE)
Phasing:	0.0°	-123.3°	113.5°
Field Ratio:	1.0	2.0	1.0

Operating Parameters\*

Phase:	121.1°	0.0°	-128.2°
Current Ratio:	0.568	1.00	0.467

\*As indicated by Potomac Instruments AM-19 (204) antenna Monitor.

FMBC shall perform measurements as described in Section 73.155 at least once every 24 months.